


GRID CONTROL RECTIFIER TUBE

Xenon Gas Filling

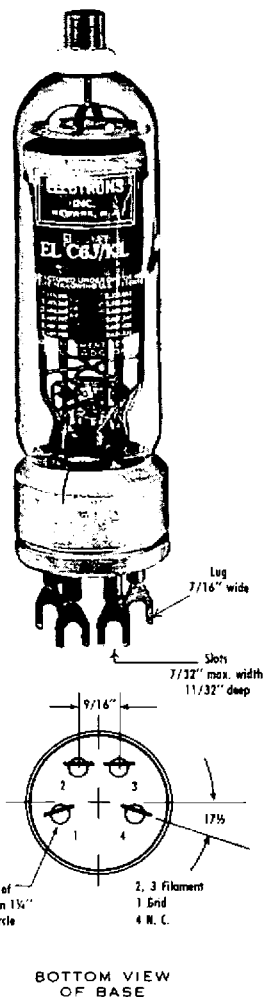

Maximum Rated Anode Current	
D-c. Meter Value-Continuous	6.4 amps
D-c. Meter Value-Overload less than 3 sec.	12.8 amps
Averaging Time	6 secs
Oscillograph Peak-Continuously recurring	77 amps
Peak Forward Voltage (Max. Instantaneous)	1000 volts
Peak Inverse Voltage (Max. Instantaneous)	1250 volts
Max. Commutation Factor (V/usec x A/usec)	130

Filament	
Voltage	2.5 volts
Current	21±2 amps
Heating Time (minimum)	60 secs

Average Arc Drop	
Average Tube	11 volts
Highest Tube	15 volts

Anode Starting Voltage @ +3V d-c grid voltage	
Average Tube	40 volts
Highest Tube	80 volts

Max. Anode Reverse Current	100 uamps
----------------------------	-----------

Grid Characteristics	
Critical Grid Voltage @ 1000 p.f.v.	-2.0 to -15 volts
Critical Grid Current	Less than 20 uamps
Grid-Anode Capacitance	approx. 5 uuf
Grid-Filament Capacitance	approx. 21 uuf

Maximum Negative Grid Voltage	100 volts
Deionization Time	Less than 1000 usecs

Max. Peak A-c Fault Current (Max. duration 0.1 sec.)	770 amps
---	----------

Ambient Temperature Limits	-55° to +75° C
----------------------------	----------------

Overall Dimensions	2-3/16" x 9-1/4" max.
--------------------	-----------------------

Weight	8 ozs.
--------	--------

Connections	
Filament and Grid	Lug type base
Anode	C1-5 cap (0.56" dia.) with ceramic insulator.

The filament must be lit before drawing d-c. load current

The anode is designed to operate at red heat when under full load. All of the above values are for returns to the filament transformer center tap. Filament pin #2 should be negative with respect to pin #3 during the anode conduction period.

The Engineering Manual contains additional information which should be considered in the circuit design.

ELECTRONICS, INCORPORATED
127 Sussex Avenue
Newark 3, New Jersey

