



12AQ5

BEAM POWER AMPLIFIER

7-Pin Miniature Type

TENTATIVE DATA

RCA-12AQ5 is a beam power amplifier of the 7-pin miniature type intended primarily for use as the output amplifier of automobile radio receivers operating from a 12-volt storage battery. It may also be used in the output stage of ac-operated radio receivers.

The 12AQ5 can provide high power output because of its high power sensitivity and high efficiency. For example, in class A₁ amplifier service, a single 12AQ5 operated with a plate and grid-No.2 voltage of 250 volts, can deliver a maximum-signal power output of 4.5 watts with a peak driving voltage of only about 12 volts. These features together with relatively low plate-current drain make the 12AQ5 especially suitable for use in the output stage of automobile receivers.

Within its maximum ratings, the 12AQ5 is the performance equivalent of the larger glass type 12V6-GT.

GENERAL DATA

Electrical:

Heater, for unipotential Cathode:

Voltage (AC or DC)	12.6	volts
Current	0.225	amp

Direct Interelectrode Capacitances (Approx., without external shield):

Grid No.1 to Plate	0.35	μμf
Input	8.3	μμf
Output	8.2	μμf

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-5/8"
Maximum Seated Length	2-3/8"
Length from Base Seat to Bulb Top (Excluding Tip)	2" ± 3/32"
Maximum Diameter	3/4"
Bulb	T-5-1/2
Base	Small-Button Miniature 7-Pin (JETEC No.E7-1)

AF POWER AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	250 max.	volts
GRID-NO.2 (SCREEN) VOLTAGE	250 max.	volts
PLATE DISSIPATION	12 max.	watts
GRID-NO.2 INPUT	2 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	90 max.	volts
Heater positive with respect to cathode	90 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)*	250 max.	°C

Typical Operation and Characteristics:

Plate Voltage	180	250	volts
Grid-No.2 Voltage	180	250	volts
Grid-No.1 (Control-Grid) Voltage	-8.5	-12.5	volts
Peak AF Grid-No.1 Voltage	8.5	12.5	volts
Zero-Signal Plate Current	29	45	ma
Max.-Signal Plate Current	30	47	ma
Zero-Signal Grid-No.2 Current (Approx.)	3	4.5	ma
Max.-Signal Grid-No.2 Current (Approx.)	4	7	ma
Plate Resistance (Approx.)	58000	52000	ohms
Transconductance	3700	4100	μmhos
Load Resistance	5500	5000	ohms
Total Harmonic Distortion	8	8	per cent
Max.-Signal Power Output	2.0	4.5	watts

Maximum Circuit Values:

Grid-No.1 - Circuit Resistance:

For fixed bias	0.1 max.	megohm
For cathode bias	0.5 max.	megohm

AF POWER AMPLIFIER - Class AB₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	250 max.	volts
GRID-NO.2 (SCREEN) VOLTAGE	250 max.	volts
PLATE DISSIPATION	12 max.	watts
GRID-NO.2 INPUT	2 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	90 max.	volts
Heater positive with respect to cathode	90 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)*	250 max.	°C

Typical Operation:


Unless otherwise indicated, values are for 2 tubes

Plate Voltage	250	volts
Grid-No.2 Voltage	250	volts
Grid-No.1 (Control-Grid) Voltage#	-15	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage	30	volts
Zero-Signal Plate Current	70	ma
Max.-Signal Plate Current	79	ma
Zero-Signal Grid-No.2 Current (Approx.)	5	ma
Max.-Signal Grid-No.2 Current (Approx.)	13	ma
Plate Resistance (Approx. per tube)	60000	ohms
Transconductance (per tube)	3750	μmhos
Effective Load Resistance (Plate to plate)	10000	ohms
Total Harmonic Distortion	5	per cent
Max.-Signal Power Output	10	watts

Maximum Circuit Values Per Tube:*

Grid-No.1 - Circuit Resistance:#


For fixed bias	0.1 max.	megohm
For cathode bias	0.5 max.	megohm

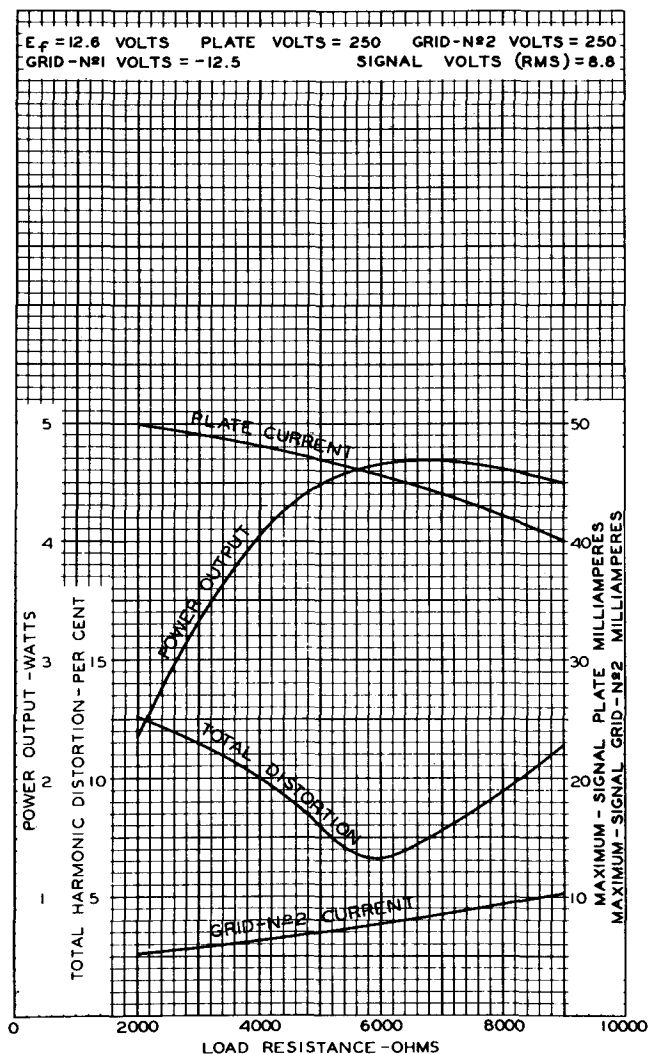

92CM-7954

Fig. 3 - Operation Characteristics of
Type 12AQ5


DIMENSIONAL OUTLINE

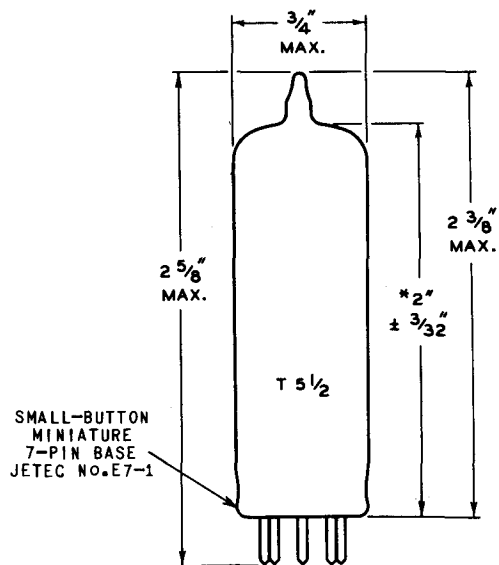

* MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY RING GAUGE OF 7/16" I.D.

SOCKET CONNECTIONS

Bottom View



- | | |
|--------------------|-------------------|
| PIN 1 - GRID NO.1 | PIN 4 - HEATER |
| PIN 2 - GRID NO.3, | PIN 5 - PLATE |
| CATHODE | PIN 6 - GRID NO.2 |
| PIN 3 - HEATER | PIN 7 - GRID NO.1 |

Devices and arrangements shown or described herein may use patents of RCA or others. Information contained herein is furnished without responsibility by RCA for its use and without prejudice to RCA's patent rights.