

CHARACTERISTICS

GENERAL DATA

Focusing Method		Magnetic	
Deflecting Method		Magnetic	
Deflection Angle (Approx.)		50 Degrees	
Phosphors* Fluorescence	Phosphorescence	Persistence	
P4	White	—	Medium
P7	Blue	Yellow	Long
P16	Violet	—	Extremely Short
P19	Orange	Orange	Long
P25	Orange	Orange	Long

Faceplate Gray, Spherical-Aluminized

*In addition to the types shown, the 10ANP- can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage		6.3 Volts
Heater Current		$0.3 \pm 10\%$ Ampere
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes		5 pf
Grid No. 1 to All Other Electrodes		6 pf
Grid No. 2 to All Other Electrodes		5 pf

MECHANICAL DATA

Minimum Useful Screen Diameter		9 Inches
Overall Length		16 Inches
Bulb Contact (Recessed Small Cavity Cap)		J1-21
Base ¹		E9-37
Basing		9NB
Bulb Contact Alignment		
Plane of J1-21 cap passes halfway between Pins No. 1 and No. 9		± 10 Degrees
J1-21 Cap on Same Side as Pins No. 1 and No. 9		

RATINGS

MAXIMUM RATINGS (Design Maximum Values)

Anode Voltage		12,000 Volts	dc
Grid No. 2 Voltage		450 Volts	dc
Grid No. 1 Voltage			
Negative Bias Value		200 Volts	dc
Positive Bias Value		0 Volts	dc
Positive Peak Value		0 Volts	
Peak Heater-Cathode Voltage			
Heater Negative with Respect to Cathode		180 Volts	
Heater Positive with Respect to Cathode		180 Volts	

TYPICAL OPERATING CONDITIONS



Anode Voltage ²		9000 Volts	dc
Grid No. 2 Voltage		250 Volts	dc
Grid No. 1 Voltage ³		-15 to -45 Volts	dc
Focusing Coil Current (Approx.) ⁶		40 to 60 Ma	dc
Linewidth A ⁴		0.013 Inch	Max.
Spot Position (Undelected) ⁵		$\frac{1}{2}$ Inch	
Modulation ⁴		40 Volts	Max.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance		1.5 Megohms Max.
-------------------------------	-------	------------------

QUICK REFERENCE DATA

Special Purpose Tube
10" Round Glass Type
Spherical Faceplate
Gray Glass
Aluminized Screen
Magnetic Deflection
Magnetic Focus
 $\frac{7}{8}$ " Diameter Neck
Miniature Base
6.3 Volts—300 Ma Heater



**SYLVANIA ELECTRIC
PRODUCTS INC.**

Electronic Components Group
ELECTRONIC TUBE DIVISION
SENECA FALLS, NEW YORK

A Technical Publication

JUNE, 1965

PAGE 1 OF 2

File Under

SPECIAL AND GENERAL
PURPOSE CATHODE RAY TUBES

NOTES:

1. A socket with a center opening to clear the tubulation should be used. Care should be taken in handling the tube to avoid damaging the exposed tubulation and bending the base pins.
2. Brilliance and definition decrease with decreasing accelerator voltage. In general, accelerator voltage should not be less than 7000 volts.
3. Visual extinction of the undeflected focused spot.
4. Measured per MIL-E-1 specification at an anode current of 400 μ a.
5. The center of the undeflected focused spot will fall within a circle of 1/2-inch radius concentric with the center of the tube face with the tube shielded.
6. Focusing coil current measured at an accelerator current of 100 μ a, with the center of air gap of JEDEC Focus Coil No. 127, or equivalent, located 2-1/2 inches from reference line.
7. The P16, P19, and P25 screens can be permanently damaged if current density is permitted to rise too high. To prevent burning, minimum beam current densities should be employed.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

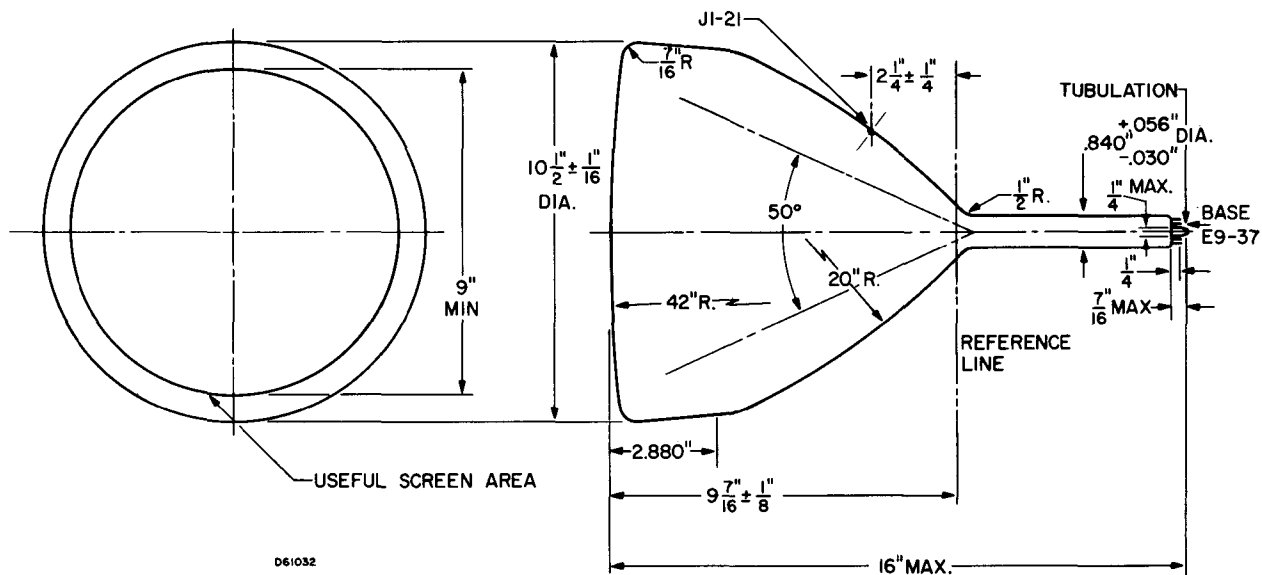


DIAGRAM NOTE:

1. Reference line is determined by the point where leading edge of JEDEC G-112 reference line gauge (a cylinder 2" long and 1.500" + .003-.000" I.D.) will stop.