

DIAMETER 10" NOMINAL

10MW4A

Television Monitor Tube

MAGNETIC FOCUS. MAGNETIC DEFLECTION


10MW4A

DATA

GENERAL:

Heater: Voltage	4.0	a.c. or d.c. volts.
Current	1.0	amp.
Direct Inter-electrode Capacitances.		
Modulator to all other electrodes		9 μ f.
Cathode to all other electrodes		9 μ f.
Screen		Aluminium Backed.
Fluorescence		White.
Persistence	Short (5m sec./25m sec. for 1% initial brightness)	
Focusing Method		Magnetic.
Deflecting Method		Magnetic.
Overall Length		483 $\pm$ 10 mm.
Greatest Diameter of Bulb		257 mm.
Minimum Useful Screen Diameter		230 mm.
Mounting Position		Any.
Anode Cap		Cavity Cap BSS448/CT8.
Base		International Octal.

- Pin 1—No connection.
Pin 2—Heater.
Pin 3—Pin omitted.
Pin 4—Pin omitted.



- Pin 5—Modulator.
Pin 6—Pin omitted.
Pin 7—Heater.
Pin 8—Cathode.
Cap—Anode.

Maximum Ratings:


Final Anode Voltage	11000 volts.
Modulator Voltage:	
Negative bias value	130 volts.
Positive bias value	0 volts.
Peak Heater-Cathode Voltages:	
Heater negative with respect to cathode	150 volts.
Heater positive with respect to cathode	150 volts.

Typical Operating Conditions:

Anode Voltage	10000 volts.
Modulator Voltage for cut-off	-70 to -120 volts.
Focusing-Coil Current—See Note 3	550 A.T.
Spot Position	See Note 4

Note 3. Focusing Coil positioned with centre line of air gap approximately 80 mm. from reference line (see outline drawing).

Note 4. The centre of the undeflected unfocused spot will fall within a circle having 10 mm. radius concentric with the centre of the tube face.

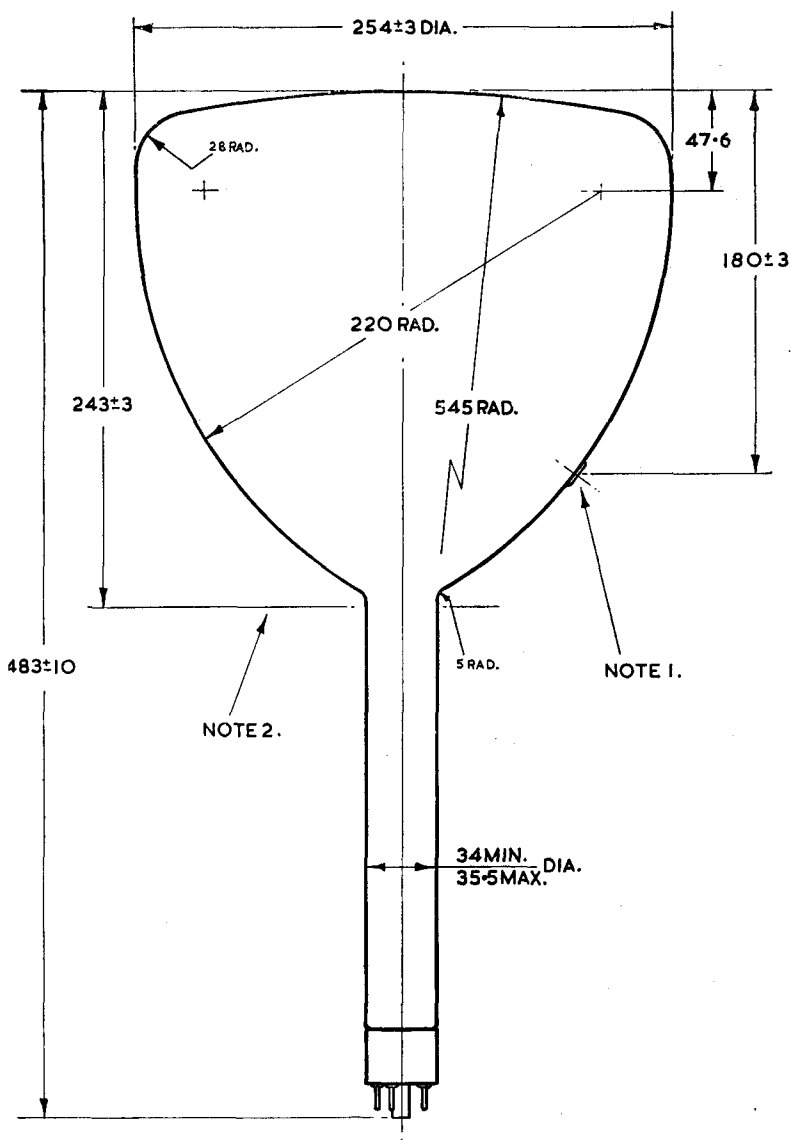

ALL SIZES IN MILLIMETRES.

Note 1. The plane through the tube axis and the spigot key may vary from the plane through the tube axis and the anode cap. by an angular tolerance (measured about the tube axis) of 10° . The anode cap is on the same side of the tube as the spigot key.

Note 2. Reference line is determined by position where a gauge 36 mm. I.D. and 50 mm. long will rest on bulb cone.