

High-Mu Triode— Sharp-Cutoff Pentode

9-PIN MINIATURE TYPE

For Equipment Having Series Heater-String Arrangement

The 10HF8 is the same as the 6HF8 except for the following items:

Heater, for Unipotential Cathodes:

Voltage (AC or DC).	10.5	volts
Current	0.45 ± 6%	amp
Warm-up time (Average).	11	sec

11CY7

Dual Triode With High-Mu Unit and Low-Mu Unit

9-PIN MINIATURE TYPE


For Equipment Having Series Heater-String Arrangement

The 11CY7 is the same as the 6CY7 except for the following items:

Heater, for Unipotential Cathodes:

Voltage (AC or DC).	11	volts
Current	0.45 ± 6%	amp
Warm-up time (Average).	11	sec



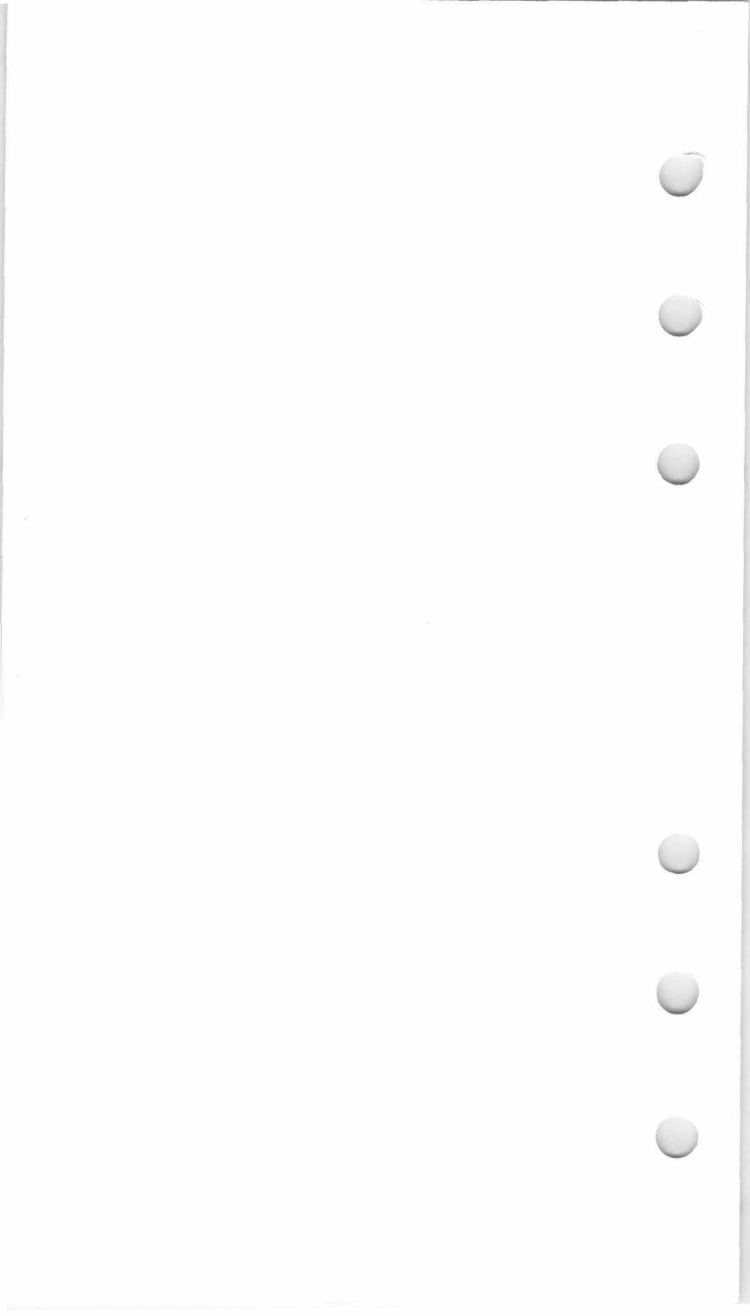

10LE8

Twin Dual-Control Pentode

The 10LE8 is the same as the 6LE8 except for:

Heater Characteristics and Ratings

Current	0.450 $\pm$ 0.030	A
Voltage (AC or DC) at 0.450 A	10	V
Warm-up time (Average).	11	s

11AR11

Semiremote-Cutoff Twin Pentode

DUODECAR TYPE

The 11AR11 is the same as the 6AR11 except for:

Heater Characteristics and Ratings

Current	0.450 $\pm$ 0.030	A
Voltage (AC or DC) at 0.450 A	11.2	V
Warm-up time (Average).	11	s

11CY7

Dual Triode

With High-Mu Unit and Low-Mu Unit

The 11CY7 is the same as the 6CY7 except for:

Heater Characteristics and Ratings

Current	0.450 $\pm$ 0.030	A
Voltage (AC or DC) at 0.450 A	11.0	V
Warm-up time (Average).	11	s

11DS5

Beam Power Tube

The 11DS5 is the same as the 6DS5 except for:

Heater Characteristics and Ratings

Current	0.450 $\pm$ 0.030	A
Voltage (AC or DC) at 0.450 A	11.2	V
Warm-up time (Average).	11	s

