

FERRANTI

RADAR TUBES

12in. diameter Radar Display Tubes with metal backed screens, magnetic deflection and low voltage electrostatic focus.

FOCUS Low Voltage.
Electrostatic.

DEFLECTION Magnetic.

SCREEN.

	12/03HB	12/03JB
Phosphor	Type 'H'	Type 'J'
Fluorescence	Orange	Blue
Afterglow	Orange	Yellow
Persistence	very long	long.

For further details, refer to the relevant phosphor characteristics at the front of this section of the handbook.

Both Types have metal backed screens.

PHYSICAL DETAILS.

Base		BI2A (Duodecal).
Anode Cap		CT8 Cavity Type.
Max. Overall Length		485 mm.
Mounting Position		Any

For other dimensions see drawing overleaf.

These tubes have an external conductive coating which may be used for E.H.T. smoothing.

BASE CONNECTIONS.

Pin 1—Heater.	Pin 7—No Connection.
Pin 2—Grid.	Pin 8—No Pin.
Pin 3—No Pin.	Pin 9—No Pin.
Pin 4—No Pin.	Pin 10—1st Anode.
Pin 5—No Pin.	Pin 11—Cathode.
Pin 6—3rd Anode.	Pin 12—Heater.
Side Contact—2nd Anode, 4th Anode.	

HEATER.

*Heater Voltage		6.3 volts.
Heater Current		0.3 amp.

RATINGS.

Max. A ₁ Voltage		500 volts.
Max. A ₂ + A ₄ voltage		15 kV.
Max. Pos. A ₃ Voltage		+500 volts.
Max. Neg. A ₃ voltage		-500 volts.
Min. A ₁ voltage		200 volts.
Min. A ₂ + A ₄ voltage.		8 kV.
Max. V _{h-k}		200 volts.
Max. R _{g-k}		1.5 MΩ
Max. R _{h-k}		1.0 MΩ

TYPICAL OPERATION.

Heater Voltage		6.3 volts.
1st Anode Voltage		300 volts.
2nd and 4th Anode voltage		12 kV.
†3rd Anode voltage for focus		-300 to + 300 volts.
V _g for visual cut off		-30 to -70 volts.

CAPACITANCES.

C _{k-all}		<8 pF.
C _{g-all}		<8 pF.
Ca-ext. coating		1200 pF. approx.


†This screen material is liable to burn if operated with a spot which is stationary or slow moving. The tube should not be operated under such conditions, even at low beam current.

*When used for series operation, the surge heater voltage should not exceed 9.5 volts r.m.s. and a current limiting device should be incorporated in the circuit to limit switching surge.

†The point of optimum focus lies between these values.

12/03 HB

12/03 JB

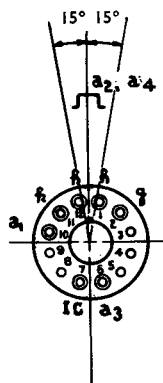


Base
Connections
Underside View
of Base





12/03 HB

12/03 JB

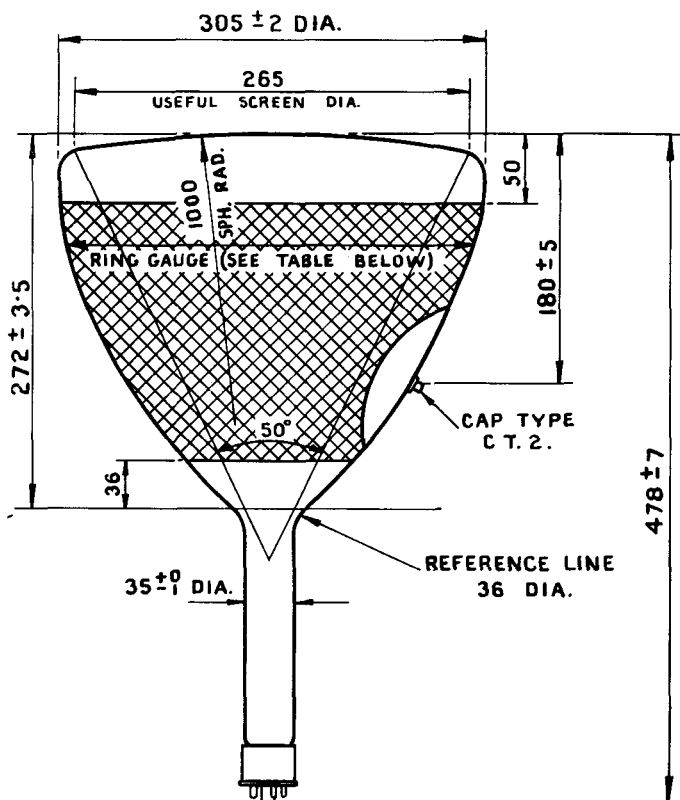

RING GAUGE	DISTANCE FROM CENTRE OF SCREEN		
280	96	$\pm$	10
230	150	$\pm$	9
180	191	$\pm$	8
130	222	$\pm$	7
80	249	$\pm$	6