

TUNG-SOL

TWIN TRIODE

MINIATURE TYPE

COATED UNIPOTENTIAL CATHODE


HEATER

SERIES
12.6 VOLTS
0.15 AMP.


PARALLEL
6.3 VOLTS
0.3 AMP.

AC OR DC

FOR 12.6 VOLT OPERATION APPLY HEATER VOLTAGE BETWEEN PINS #4 AND #5. FOR 6.3 VOLT OPERATION APPLY HEATER VOLTAGE BETWEEN PIN #9 AND PINS #4 AND #5 CONNECTED TOGETHER.



GLASS BULB
SMALL BUTTON
9 PIN BASE E9-1
OUTLINE DRAWING
JEDEC 6-2



BOTTOM VIEW
BASING DIAGRAM
JEDEC 9A

THE 12AU7 COMBINES TWO INDEPENDENT MEDIUM-MU INDIRECTLY HEATED CATHODE TYPE TRIODES IN THE SMALL 9 PIN BUTTON CONSTRUCTION. IT IS ADAPTABLE TO APPLICATION EITHER AS AN AUDIO FREQUENCY AMPLIFIER OR AS COMBINED OSCILLATOR AND MIXER.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
TRIODE UNIT 1			
GRID TO PLATE: (G TO P)	1.5	1.5	pf
INPUT: G TO (H+K)	1.8	1.6	pf
OUTPUT: P TO (H+K)	2.0	0.40	pf
TRIODE UNIT 2			
GRID TO PLATE: (G TO P)	1.5	1.5	pf
INPUT: G TO (H+K)	1.8	1.6	pf
OUTPUT: P TO (H+K)	2.0	0.32	pf

^AEXTERNAL SHIELD #315 CONNECTED TO CATHODE OF UNIT UNDER TEST.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

EACH TRIODE UNIT

	CLASS A ₁ ^B AMPLIFIER	VERTICAL ^B DEFLECTION AMPLIFIER	
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE:	200	200	VOLTS
TOTAL DC AND PEAK			
HEATER POSITIVE WITH RESPECT TO CATHODE:	100	100	VOLTS
DC			
TOTAL DC AND PEAK	200	200	VOLTS
MAXIMUM PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PEAK POSITIVE PLATE VOLTAGE (ABSOLUTE MAXIMUM)	---	1200	VOLTS
MAXIMUM PLATE DISSIPATION: ^C			
EACH PLATE	2.75	2.75	WATTS
BOTH PLATES	5.5	5.5	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	---	250	VOLTS
MAXIMUM CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	---	60	MA.
MAXIMUM GRID CIRCUIT RESISTANCE			
FIXED BIAS OPERATION	0.25	---	MEGOHM
CATHODE BIAS OPERATION	1.0	2.2	MEGOHMS

^BFOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE NOT TO EXCEED 15 PERCENT OF A SCANNING CYCLE.

^CIN STAGES OPERATING WITH GRID-LEAK BIAS, AN ADEQUATE CATHODE BIAS RESISTOR OR OTHER SUITABLE MEANS IS REQUIRED TO PROTECT THE TUBE IN THE ABSENCE OF EXCITATION.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS (CONT'D)

EACH TRIODE UNIT



	VERTICAL ^D DEFLECTION OSCILLATOR	HORIZONTAL ^D DEFLECTION OSCILLATOR	
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE:			
TOTAL DC AND PEAK	200	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE:			
DC	100	100	VOLTS
TOTAL DC AND PEAK	200	200	VOLTS
MAXIMUM DC PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PLATE DISSIPATION:			
EACH PLATE	2.75	2.75	WATTS
BOTH PLATES	5.5	5.5	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	400	600	VOLTS
MAXIMUM AVERAGE CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	60	300	MA.
MAXIMUM GRID CIRCUIT RESISTANCE	2.2	2.2	MEG OHMS



^D FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE NOT TO EXCEED 15 PERCENT OF A SCANNING CYCLE.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER - EACH TRIODE UNIT

PLATE VOLTAGE	100	250	VOLTS
GRID VOLTAGE	0	-8.5	VOLTS
PLATE CURRENT	11.8	10.5	MA.
PLATE RESISTANCE (APPROX.)	6 500	7 700	OHMS
TRANSCONDUCTANCE	3 100	2 200	μMHOS
AMPLIFICATION FACTOR	20	17	
GRID VOLTAGE FOR $I_b = 10 \mu A$. (APPROX.)	---	- 24	VOLTS

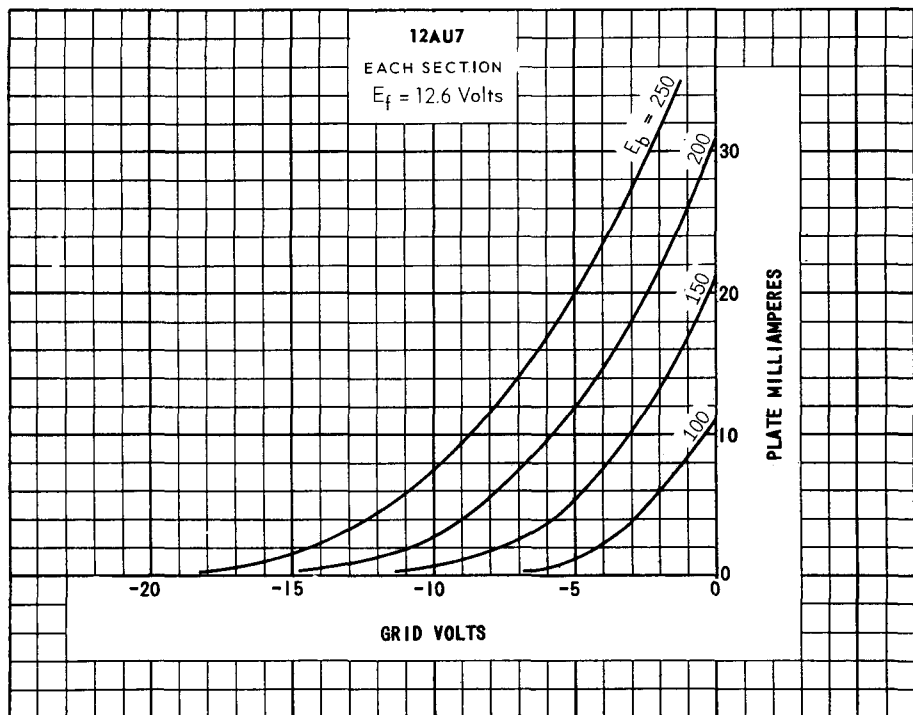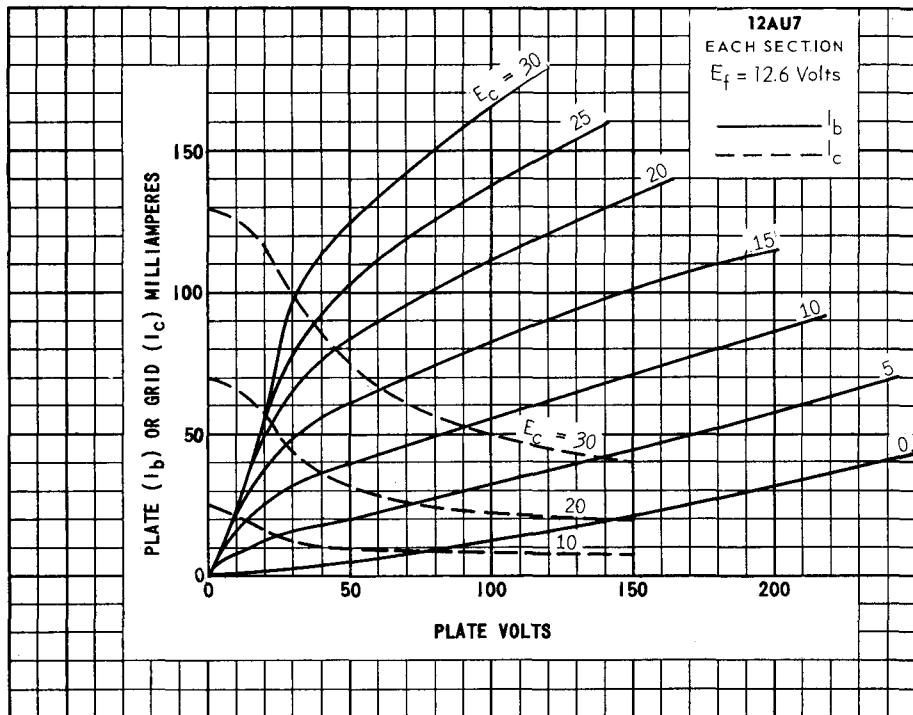

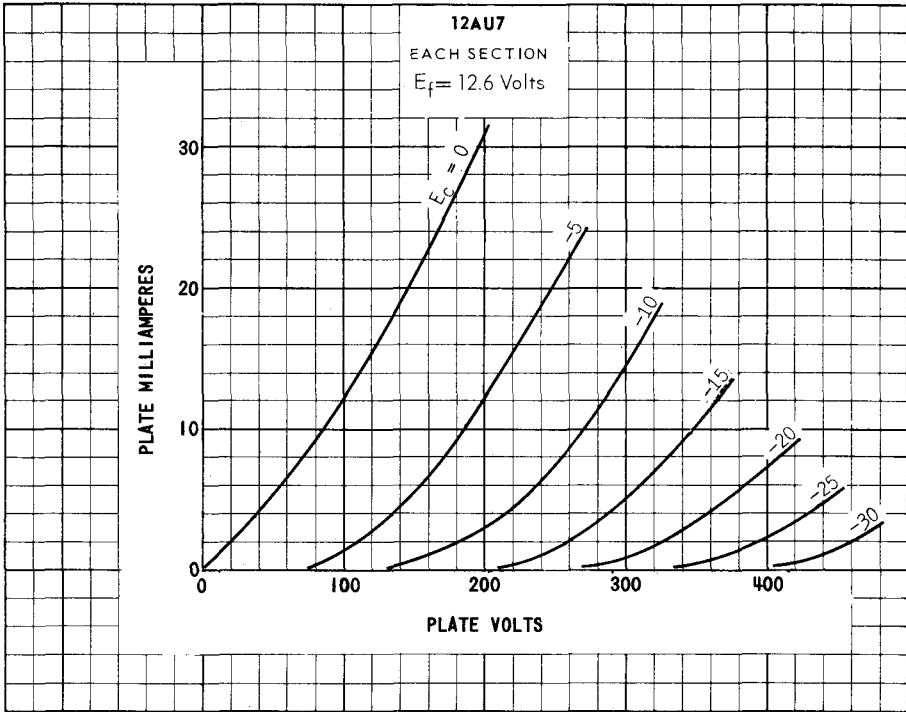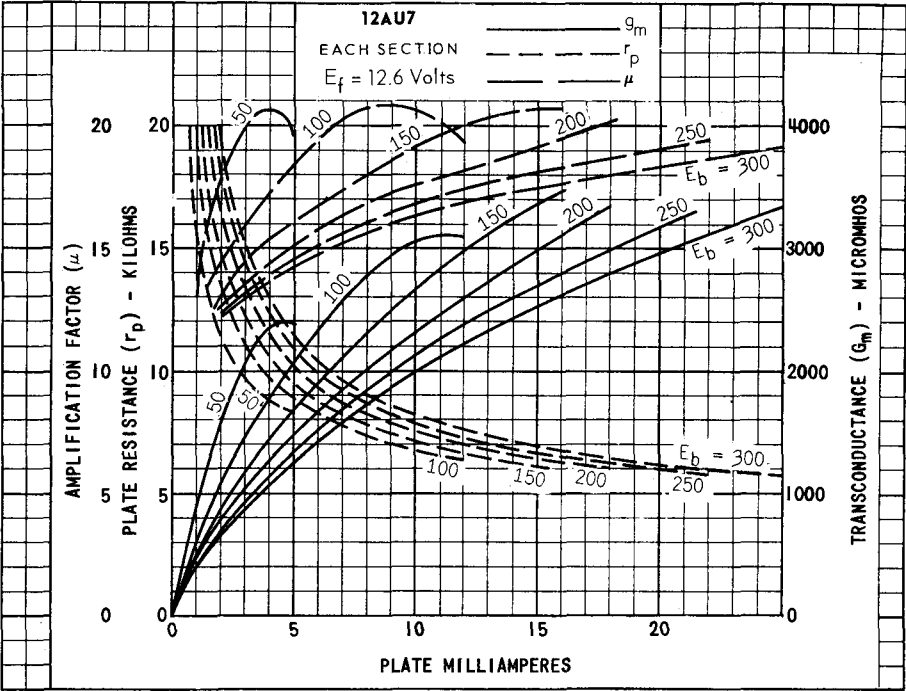


TUNG-SOL

RESISTANCE COUPLED AMPLIFIER EACH SECTION

R_p MEG.	R_s MEG.	R_{g1} MEG.	$E_{bb} = 90 \text{ VOLTS}$			$E_{bb} = 180 \text{ VOLTS}$			$E_{bb} = 300 \text{ VOLTS}$		
			R_k	GAIN	E_o	R_k	GAIN	E_o	R_k	GAIN	E_o
0.10	0.10	0.10	3300	14	13	2200	14	26	1800	14	40
0.10	0.24	0.10	3600	14	16	2700	15	33	2200	15	51
0.24	0.24	0.10	7500	14	16	5100	15	30	4300	15	44
0.24	0.51	0.10	9100	14	19	6800	15	39	5100	15	54
0.51	0.51	0.10	13000	14	16	9100	15	30	6800	16	40
0.51	1.0	0.10	15000	14	19	10000	16	32	7500	16	45
0.24	0.24	10	0	15	13	0	16	33	0	17	46
0.24	0.51	10	0	16	17	0	17	38	0	18	62
0.51	0.51	10	0	16	14	0	18	32	0	18	53
0.51	1.0	10	0	17	18	0	18	41	0	19	68

- NOTES: 1. E_o IS MAXIMUM RMS VOLTAGE OUTPUT FOR FIVE PERCENT (5%) TOTAL HARMONIC DISTORTION.
 2. GAIN MEASURED AT 2.0 VOLTS RMS OUTPUT.
 3. FOR ZERO-BIAS DATA, GENERATOR IMPEDANCE IS NEGLECTIBLE.

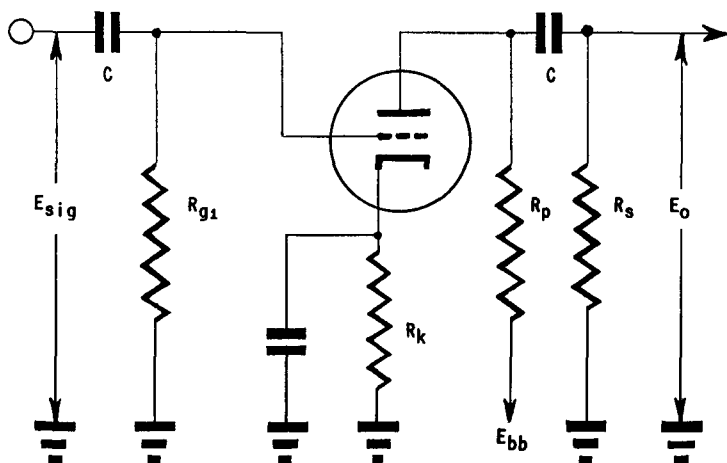

- NOTES: COUPLING CAPACITORS (C) SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE.
 R_k SHOULD BE ADEQUATELY BY-PASSED