

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic			
Deflecting Method	Electrostatic			
Phosphor*	P1	P2	P7	P11
Fluorescence	Green	Green	White	Blue
Phosphorescence	Green	Green	Yellow	—
Persistence	Medium	Medium	Long	Short
Faceplate	Gray Filter Glass			

*In addition to the screens shown, the 12AXP- can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 10 % Amperes
Direct Interelectrode Capacitances (Approx.)	
Cathode to All Other Electrodes	10 pf
Grid No. 1 to All Other Electrodes	8 pf
Between Deflecting Plates 1-2	4 pf
Between Deflecting Plates 3-4	2 pf
Deflecting Plate 1 to All Other Electrodes Except D2	8 pf
Deflecting Plate 2 to All Other Electrodes Except D1	8 pf
Deflecting Plate 3 to All Other Electrodes Except D4	6 pf
Deflecting Plate 4 to All Other Electrodes Except D3	6 pf

MECHANICAL DATA

Minimum Useful Screen Diameter	11 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Medium Shell Diheptal 12-Pin)	B12-37
Basing	14J
Weight (Approx.)	12 Pounds
J1-21 Contact Aligns with Trace D1-D2	±10 Degrees
J1-21 Contact Aligns with Pin No. 5	±10 Degrees
Positive Voltage on D1 Deflects Beam	
Approx. Toward Pin No. 5	
Positive Voltage on D3 Deflects Beam	
Approx. Toward Pin No. 1	
Bulb	C99½ Exp. 28, or Equivalent



RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Input ¹	6 Watts	
Anode No. 3 Voltage	12,000 Volts	dc
Anode No. 2 Voltage	6000 Volts	dc
Anode No. 1 Voltage	2500 Volts	dc
Grid No. 1 Voltage		
Negative Bias Value	200 Volts	dc
Positive Bias Value	0 Volt	dc
Positive Peak Value	2 Volts	
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode	200 Volts	
Heater Positive with Respect to Cathode	200 Volts	
Peak Voltage Between Anode No. 2 and Any Deflecting Plate	750 Volts	
Ratio (Post Accelerator Voltage to Anode Voltage)	2.3:1	

QUICK REFERENCE DATA

Oscilloscope Tube
12" Direct Viewed
Round Glass Type
Electrostatic Deflection
Electrostatic Focus
Post Deflection Acceleration

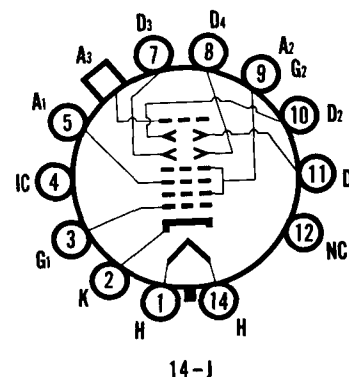

SYLVANIA ELECTRIC PRODUCTS INC.

Electronic Components Group
ELECTRONIC TUBE DIVISION
SENECA FALLS, NEW YORK

A Technical Publication

MARCH, 1965

PAGE 1 OF 2

File Under

SPECIAL AND GENERAL
PURPOSE CATHODE RAY TUBES

TYPICAL OPERATING CONDITIONS

Anode No. 3 Voltage	10,000 Volts	dc
Anode No. 2 Voltage	5000 Volts	dc
Anode No. 1 Voltage for Focus	1300 to 2200 Volts	dc
Grid No. 1 Voltage Required for Cutoff ²	-60 to -100 Volts	dc
Deflection Factors ³		
Deflecting Plates 1-2	105 to 145 Volts	dc/Inch
Deflecting Plates 3-4	80 to 115 Volts	dc/Inch
Modulation ⁴	30 Volts	Max.
Line Width "A" ⁴	.5 mm	
Focus Electrode Current ⁴	-15 to +10 μ a	dc
Spot Position, Undelected	Within 30 mm Square	
Angle Between D1-D2 Trace and D3-D4 Trace	90 $\pm$ 2 Degrees	
Useful Scan (Centered on Tube Face) ⁵	9 $\frac{3}{4}$ x 9 $\frac{3}{4}$ Inches	Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Resistance in Any Deflection Plate Circuit	5.0 Megohms Max.

NOTES:

1. Anode input equals the product of Anode No. 2 voltage and average anode No. 2 current.
2. For visual extinction of undeflected focused spot.
3. Deflection plates 1 and 2 are nearer the screen.
4. Measured in accordance with MIL-E-1 specification at a post accelerator current (IA_3) equal to 25 μ a.
5. At $EA_3 = EA_2$, the entire useful screen area can be scanned.

OUTLINE

