

TUNG-SOL

HEPTODE

MINIATURE TYPE



UNIPOTENTIAL CATHODE

HEATER

12.6 VOLTS 150 MA.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW
SMALL BUTTON
9 PIN BASE

THE 12BA7 IS A CATHODE TYPE HIGH GAIN PENTAGRID CONVERTER IN THE SMALL 9-PIN BUTTON CONSTRUCTION. IT IS DESIGNED FOR SERVICE AS A COMBINED LOCAL OSCILLATOR AND MIXER AT HIGH FREQUENCIES, ESPECIALLY IN THE FM BROADCAST BAND.

DIRECT INTERELECTRODE CAPACITANCES

WITH NO EXTERNAL SHIELD

GRID #3 TO PLATE: (G_3 TO P) MAX.	0.19	$\mu\mu f$
GRID #1 TO GRID #3: (G_1 TO G_3) MAX.	0.1	$\mu\mu f$
GRID #1 TO PLATE: (G_1 TO P) MAX.	0.05	$\mu\mu f$
GRID #1 TO CATHODE: (G_1 TO K)	3.3	$\mu\mu f$
GRID #1 TO ALL EXCEPT CATHODE: G_1 TO ($H+G_2+G_4+G_3+G_5+P+IS$)	3.4	$\mu\mu f$
CATHODE TO ALL EXCEPT GRID #1: K TO ($H+G_2+G_4+G_3+G_5+P+IS$)	4	$\mu\mu f$
RF INPUT: G_3 TO ($H+K+G_1+G_2+G_4+G_5+P+IS$)	9.5	$\mu\mu f$
OSCILLATOR INPUT: G_1 TO ($H+K+G_2+G_4+G_3+G_5+P+IS$)	6.7	$\mu\mu f$
MIXER OUTPUT: P TO ($H+K+G_1+G_2+G_4+G_3+G_5+IS$)	8.3	$\mu\mu f$

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD MB-210

HEATER VOLTAGE	12.6	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	300	VOLTS
MAXIMUM GRIDS #2 & #4 VOLTAGE	100	VOLTS
MAXIMUM GRIDS #2 & #4 SUPPLY VOLTAGE	300	VOLTS
MAXIMUM NEGATIVE GRID #3 VOLTAGE	100	VOLTS
MAXIMUM POSITIVE GRID #3 VOLTAGE	0	VOLTS
MAXIMUM GRID #5 & INTERNAL SHIELD VOLTAGE ^A	0	VOLTS
MAXIMUM PLATE DISSIPATION	2	WATTS
MAXIMUM GRIDS #2 & #4 DISSIPATION	1.5	WATTS
MAXIMUM CATHODE CURRENT	22	MA.

^A INTERNAL SHIELD (PINS #6 AND #8) CONNECTED DIRECTLY TO GROUND.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CONVERTER SERVICE - SEPARATE EXCITATION

THE CHARACTERISTICS SHOWN WITH SEPARATE EXCITATION
CORRESPOND VERY CLOSELY WITH THOSE OBTAINED IN A
SELF-EXCITED OSCILLATOR CIRCUIT OPERATING WITH ZERO
BIAS.


HEATER VOLTAGE	12.6	12.6	VOLTS
HEATER CURRENT	150	150	MA.
PLATE VOLTAGE	100	250	VOLTS
GRIDS #2 & #4 VOLTAGE	100	100	VOLTS
GRID #3 VOLTAGE	-1	-1	VOLTS
GRID #5 AND INTERNAL SHIELD ^A	CONNECTED DIRECTLY TO GROUND		
GRID #1 RESISTOR	20 000	20 000	OHMS
PLATE RESISTANCE (APPROX.)	0.5	1	MEGOHM
CONVERSION TRANSCONDUCTANCE	900	950	μMHOS
PLATE CURRENT	3.6	3.8	MA.
GRIDS #2 & #4 CURRENT	10.2	10	MA.
GRID #1 CURRENT	0.35	0.35	MA.
TOTAL CATHODE CURRENT	14.2	14.2	MA.
CONVERSION TRANSCONDUCTANCE WITH $E_{c3} = -20$ VOLTS	3.5	3.5	μMHOS


^A INTERNAL SHIELD (PINS #6 AND #8) CONNECTED DIRECTLY TO GROUND.


OSCILLATOR TRANSCONDUCTANCE
NOT OSCILLATING

GRID #3 VOLTAGE	0	VOLTS
GRID #1 VOLTAGE	0	VOLTS
GRIDS #2 & #4 CONNECTED TO PLATE	100	VOLTS
PLATE CURRENT	32	MA.
TRANSCONDUCTANCE BETWEEN GRID #1 & GRIDS #2 & #4 CONNECTED TO PLATE	8 000	μMHOS
AMPLIFICATION FACTOR	16.5	

SIMILAR TYPE REFERENCE: Except for heater ratings similar to 6SB7Y.

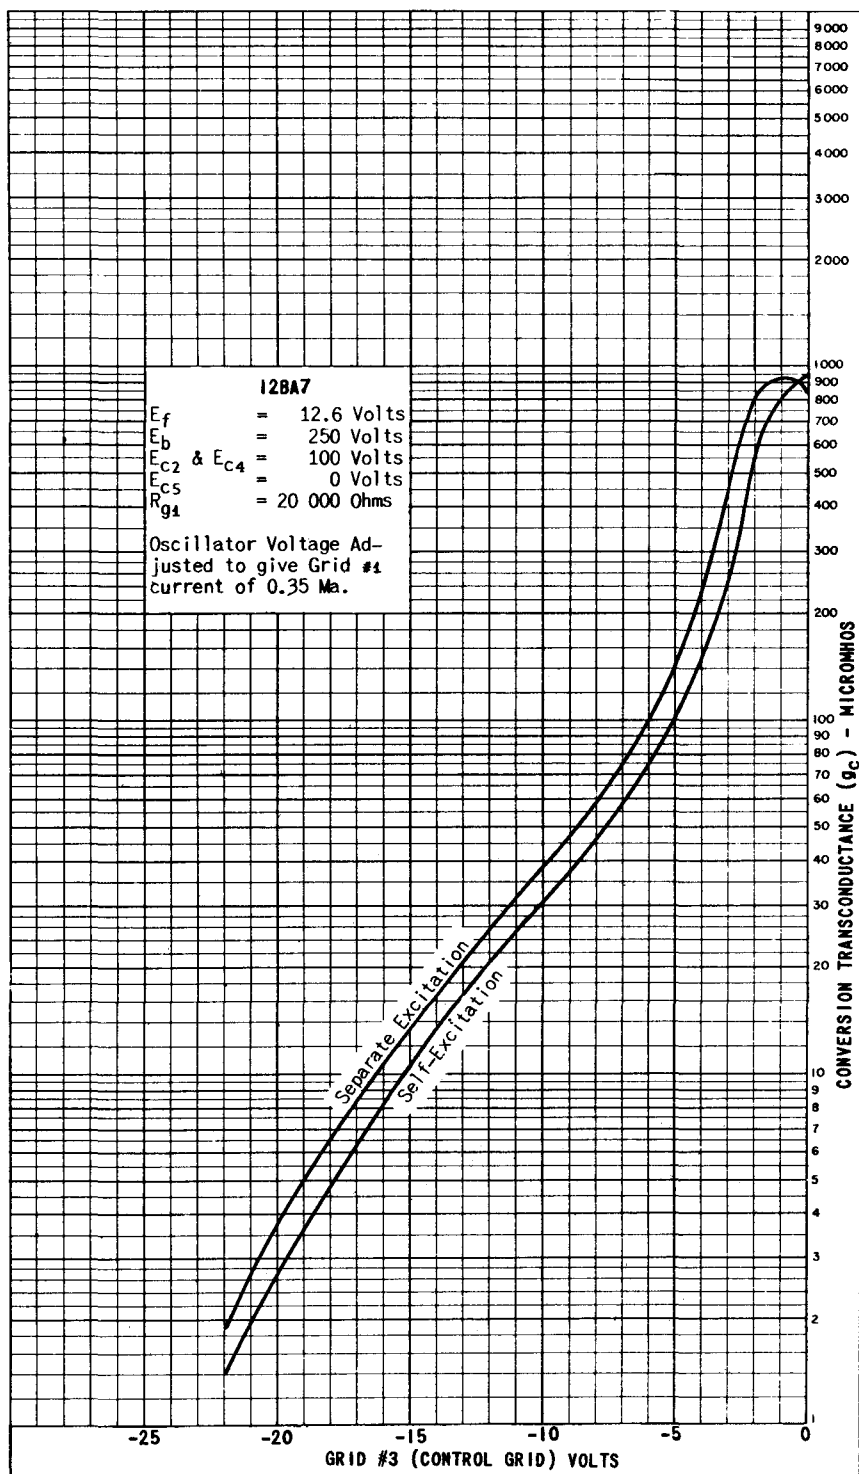

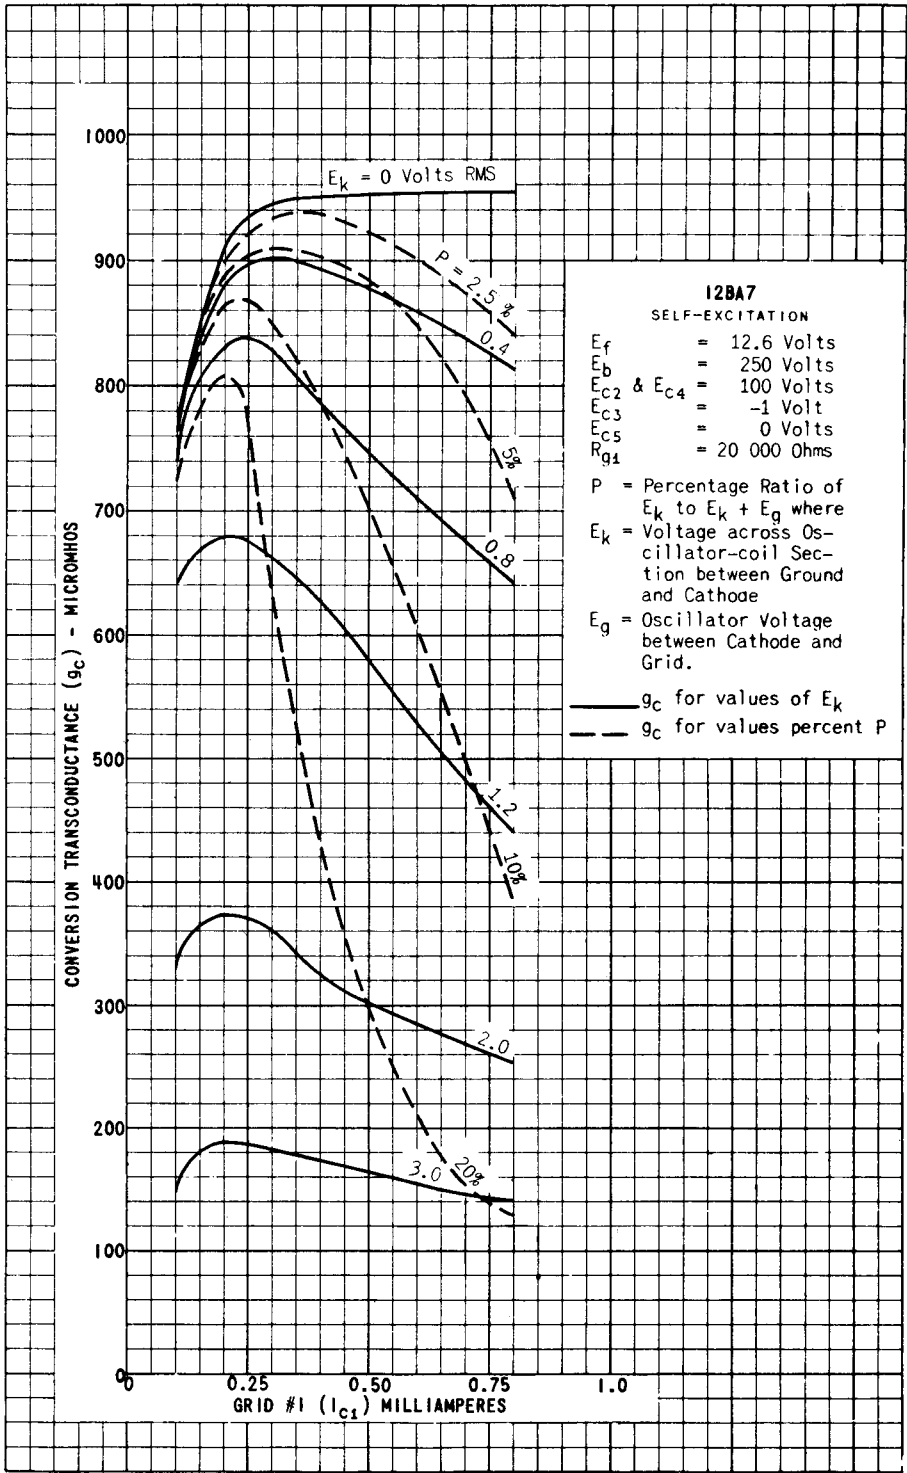

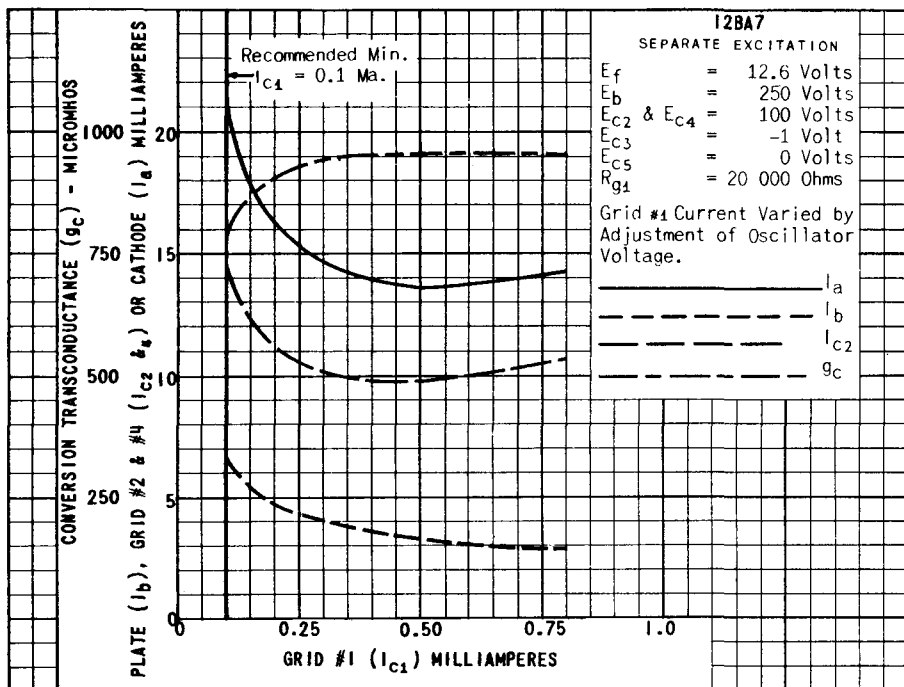

PRINTED IN U. S. A.

PLATE
2090
OCT. 1,
1948