
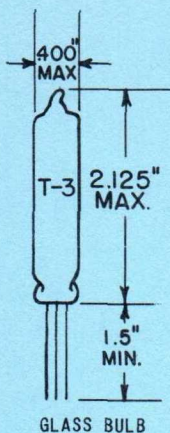


TUNG-SOL

VOLTAGE REGULATOR
SUB-MINIATURE TYPE

COLD CATHODE

ANY MOUNTING POSITION



BOTTOM VIEW

0.016" TINNED
FLEXIBLE LEADS
0.096" CENTER TO CENTER

THE 6542 IS A TWO ELECTRODE, INERT-GAS-FILLED COLD CATHODE SUBMINIATURE TUBE INTENDED FOR USE AS A VOLTAGE REGULATOR. THE TUBE HAS A MAINTAINING VOLTAGE OF APPROXIMATELY 150 VOLTS OVER A CURRENT RANGE OF 5 TO 25 MA. THE 6542 IS EXCELLENT FOR APPLICATIONS WHICH REQUIRE GOOD VOLTAGE REGULATION AND LONG LIFE, CONSISTENT WITH SMALL SIZE AND LOW WEIGHT.

ELECTRICAL DATA

CATHODE

COLD

MECHANICAL DATA

MOUNTING POSITION
MAXIMUM OVERALL LENGTH
MAXIMUM DIAMETER
WEIGHT (APPROX.)
BULB
BASE

ANY
2.125 INCHES
0.400 INCHES
0.16 OUNCES
T-3

SUB-MINIATURE FLAT PRESS
WITH 3 FLYING LEADS

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS
ABSOLUTE VALUES

MAXIMUM DC CATHODE CURRENT	25	MA.
MINIMUM DC CATHODE CURRENT	5	MA.
MAXIMUM BULB TEMPERATURE	155	°C
MINIMUM AMBIENT TEMPERATURE	-55	°C
MAXIMUM ALTITUDE	60 000	FEET

CIRCUIT VALUES

MAXIMUM SHUNT CAPACITOR	0.1	μ f
SERIES RESISTOR	SEE OPERATION NOTES	

EQUIPMENT DESIGN AND RANGE VALUES

	MIN.	AVG.	MAX.	
DC ANODE SUPPLY VOLTAGE	185*	---	---	VOLTS
ANODE BREAKDOWN VOLTAGE	---	150	180	VOLTS
TUBE VOLTAGE DROP	140	147	168	VOLTS
REGULATION (5 TO 30 MA.)	---	0.8	6	VOLTS

* IN ORDER TO ASSURE STARTING THROUGH TUBE LIFE NOT LESS THAN THE SPECIFIED SUPPLY VOLTAGE SHOULD BE PROVIDED.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

OPERATING NOTES

IN THE OPERATION OF A GLOW TUBE THERE ARE SEVERAL REQUIREMENTS WHICH MUST ALWAYS BE MET. THE FIRST IS THAT THE SUPPLY VOLTAGE MUST ALWAYS BE GREATER THAN THE ANODE BREAKDOWN VOLTAGE AND THE SECOND IS THAT SUFFICIENT RESISTANCE MUST ALWAYS BE PUT IN SERIES WITH THE TUBE IN ORDER TO LIMIT THE CURRENT TO THE MINIMUM AND MAXIMUM VALUES GIVEN IN THE RATINGS.

IN ORDER TO ILLUSTRATE HOW TO CALCULATE THE VALUE OF THE SERIES RESISTANCE A TYPICAL REGULATOR CIRCUIT IS SHOWN IN FIGURE 1.

FROM FIGURE 1 WE SEE THAT V_1 IS THE UNREGULATED SUPPLY VOLTAGE, V_2 IS THE TUBE VOLTAGE DROP ON THE REGULATED VOLTAGE SUPPLIED TO THE LOAD, R_1 IS THE SERIES LIMITING RESISTOR, R_L IS THE VARIABLE LOAD, I_T IS THE TUBE CURRENT AND I_L IS THE LOAD CURRENT.

WE SEE THAT THE TUBE CURRENT WILL BE A MAXIMUM WHEN THE SUPPLY VOLTAGE IS A MAXIMUM (V_1 MAX.); WHEN THE LOAD CURRENT IS A MINIMUM (I_L MIN.); AND WHEN THE TUBE VOLTAGE DROP IS A MINIMUM (V_2 MIN.). THEREFORE THE CONDITIONS WHICH DETERMINE THE LOWER LIMIT FOR THE SERIES RESISTANCE R_1 ARE THAT

$$R_1 > \frac{V_1 \text{ MAX.} - V_2 \text{ MIN.}}{I_T \text{ MAX.} + I_L \text{ MIN.}}$$

IN A LIKE MANNER IT CAN BE SHOWN THAT THE VALUE OF R_1 IN ORDER TO LIMIT THE CURRENT TO THE MINIMUM VALUE REQUIRES THAT

$$R_1 < \frac{V_1 \text{ MIN.} - V_2 \text{ MAX.}}{I_T \text{ MIN.} + I_L \text{ MAX.}}$$

WHEN THESE VALUES HAVE BEEN COMPUTED, ONE SHOULD CHECK TO SEE IF THERE IS SUFFICIENT STARTING VOLTAGE BY THE FOLLOWING RELATION

$$V_1 \text{ MIN.} \cdot \frac{R_L}{R_1 + R_L} < V \text{ STARTING}$$


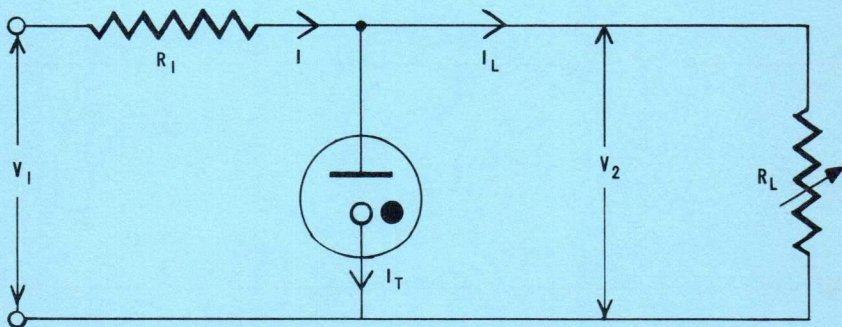



FIGURE 1

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

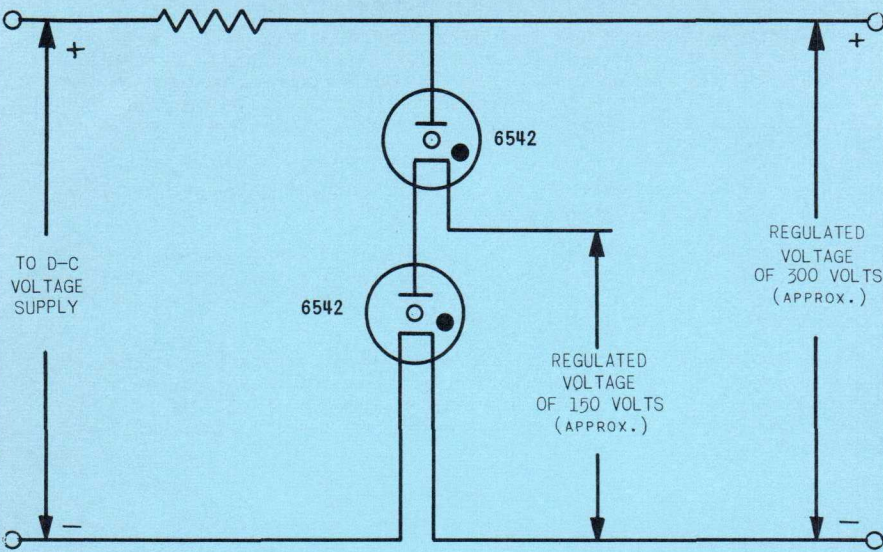

OPERATION OF REGULATOR TUBES IN SERIES
FIGURE 2

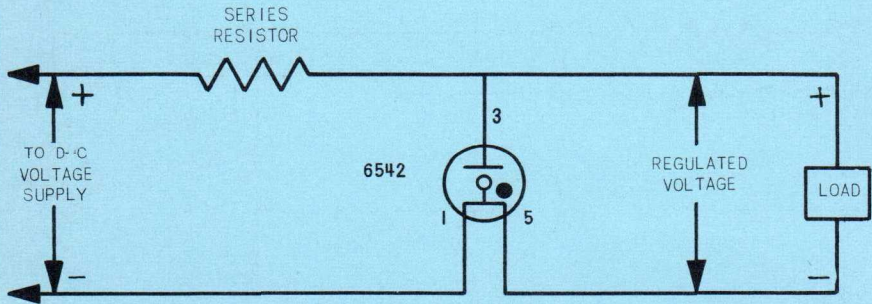

TYPICAL CIRCUIT FOR VOLTAGE REGULATOR
FIGURE 3

