


TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A_1 AMPLIFIER

PLATE VOLTAGE	250	VOLTS
GRID #2 VOLTAGE	180	VOLTS
CATHODE RESISTOR	100	OHMS
PLATE CURRENT	26	MA.
GRID #2 CURRENT	5.7	MA.
PLATE RESISTANCE	93 000	OHMS
TRANSCONDUCTANCE	11 000	μ MHOS
AMPLIFICATION FACTOR	1 035	
GRID #1 VOLTAGE FOR $I_b \approx 20 \mu A$.	11.6	VOLTS
TRIODE AMPLIFICATION FACTOR	28.5	

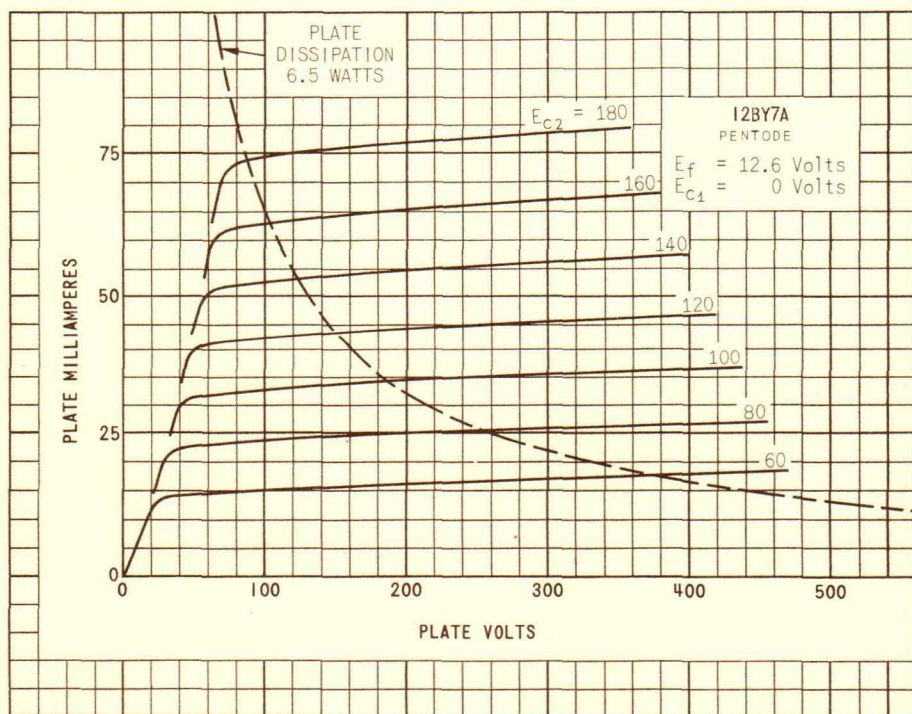

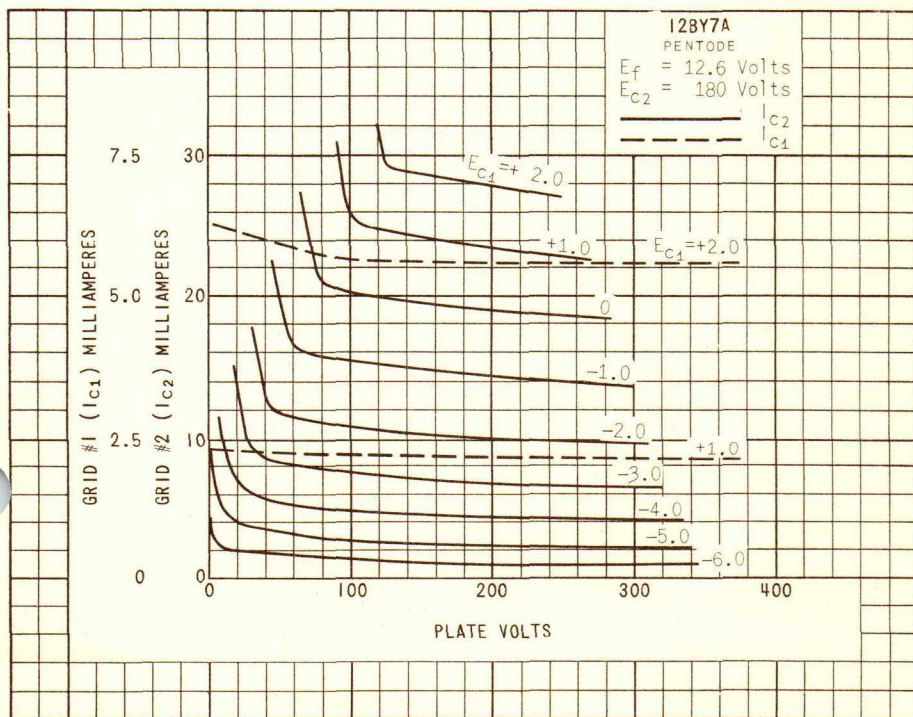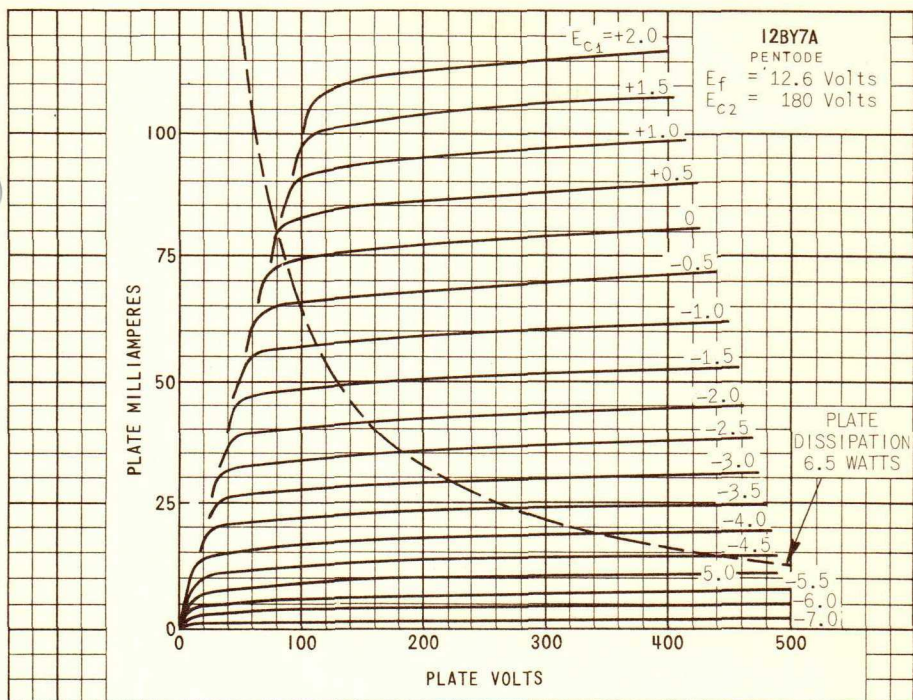

12BY7A

