

TUNG-SOL

DOUBLE-DIODE TRIODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

HEATER


6.3 VOLTS 300 MA.

AC OR DC

ANY MOUNTING POSITION



GLASS BULB


 BOTTOM VIEW
 MINIATURE BUTTON
 7 PIN BASE

THE 6AV6 COMBINES A HIGH-MU TRIODE AND TWO INDEPENDENT DIODE UNITS IN THE 7-PIN MINIATURE CONSTRUCTION. IT PERMITS A SINGLE TUBE TO FUNCTION AS DETECTOR, AVC RECTIFIER, AND AUDIO AMPLIFIER. COUPLING BETWEEN THE DIODE AND TRIODE SECTIONS IS MINIMIZED BY THE USE OF INTERNAL SHIELDING.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-210

FILAMENT VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	300	VOLTS
MAXIMUM DIODE CURRENT EACH PLATE FOR CONTINUOUS OPERATION	1.0	MA.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

TRIODE UNIT - CLASS A₁ AMPLIFIER

FILAMENT VOLTAGE	6.3	6.3	VOLTS
FILAMENT CURRENT	300	300	MA.
PLATE VOLTAGE	100	250	VOLTS
GRID VOLTAGE	-1	-2	VOLTS
PLATE CURRENT	0.5	1.2	MA.
PLATE RESISTANCE	80 000	62 500	OHMS
TRANSCONDUCTANCE	1 250	1 600	μMHOS
AMPLIFICATION FACTOR	100	100	

DIODE UNITS - TWO

THE DIODE UNITS ARE INDEPENDENT OF THE TRIODE UNIT EXCEPT FOR THE COMMON CATHODE SLEEVE.

DIODE BIASING OF THE TRIODE UNIT IS NOT SUITABLE.

SIMILAR TYPE REPPRRNROR: Ratings and characteristics somewhat similar to 6AV6 except for the use of more thorough shielding of the diode units from the triode.

CONTINUED ON FOLLOWING PAGE

CONTINUED FROM PRECEDING PAGE

RESISTANCE COUPLED AMPLIFIER

R_L MEG.	R_C MEG.	$E_{bb} = 90$ VOLTS			$E_{bb} = 180$ VOLTS			$E_{bb} = 300$ VOLTS		
		R_k	GAIN	E_o	R_k	GAIN	E_o	R_k	GAIN	E_o
0.1	0.22	4700	35 ^A	4	2000	47	18	1500	52	40
0.22	0.47	7400	45 ^B	6	3500	59	24	2800	65	49
0.47	1.0	13000	52 ^C	8	6700	66	28	5200	73	54


E_o IS RMS OUTPUT AT GRID CURRENT POINT.

GAIN MEASURED AT 5.0 VOLTS RMS OUTPUT EXCEPT AS INDICATED.



^A OUTPUT VOLTAGE OF 2 VOLTS RMS.

^B OUTPUT VOLTAGE OF 3 VOLTS RMS.

^C OUTPUT VOLTAGE OF 4 VOLTS RMS.

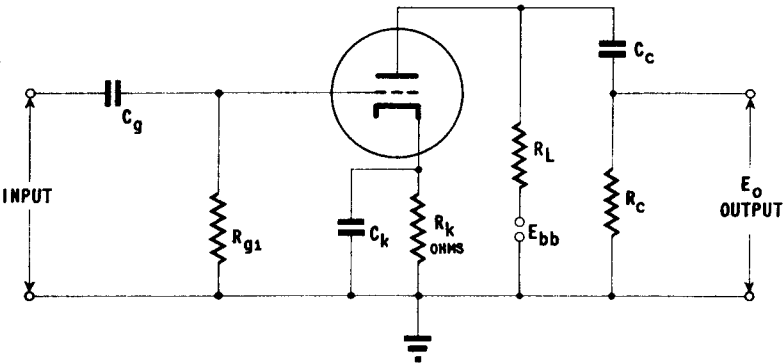

NOTE: COUPLING CAPACITORS C_g AND C_c SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE. R_k SHOULD BE ADEQUATELY BY-PASSED BY CAPACITOR C_k .

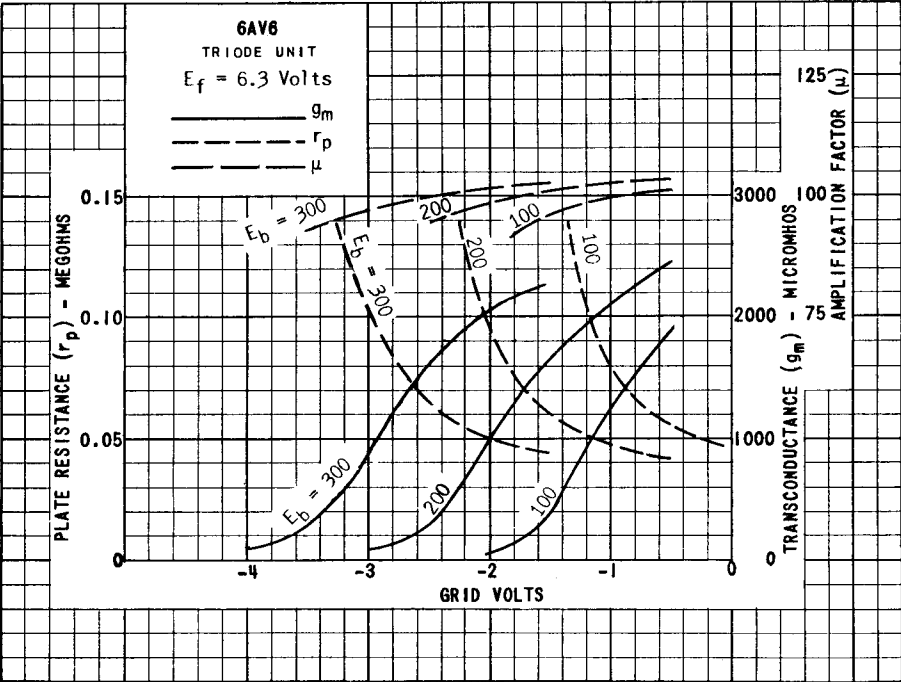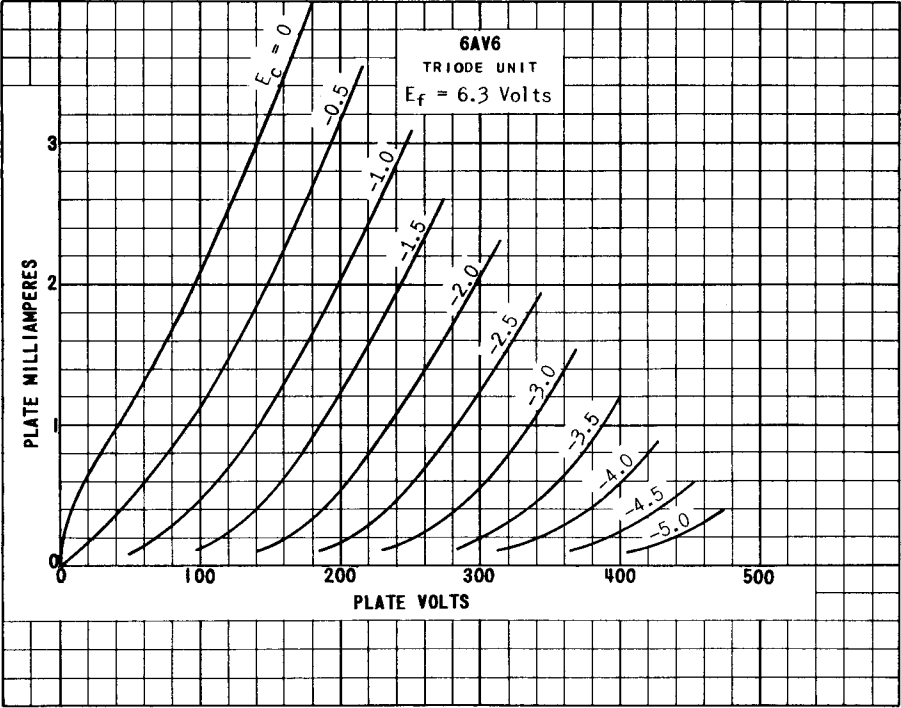

PRINTED IN U. S. A.

PLATE 1961
FEB. 2,
1948

6AV6


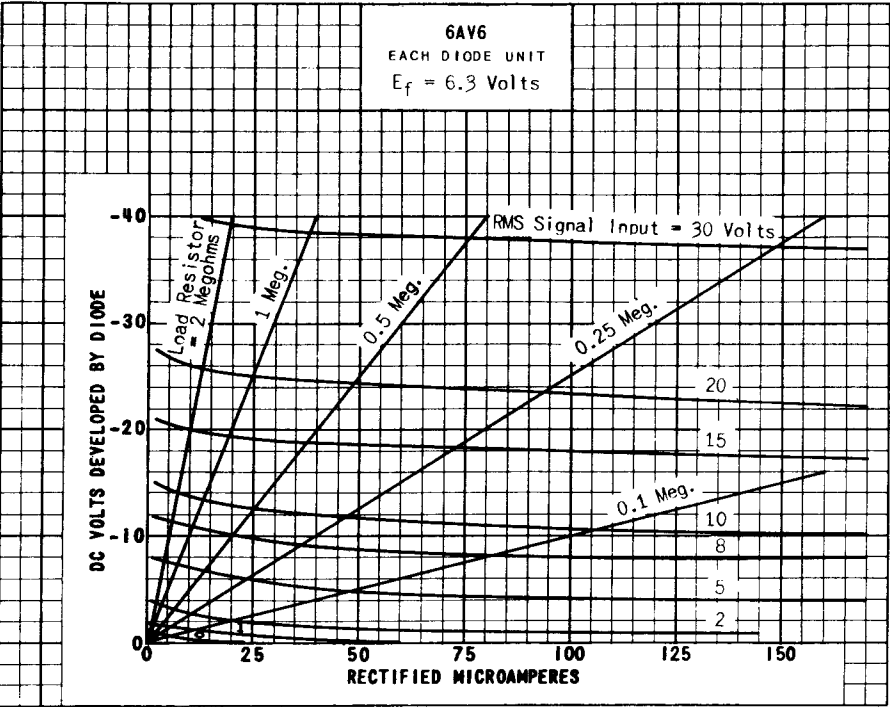


PLATE
1962
FEB. 2,
1948

TUNG-SOL

DOUBLE-DIODE TRIODE

MINIATURE TYPE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3±10 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION


 BOTTOM VIEW
 MINIATURE BUTTON
 7 PIN BASE

78T

THE 6AV6 COMBINES A HIGH-MU TRIODE AND TWO INDEPENDENT DIODE UNITS IN THE 7 PIN MINIATURE CONSTRUCTION. IT PERMITS A SINGLE TUBE TO FUNCTION AS DETECTOR, AVC RECTIFIER, AND AUDIO AMPLIFIER. COUPLING BETWEEN THE DIODE AND TRIODE SECTIONS IS MINIMIZED BY THE USE OF INTERNAL SHIELDING.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
GRID TO PLATE: (G TO P)	2	2	μf
INPUT: G TO (H+K)	2.2	2.2	μf
OUTPUT: P TO (H+K)	1.2	0.8	μf
COUPLING: #2 DIODE PLATE TO GRID (MAX.)	0.04	0.04	μf

^AEXTERNAL SHIELD #316 CONNECTED TO PIN #2.

RATINGS ←

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM

HEATER VOLTAGE	6.3±10%	VOLTS
MAXIMUM PLATE VOLTAGE	330	VOLTS
MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	200	VOLTS
DC COMPONENT	100	VOLTS
MAXIMUM PLATE DISSIPATION	0.55	WATT
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM DIODE CURRENT EACH UNIT FOR CONTINUOUS OPERATION	1	MA.

→ INDICATES A CHANGE.

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER


PLATE VOLTAGE	100	250	VOLTS
GRID #1 VOLTAGE	-1	-2	VOLTS
PLATE RESISTANCE	80 000	62 500	OHMS
AMPLIFICATION FACTOR	100	100	
TRANSCONDUCTANCE	1 250	1 600	μMHOS
PLATE CURRENT	0.5	1.2	MA.
AVERAGE DIODE CURRENT AT 10 VOLTS DC (EACH UNIT)	2.0	2.0	MA.

RESISTANCE COUPLED AMPLIFIER

TRIODE UNIT

PLATE SUPPLY VOLTAGE	90	250	VOLTS
CONTROL GRID VOLTAGE	0	0	VOLTS
PLATE LOAD RESISTOR	220 000	470 000	OHMS
CONTROL GRID RESISTOR	10.0	10.0	MEG OHMS
INPUT CONDENSER	0.01	0.01	μf
OUTPUT CONDENSER	0.01	0.01	μf
GRID RESISTOR OF FOLLOWING STAGE	470 000	470 000	OHMS
SIGNAL SOURCE IMPEDANCE (MAX.)	1 000	1 000	OHMS
DISTORTION	5	5	PERCENT
OUTPUT VOLTAGE	5.5	30	VOLTS
VOLTAGE GAIN AT 400 CPS	42	63	

→ INDICATES A CHANGE OR ADDITION.

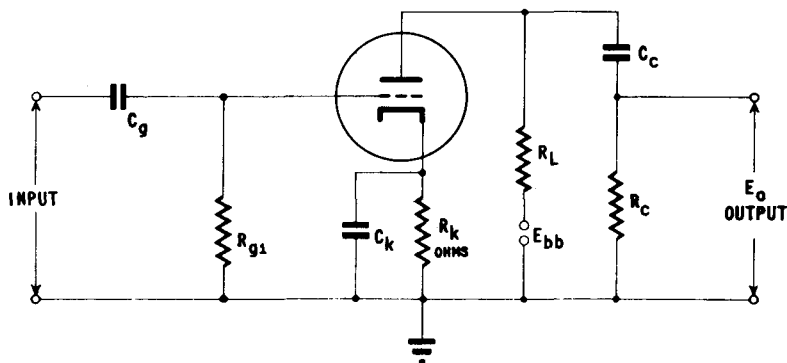

NOTE: COUPLING CAPACITORS C_g AND C_c SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE. R_k SHOULD BE ADEQUATELY BY-PASSED BY CAPACITOR C_k .