


TUNG-SOL

PENTODE
MINIATURE TYPE

GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 1.2 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

MINIATURE BUTTON
9 PIN BASE

98Q

THE 6BK5 IS A BEAM POWER AMPLIFIER UTILIZING THE 9 PIN MINIATURE CONSTRUCTION. IT IS DESIGNED PRIMARILY FOR USE IN THE POWER OUTPUT STAGE OF TELEVISION AND RADIO RECEIVERS. IN WHICH ONLY SMALL DRIVING VOLTAGES ARE AVAILABLE. IT CAN ALSO BE USED AS A VIDEO AMPLIFIER IN TELEVISION RECEIVERS.

DIRECT INTERELECTRODE CAPACITANCES

WITH NO EXTERNAL SHIELD

GRID #1 TO PLATE: G_1 TO P	0.06	μf
INPUT: G_1 TO (H+K+ G_2 + G_3)	13	μf
OUTPUT: P TO (H+K+ G_2 + G_3)	5	μf

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER CATHODE VOLTAGE: ←		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
TOTAL DC AND PEAK	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	100	VOLTS
DC	200	VOLTS
TOTAL DC AND PEAK	250	VOLTS
MAXIMUM PLATE VOLTAGE	250	VOLTS
MAXIMUM GRID #2 VOLTAGE	250	VOLTS
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM PLATE DISSIPATION	9	WATTS
MAXIMUM GRID #2 DISSIPATION	2.5	WATTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE:		
FIXED BIAS OPERATION	0.1	MEGOHM
CATHODE BIAS OPERATION	0.5	MEGOHM

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE


TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A_1 AMPLIFIER

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	1.2	AMP.
PLATE VOLTAGE	250	VOLTS
GRID #2 VOLTAGE	250	VOLTS
GRID #1 VOLTAGE	-5	VOLTS
PEAK AF GRID #1 VOLTAGE	5	VOLTS
PLATE RESISTANCE (APPROX.)	100 000	OHMS
TRANSCONDUCTANCE	8 500	μ MHOS
ZERO-SIGNAL PLATE CURRENT	35	MA.
MAXIMUM SIGNAL PLATE CURRENT (APPROX.)	37	MA.
ZERO-SIGNAL GRID #2 CURRENT	3.5	MA.
MAXIMUM SIGNAL GRID #2 CURRENT (APPROX.)	10	MA.
LOAD RESISTANCE	6 500	OHMS
TOTAL HARMONIC DISTORTION (APPROX.)	7	PERCENT
POWER OUTPUT	3.5	WATTS

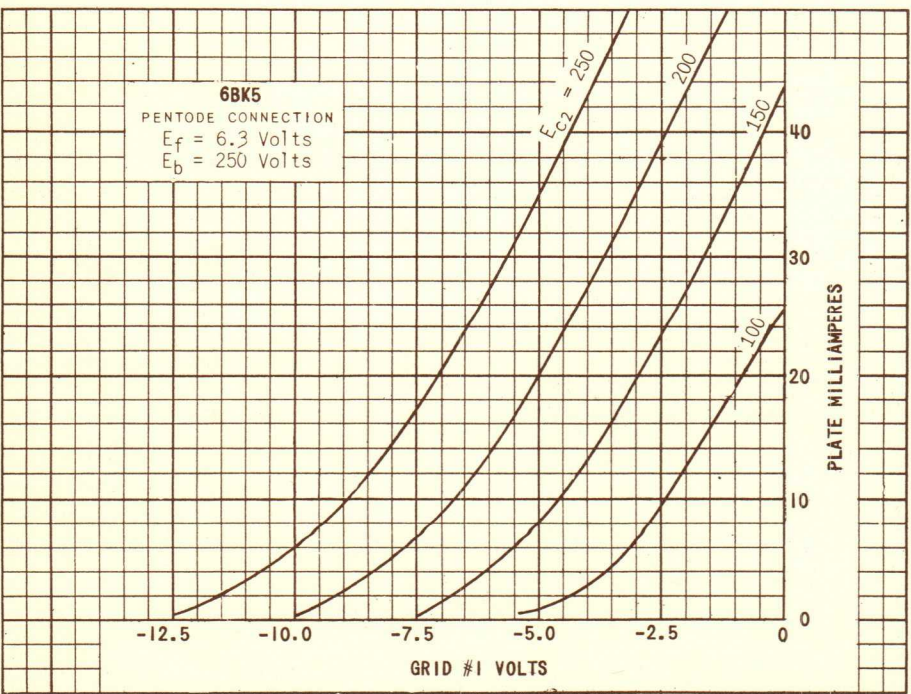

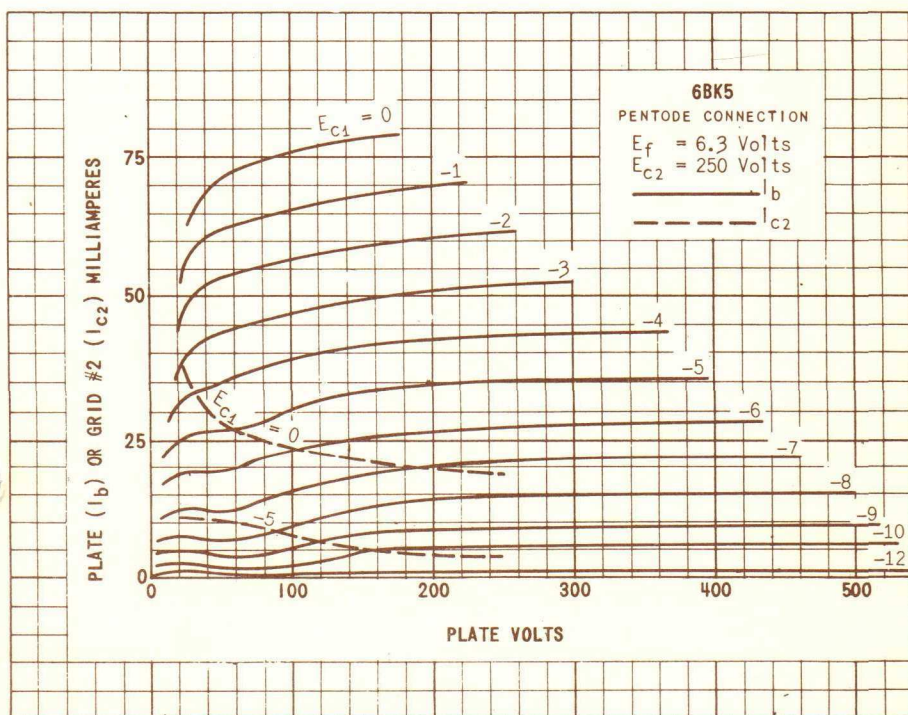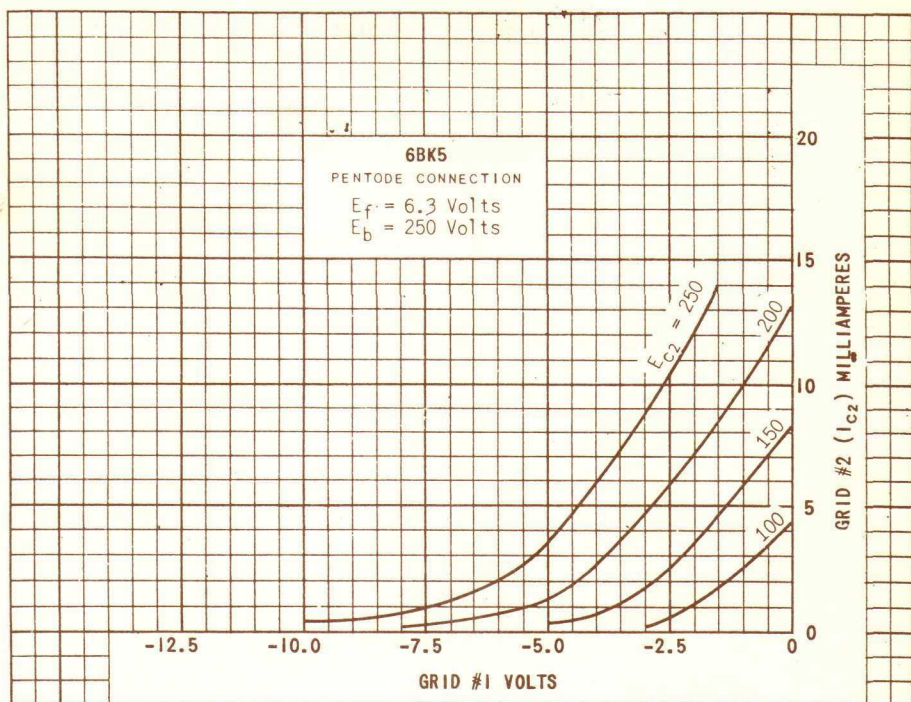

6BK5 (25BK5)

