

Sharp-Cutoff Pentode

12GN7-A

FOR TV VIDEO AMPLIFIER APPLICATIONS

The 12GN7-A is a miniature, sharp-cutoff pentode designed primarily for video amplifier service in television receivers.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential				
Heater Characteristics and Ratings				
Heater Voltage, AC or DC	6.3	6.3±0.6#	12.6±1.3#	Volts
Heater Current	0.6±0.04#	0.6Δ	0.3¢	Amperes
Heater Warm-up Time, average**	11	---	---	Seconds
Direct Interelectrode Capacitances##				
Grid-Number 1 to Plate: (g1 to p)			0.12	pf
Input: g1 to (h + k + g2 + g3 + i.s.).			17.5	pf
Output: p to (h + k + g2 + g3 + i.s.).			4.0	pf

MECHANICAL


Operating Position - Any				
Envelope - T-6 1/2, Glass				
Base - E9-1, Small Button 9-Pin				
Outline Drawing - EIA 6-3				
Maximum Diameter.			0.875	Inches
Maximum Over-all Length			2.625	Inches
Maximum Seated Height			2.375	Inches

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

Plate Voltage.	400	Volts
Screen Supply Voltage	330	Volts
Screen Voltage - See Screen Rating Chart		
Positive DC Grid-Number 1 Voltage	0	Volts
Plate Dissipation	11.5	Watts
Screen Dissipation	1.5	Watts
Grid-Number 1 Circuit Resistance	0.25	Megohms

PHYSICAL DIMENSIONS

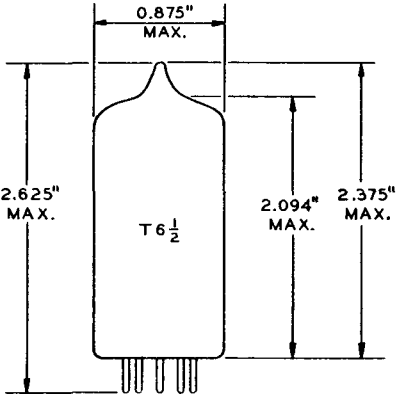


EIA 6-3

TERMINAL CONNECTIONS

- Pin 1 - Cathode
- Pin 2 - Grid Number 1
- Pin 3 - Grid Number 3 (Suppressor) and Internal Shield
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Heater Center Tap
- Pin 7 - Plate
- Pin 8 - Grid Number 2 (Screen)
- Pin 9 - Grid Number 3 (Suppressor) and Internal Shield

BASING DIAGRAM



EIA 9BF

MAXIMUM RATINGS (Cont'd)

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.


CHARACTERISTICS AND TYPICAL OPERATION**AVERAGE CHARACTERISTICS**

Plate Voltage.	50	250	Volts
Screen Voltage	125	150	Volts
Grid-Number 1 Voltage	0.04	0	Volts
Cathode-Bias Resistor	---	56	Ohms
Plate Resistance, approximate	---	50000	Ohms
Transconductance.	---	36000	Micromhos
Plate Current.	70	28	Milliamperes
Screen Current	24	6.5	Milliamperes
Grid-Number 1 Voltage, approximate			
Ib = 100 Microamperes	---	-5.7	Volts


NOTES

- * Operated with the two sections of the heater connected in parallel and the resulting combination in series with the heaters of other tubes having the same bogey heater current.
- † Operated with the two sections of the heater connected in parallel and the resulting combination in parallel with the heaters of other tubes having the same bogey heater voltage.
- § Operated with the two sections of the heater connected in series and the resulting combination in parallel with the heaters of other tubes having the same bogey heater voltage.
- ¶ Heater voltage for a bogey tube at If = 0.6 amperes.
- # For parallel heater operation, the equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance; for series heater operation, the equipment designer should design the equipment so that heater current is centered at the specified bogey value, with heater supply variations restricted to maintain heater current within the specified tolerance.
- Δ Heater current of a bogey tube at Ef = 6.3 volts.
- ∠ Heater current of a bogey tube at Ef = 12.6 volts.
- ** The time required for the voltage across the heater to reach 80 percent of the bogey value after applying 4 times the bogey heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the bogey heater voltage divided by the bogey heater current.
- †† Without external shield.
- §§ Control grid to cathode spacing of this type is of such low order of magnitude as to preclude the use of voltage between these elements of more than 50 volts dc or peak ac in commercial tube checkers or shorts-indicating devices, particularly where mechanical excitation of the tube is employed.
- ¶¶ Applied for a short interval (two seconds maximum) so as not to damage tube.


SCREEN RATING CHART

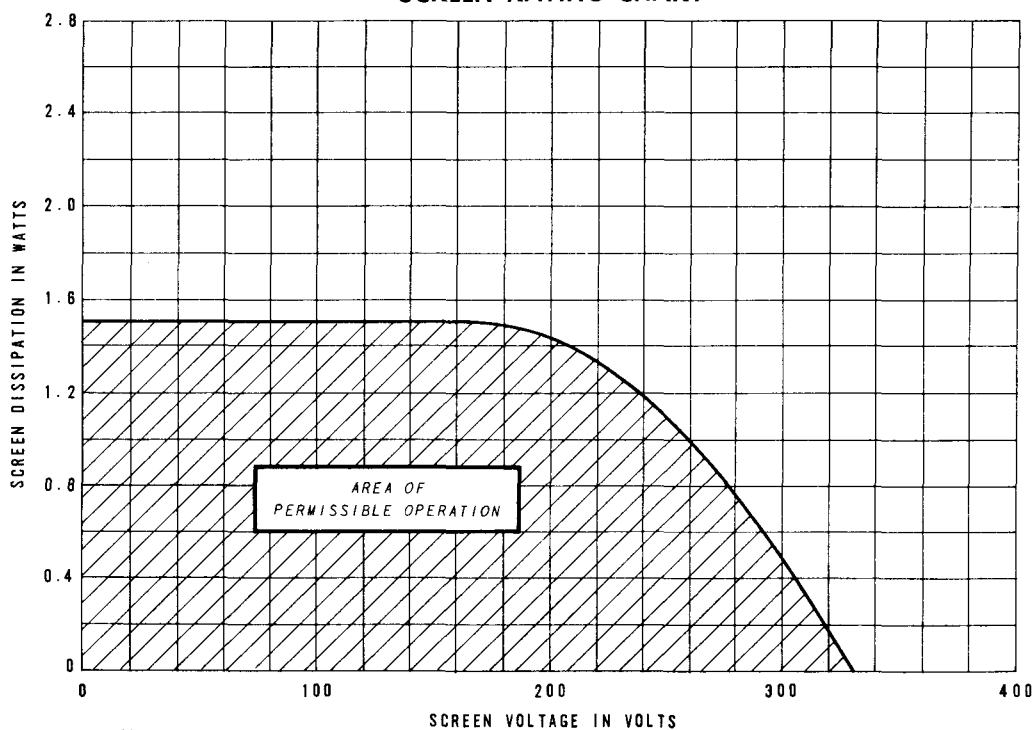

AVERAGE PLATE CHARACTERISTICS

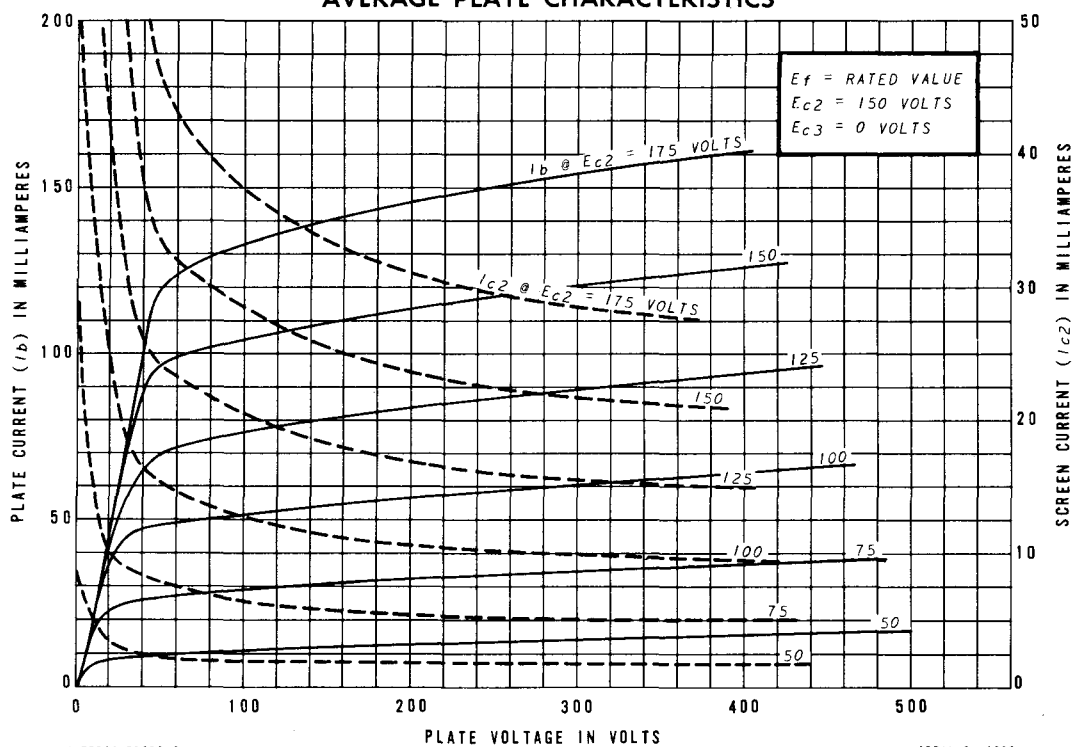


AVERAGE PLATE CHARACTERISTICS

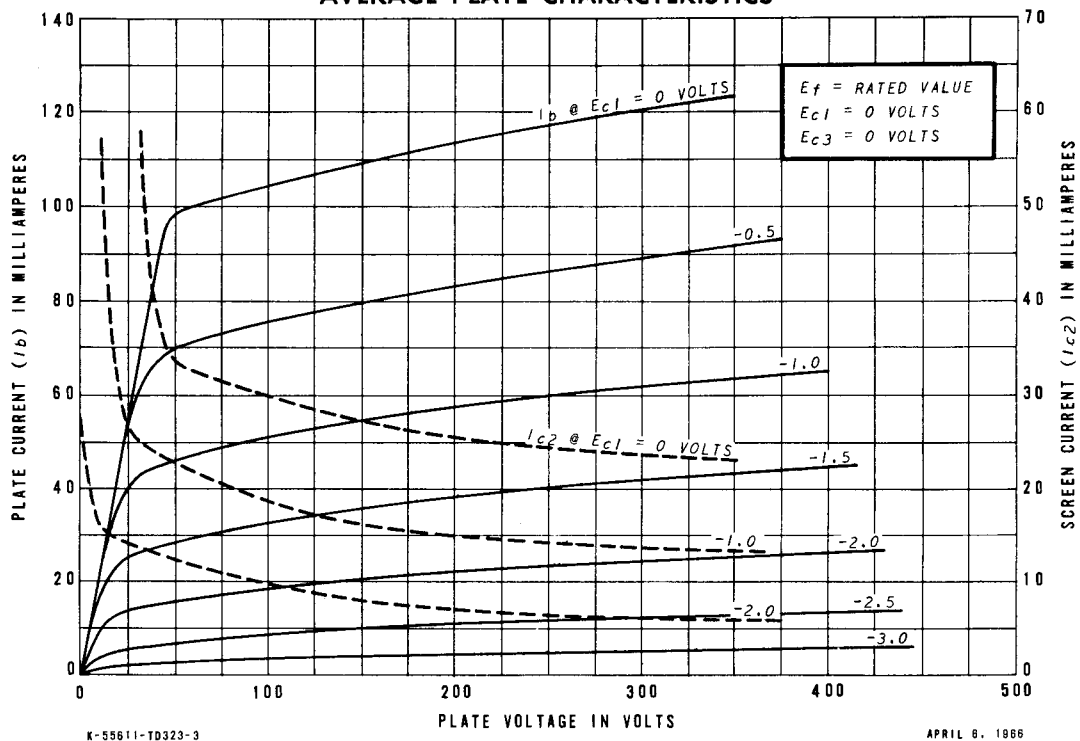

K-55611-TD323-3

APRIL 6, 1966


AVERAGE TRANSFER CHARACTERISTICS

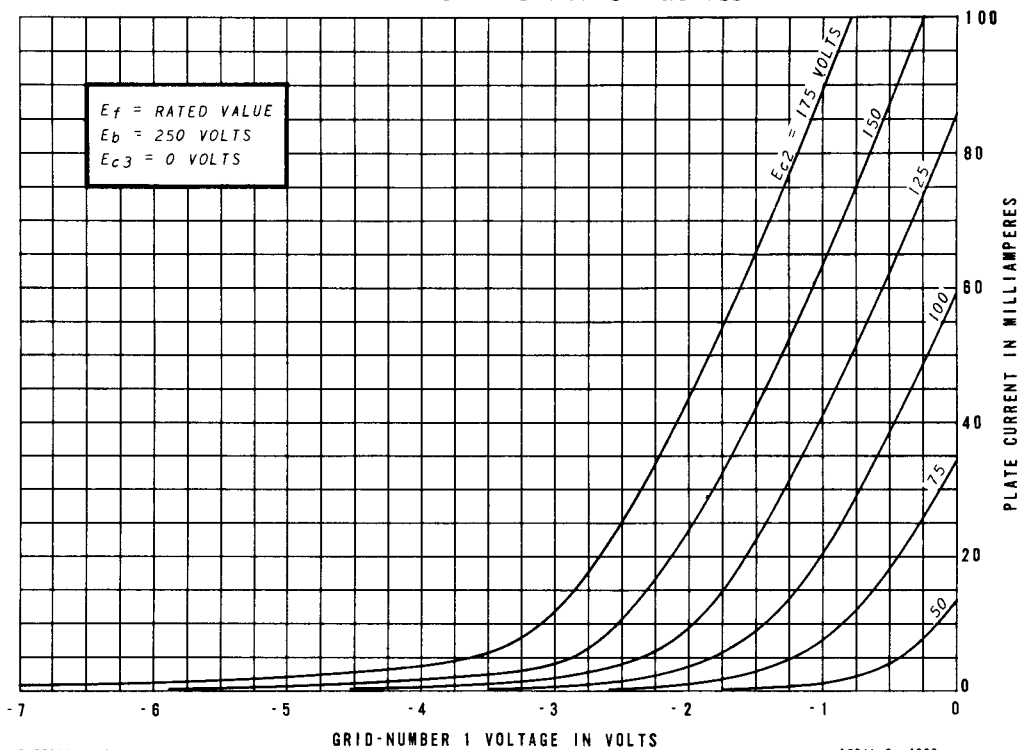

K-55611-TD323-4

APRIL 6, 1966

AVERAGE TRANSFER CHARACTERISTICS

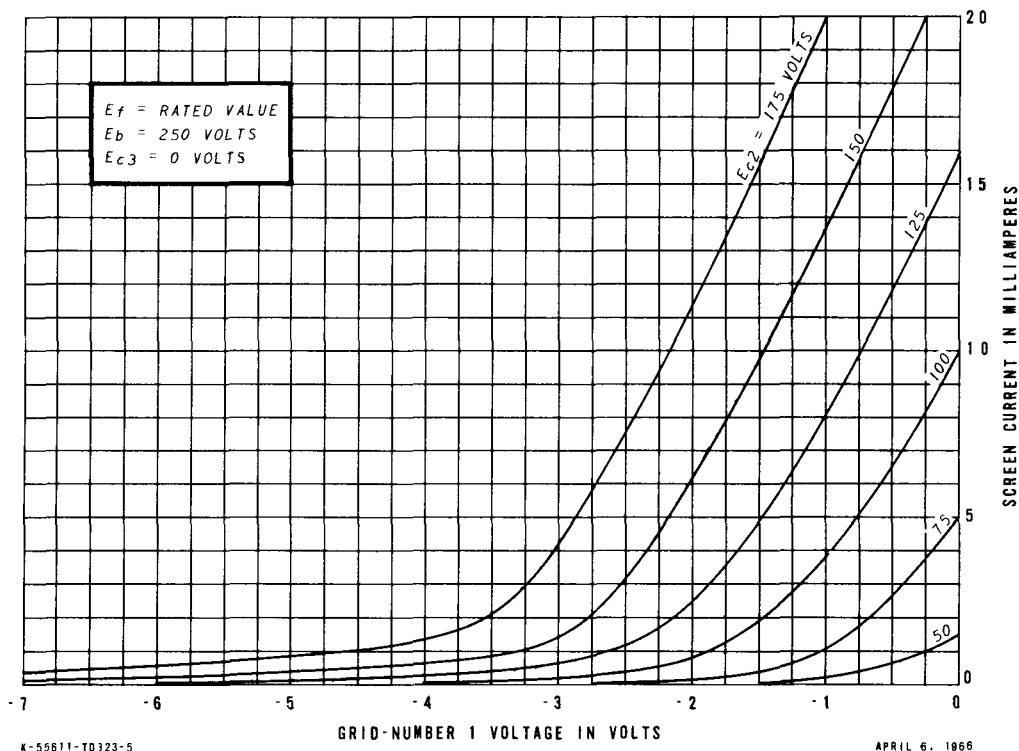

AVERAGE TRANSFER CHARACTERISTICS

