


TUNG-SOL

TRIODE






COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 300 MA.

AC OR DC

ANY MOUNTING POSITION



THE 6J5 AND 6J5GT ARE GENERAL PURPOSE MEDIUM-MU TRIODES. THEY ARE USEFUL FOR SERVICE AS OSCILLATORS OR AUDIO-FREQUENCY AMPLIFIERS.

DIRECT INTERELECTRODE CAPACITANCES - APPROX.

	6J5 ^A	6J5GT ^B	
GRID TO PLATE: (G TO P)	3.4	3.8	μμf
INPUT: G TO (H+K)	3.4	4.2	μμf
OUTPUT: P TO (H+K)	3.6	5	μμf

^A WITH SHELL CONNECTED TO CATHODE.

^B WITH CLOSE-FITTING SHIELD CONNECTED TO CATHODE.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-210

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	300	VOLTS
MINIMUM NEGATIVE DC GRID VOLTAGE	0	VOLTS
MAXIMUM GRID CIRCUIT RESISTANCE	1.0	MEG.
MAXIMUM PLATE DISSIPATION	2.5	WATTS
MAXIMUM CATHODE CURRENT	20	MA.

CONTINUED ON FOLLOWING PAGE

→ INDICATES A CHANGE OR ADDITION

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS


CLASS A₁ AMPLIFIER

HEATER VOLTAGE	6.3	6.3	VOLTS
HEATER CURRENT	300	300	MA.
PLATE VOLTAGE	90	250	VOLTS
GRID VOLTAGE	0	-8	VOLTS
PLATE CURRENT	10	9	MA.
PLATE RESISTANCE	6 700	7 700	OHMS
TRANSCONDUCTANCE	3 000	2 600	μMHOS
AMPLIFICATION FACTOR	20	20	

SIMILAR TYPE REFERENCE: Ratings and characteristics are identical to 744.

RESISTANCE COUPLED AMPLIFIER



R ₁ MEG.	R _{g1} MEG.	R _g MEG.	E _{bb} = 90 VOLTS			E _{bb} = 180 VOLTS			E _{bb} = 300 VOLTS		
			R _k	GAIN	E _o	R _k	GAIN	E _o	R _k	GAIN	E _o
0.10	A	0.10	3300	14	13	2200	14	26	1800	14	40
0.10	A	0.24	3600	14	16	2700	15	33	2200	15	51
0.24	A	0.24	7500	14	16	5100	15	30	4300	15	44
0.24	A	0.51	9100	14	19	6800	15	39	5100	15	54
0.51	A	0.51	13000	14	16	9100	15	30	6800	16	40
0.51	A	1.0	15000	14	19	10000	16	32	7500	16	45
0.24	10	0.24	---	15	13	---	16	33	---	17	46
0.24	10	0.51	---	16	17	---	17	38	---	18	62
0.51	10	0.51	---	16	14	---	18	32	---	18	53
0.51	10	1.0	---	17	18	---	18	41	---	19	68

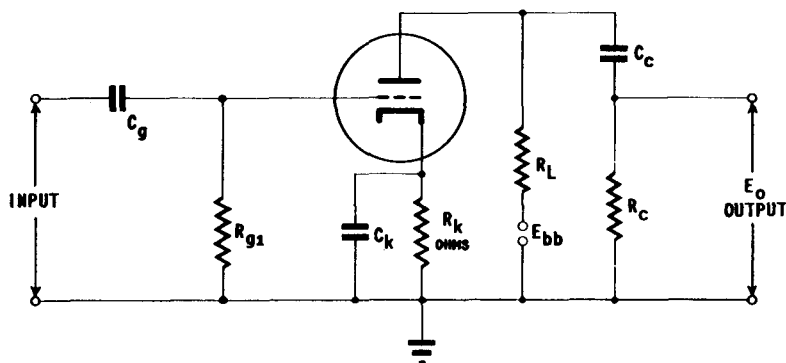A VALUE OF R_{g1} IS NOT CRITICAL.GAIN MEASURED AT E_o = 2.0 VOLTS RMS OUTPUT.E_o IS RMS OUTPUT FOR 5% TOTAL HARMONIC DISTORTION.

NOTE: COUPLING CAPACITORS C_g AND C_c SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE. R_k SHOULD BE ADEQUATELY BY-PASSED BY CAPACITOR C_k.

→ INDICATES A CHANGE OR ADDITION

PLATE
1945
JAN. 2,
1948

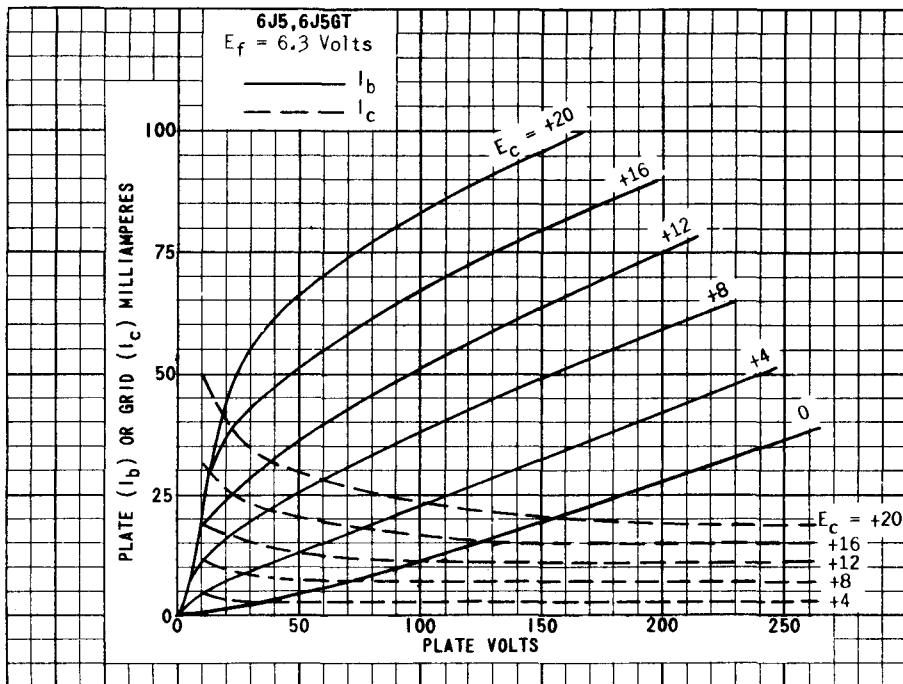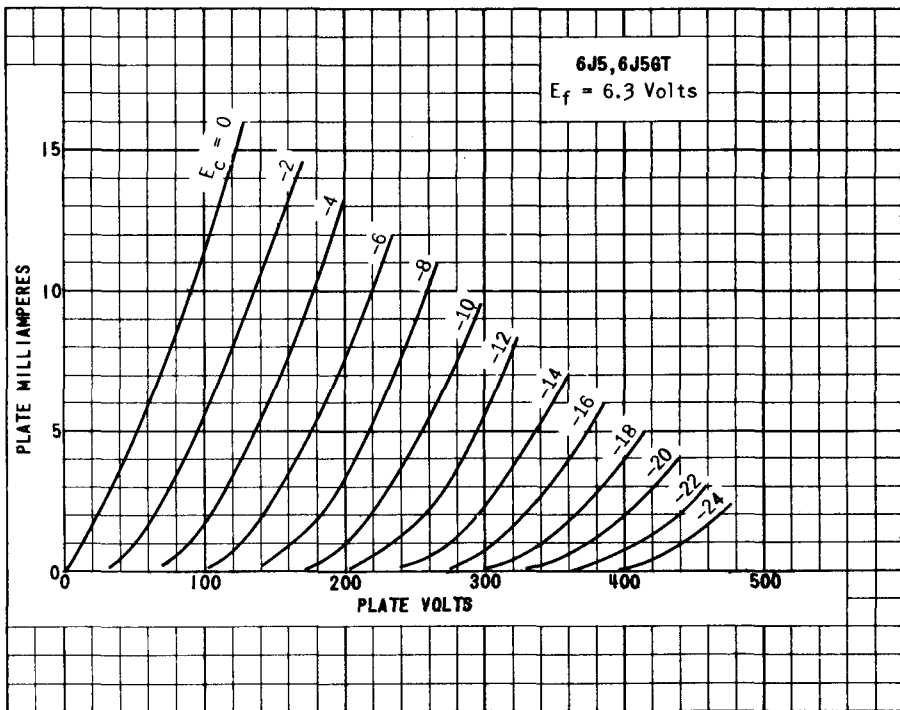

6J5,6J5GT

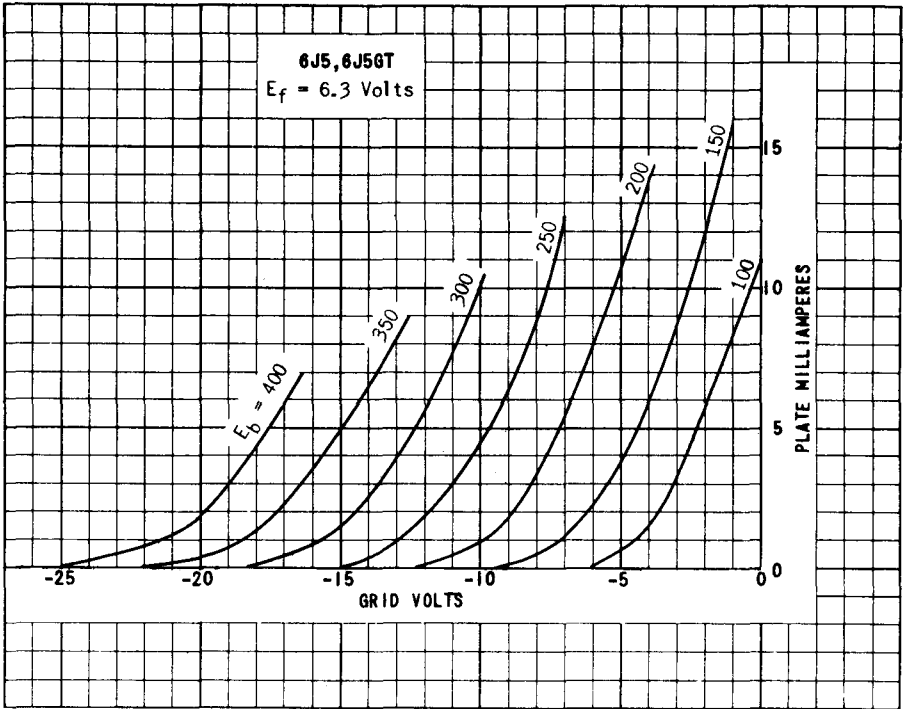
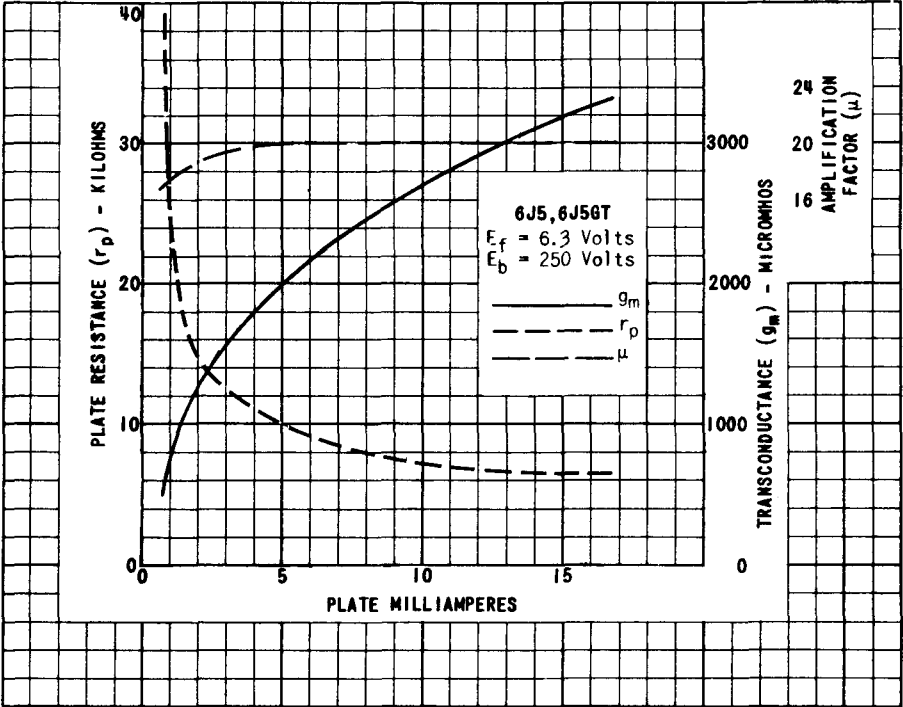


PLATE
1947
JAN. 2,
1948