



857-B

857-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

GENERAL DATA


Electrical:

Filamentary Cathode, Coated:

Voltage.	$5 \pm 5\%$	ac volts
Current.	30	amp
Minimum heating time at rated voltage	60	sec
Peak Tube Voltage		
Drop (Approx.)	15	volts

Mechanical:

Terminal Connections:

F₁ - Filament
(Insulated)F₂ - Filament,
Cathode Shield,
Shell (Anode
Return)

Cap - Anode

Mounting Position.	Vertical with filament end down
Maximum Overall Length (Including flexible leads)	29-7/8"
Seated Length.	19-1/2" $\pm$ 3/8"
Maximum Diameter	7-1/8"
Weight (Approx.)	4 lbs
Bulb	GT-56
Cap.	Skirted Large (JETEC No.C1-10)
Base	Terminal-Support Shell (JETEC No.FO-2)

Temperature Control:

Heating--When the ambient temperature is so low that the normal rise of condensed-mercury temperature above the ambient temperature will not bring the condensed-mercury temperature up to the minimum value of the operating ranges specified under *Maximum Ratings*, some form of heat-conserving enclosure or auxiliary heater will be required.

Cooling--When the operating conditions are such that the maximum value of the operating condensed-mercury temperature range is exceeded, provision should be made for forced-air cooling sufficient to prevent exceeding the maximum value.

Temperature Rise of Condensed-Mercury to Equilibrium Above Ambient Temperature (Approx.):*

No load.	11.5	°C
Full load.	15	°C

* With filament volts = 4.75 and no heat-conserving enclosure.

→ Indicates a change.

JULY 1, 1955

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

857-B



857-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

HALF-WAVE RECTIFIER

Maximum Ratings, Absolute Values: For supply frequency of 60 cps

Operating Condensed-Mercury
Temperature Range
25° to 60°C 30° to 40°C

PEAK INVERSE ANODE VOLTAGE.	10000 max.	22000 max.	volts
ANODE CURRENT:			
Peak	40 max.	40 max.	amp
Average**	10 max.	10 max.	amp
Fault, for dura- tion of 0.2 second max.	400 max.	400 max.	amp

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Filament Current	1	—	33	amp
Critical Anode Voltage . . .	2	—	100	volts
Peak Tube Voltage Drop . . .	3	—	25	volts

Note 1: With 5 volts rms on filament.

Note 2: With 4.75 volts rms on filament, and condensed-mercury temperature at 25°C, or above.

Note 3: With 5 volts rms on filament, condensed-mercury temperature of 35° ± 5°C, peak anode current of 100 amperes provided by half-cycle pulse from a 60-cps sine wave and recurring approximately once a second. Tube drop is measured by an oscilloscope connected between anode and center tap of filament transformer.

OPERATING CONSIDERATIONS

X-Ray Warning. X-rays are produced when the 857-B is operated with a peak inverse voltage above 16000 volts (absolute value). These rays can constitute a health hazard unless the tube is adequately shielded for X-ray radiation. Although relatively simple shielding should prove adequate, make sure that it provides the required protection to the operator.

Shields and rf filter circuits should be provided for the 857-B if it is subjected to extraneous high-frequency fields during operation. These fields tend to produce breakdown effects in mercury vapor and are detrimental to tube life and performance. When shields are used, special attention must be given to providing adequate ventilation and to maintaining normal condensed-mercury temperature. Rf filters are employed to prevent damage caused by rf currents which might otherwise be fed back into the rectifier tubes.

** Averaged over any period of 30 seconds maximum.

→ Indicates a change.

JULY 1, 1955

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



857-B

857-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

For Circuit Figures, see Front of this Section

CIRCUIT	MAX. TRANS. SEC. VOLTS (RMS) E	APPROX. DC OUTPUT VOLTS TO FILTER E _{av}	MAX. DC OUTPUT AMPERES I _{av}	MAX. DC OUTPUT KW TO FILTER P _{dc}		
Fig. 1 Half-Wave Single-Phase In-Phase Operation	15400 [□] 7000 [▲]	7000 3200	10 10	70 32		
Fig. 2 Full-Wave Single-Phase In-Phase Operation	7700 [□] 3500 [▲]	7000 3200	20 20	140 64		
Fig. 3 Series Single-Phase In-Phase Operation	15400 [□] 7000 [▲]	14000 6400	20 20	280 128		
Fig. 4 Half-Wave Three-Phase In-Phase Operation	8900 [□] 4000 [▲]	10500 4800	30 30	315 144		
Fig. 5 Parallel Three-Phase Quadrature Operation	8900 [□] 4000 [▲]	10500 4800	60 60	630 288		
Fig. 6 Series Three-Phase Quadrature Operation	8900 [□] 4000 [▲]	21000 9600	30 30	630 288		
Fig. 7 Half-Wave Four-Phase Quadrature Operation	7700 [□] 3500 [▲]	10100 4600	Resis- tive Load 36 36	Induc- tive Load 40 40	Resis- tive Load 364 166	Induc- tive Load 404 184
Fig. 8 Half-Wave Six-Phase Quadrature Operation	7700 [□] 3500 [▲]	10500 4800	Resis- tive Load 38 38	Induc- tive Load 40 40	Resis- tive Load 399 182	Induc- tive Load 420 192

□ For maximum peak inverse anode voltage of 22000 volts and maximum average current of 10 amperes.


▲ For maximum peak inverse anode voltage of 10000 volts and maximum average current of 10 amperes.

857-B



857-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

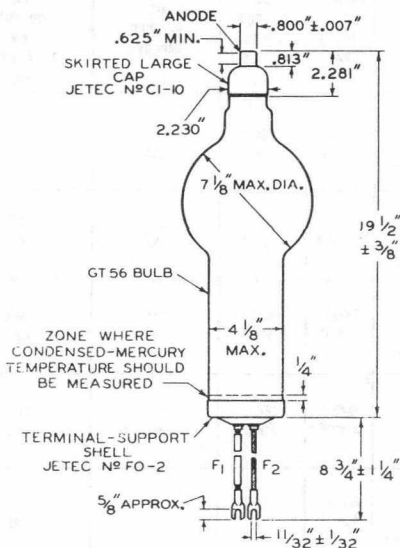

F₁ = FILAMENT (INSULATED)
 F₂ = FILAMENT, CATHODE SHIELD,
 AND SHELL (ANODE RETURN)

92CM-4649R3




857-B

857-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

TERMINAL-SUPPORT SHELL

SIZE AND SHAPE
OF HOLES MAY
VARY OR THEY
MAY BE OMITTED

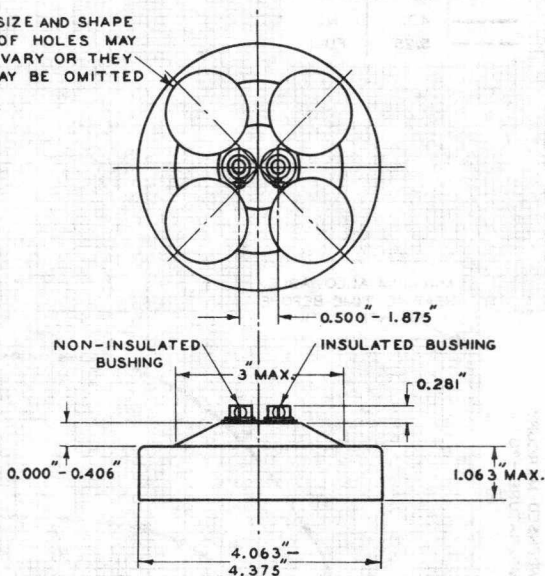

92CS-4653R2

JETEC No. F0-2
RCA No. 3911

JULY 1, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


CE-4653R2

857-B



857-B

RATE OF RISE OF COND.-MERCURY TEMPERATURE

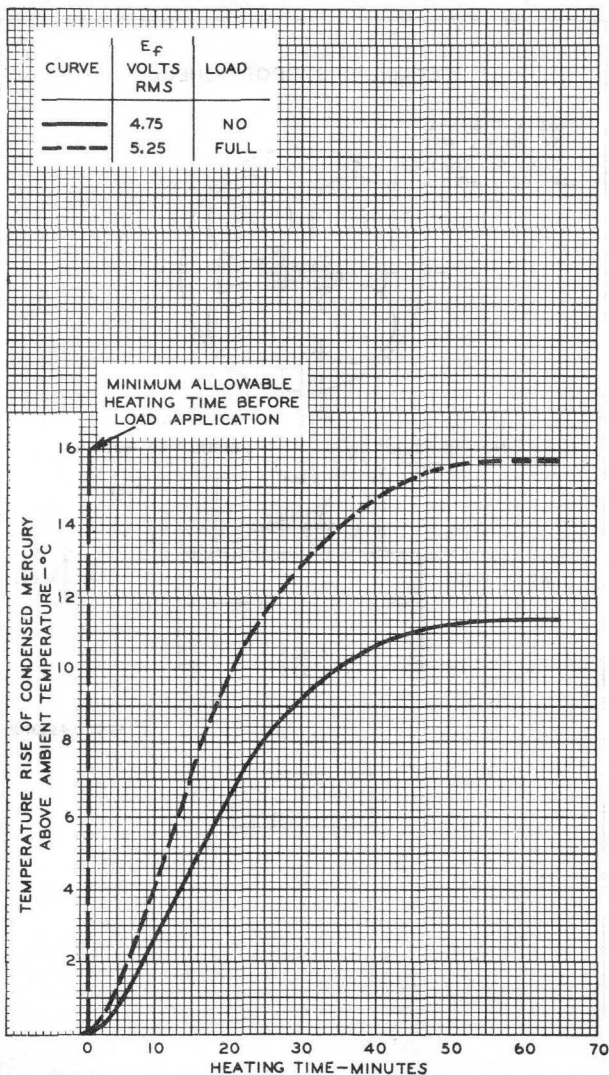

APRIL 16, 1951

TUBE DIVISION

92CM-7639

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY