

TRIODE HEXODE

ECH35

Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

HEATER

V_h	6.3	V
I_h	0.3	A

CAPACITANCES

	c_{gt-gl}	< 0.3 $\mu\mu F$
Hexode	c_{gl-k}	5.0 $\mu\mu F$
	c_{a-k}	10.0 $\mu\mu F$
	c_{a-gl}	< 0.003 $\mu\mu F$
Triode	c_{g-k}	9.0 $\mu\mu F$
	c_{a-k}	3.0 $\mu\mu F$
	c_{a-gl}	1.6 $\mu\mu F$

OPERATING CONDITIONS - HEXODE SECTION

(a) With fixed screen grid voltage

V_a			250	V
V_{g2+g4}			100	V
R_k			215	ohms
R_{g3}			50,000	ohms
I_{g3}			200	μA
V_{g1}	-2	-17	-23	V
I_a	3	-	-	mA
I_{g2+g4}	3	-	-	mA
g_c	650	6.5	1.5	$\mu A/V$
r_a	1.3	> 5.0	> 6.0	M.ohms

(b) With screen grid fed by a potentiometer (See diagram overleaf)

$V_a = V_b$			250	V
R_1			24,000	ohms
R_2			33,000	ohms
R_k			215	ohms
R_{g3}			50,000	ohms
I_{g3}			200	μA
V_{g1}	-2	-23.5	-31	V
V_{g2+g4}	100	-	145	V
I_{ah}	3	-	-	mA
I_{g2+g4}	3	-	-	mA
g_c	650	6.5	1.5	$\mu A/V$
r_a	1.3	> 3.0	> 4.0	M.ohms



Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

OPERATING CONDITIONS - TRIODE SECTION

V_b	100	250 V
R_a	-	45,000 ohms
I_a ($R_{gt} = 50,000$ ohms, $I_{gt} = 200 \mu A$)	3.3	3.3 mA
I_a ($V_{gt} = 0$ V) ($V_{osc} = 0$ V)	10	4.5 mA
S_m ($V_{gt} = 0$ V, $V_{osc} = 0$ V)	2.8	2.2 mA/V
μ ($V_{gt} = 0$ V, $V_{osc} = 0$ V)	24	24

LIMITING VALUES - HEXODE SECTION

$V_a(b)$ max.	550 V
V_a max.	300 V
w_a max.	1.2 W
V_{g2+g4} (b) max	550 V
V_{g2+g4} max. ($I_a = 4.5$ mA)	125 V
V_{g2+g4} max. ($I_a = < 0.5$ mA)	200 V
w_{g2+g4} max.	0.6 W
V_{g1} max. ($I_{g1} = +0.3$ uA)	-1.3 V
V_{g3} max. ($I_{g3} = +0.3$ uA)	-1.3 V
I_k max.	15 mA
R_{g1-k} max.	3 Mohm
R_{h-k} max.	20,000 ohms
V_{h-k}	100 V
R_{g3-k}	0.1 Mohm

LIMITING VALUES - TRIODE SYSTEM


$V_a(b)$ max.	550 V
V_a max.	100 V
w_a max.	1.5 W
V_{gt} max. ($I_{g1} = +0.3 \mu A$)	-1.3 V
R_{gt} max.	100,000 ohms



TRIODE HEXODE


Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

ECH35

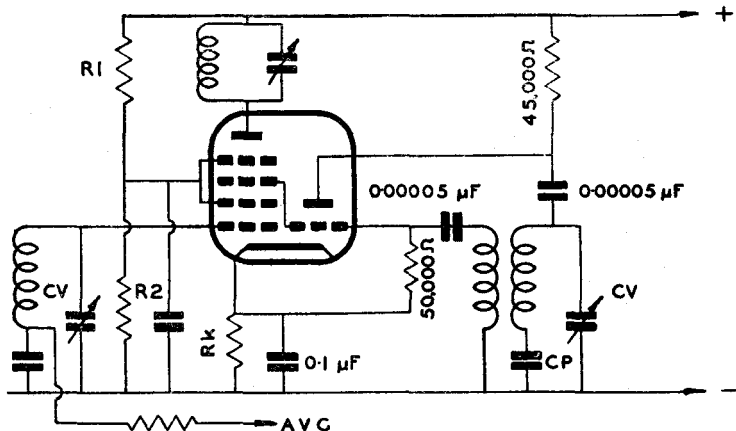


DIMENSIONS

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

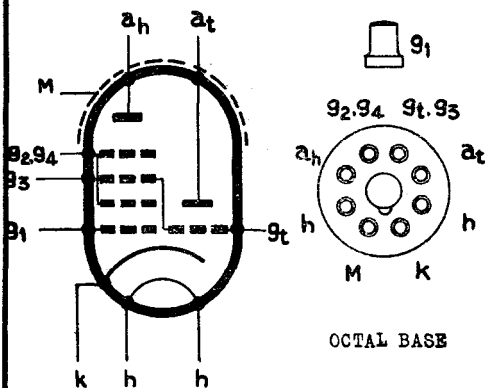


OCTAL BASE

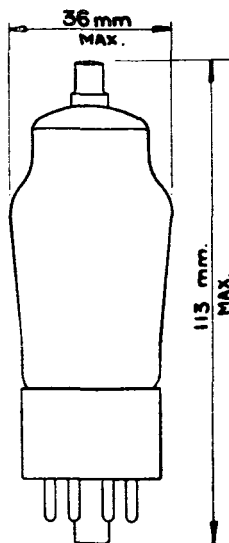

ECH35

TRIODE HEXODE


Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

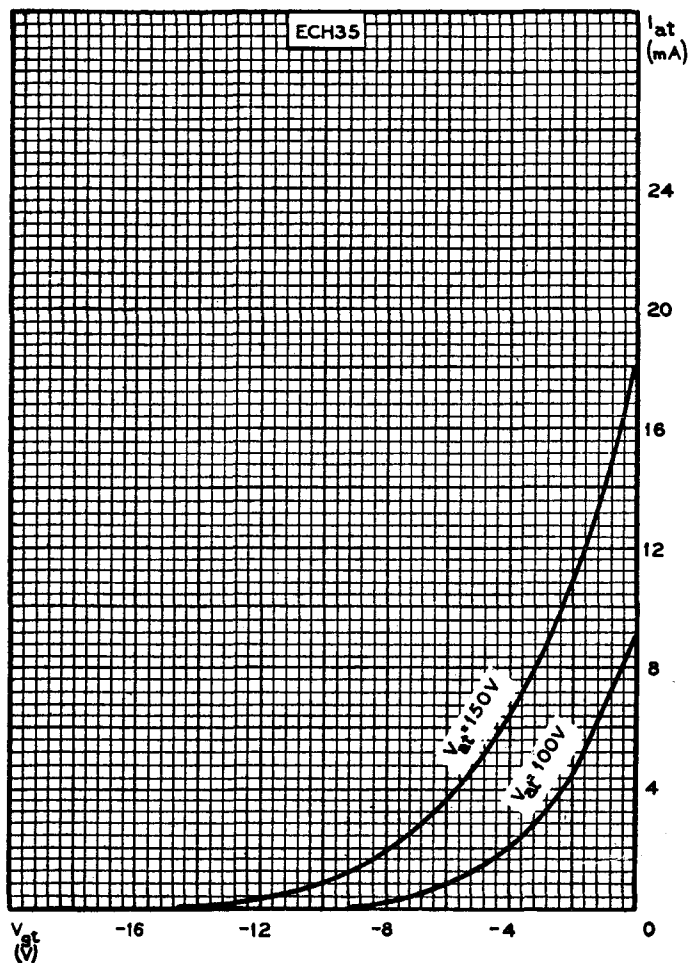

TRIODE HEXODE

Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.


ECH35

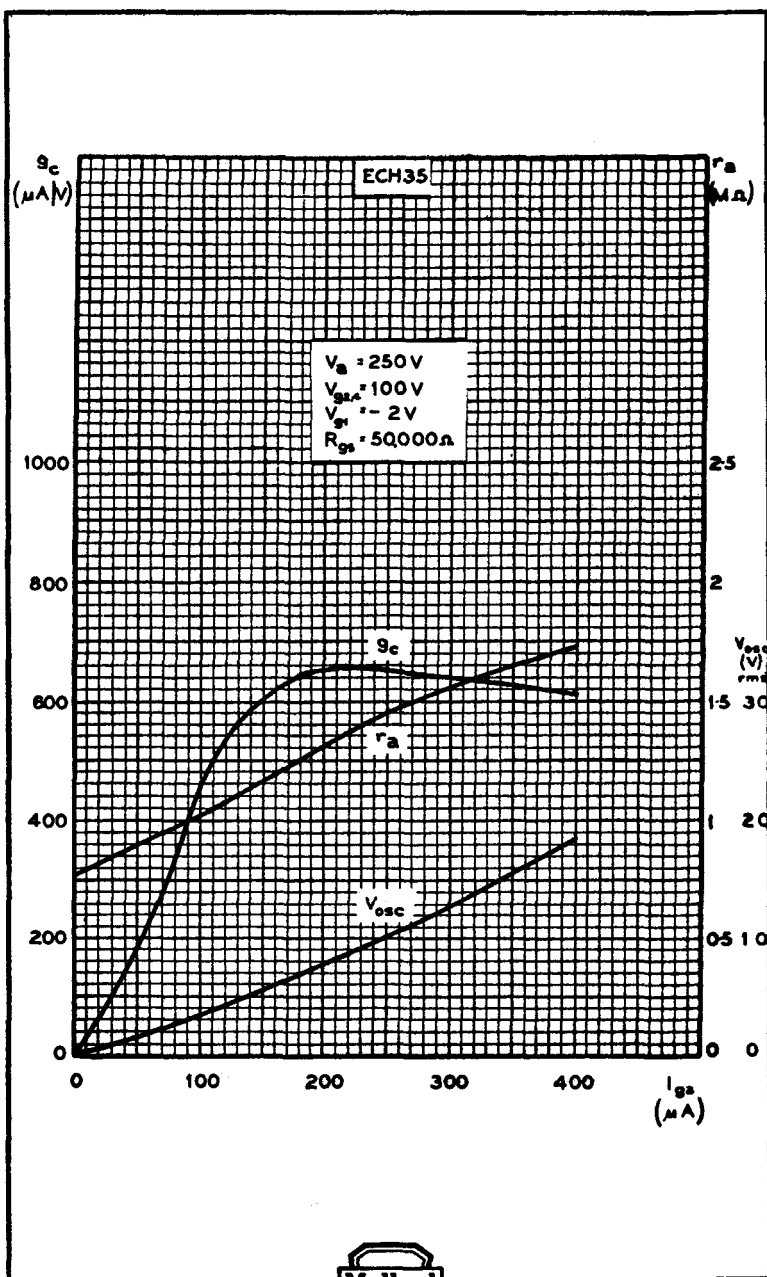

ECH35

TRIODE HEXODE



Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

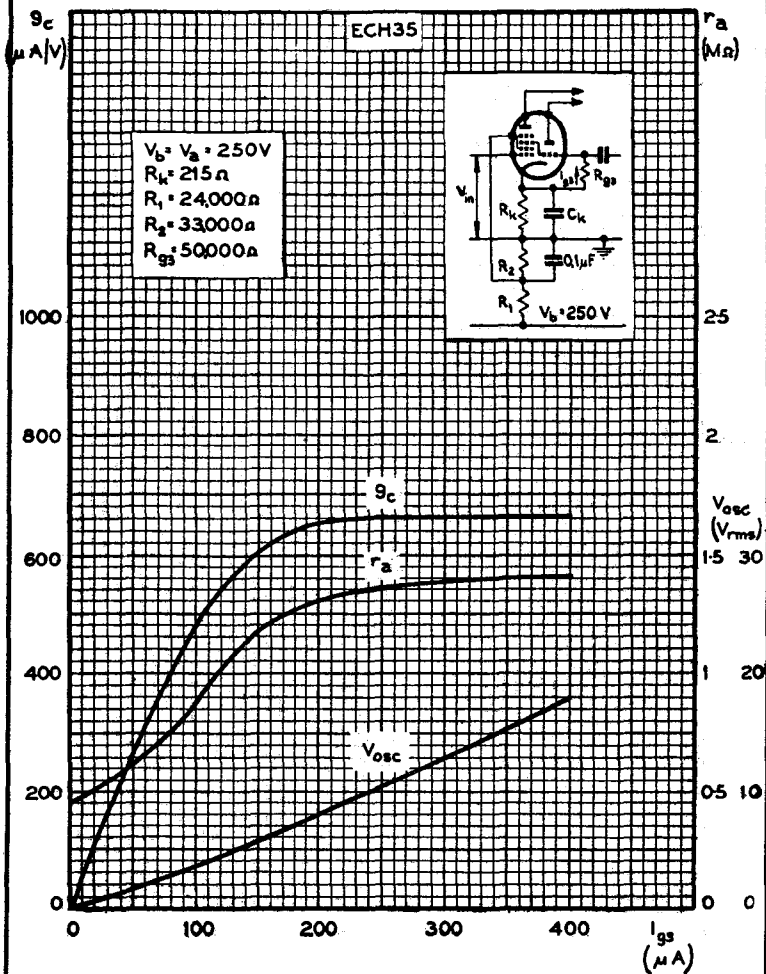

TRIODE HEXODE

ECH35



Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

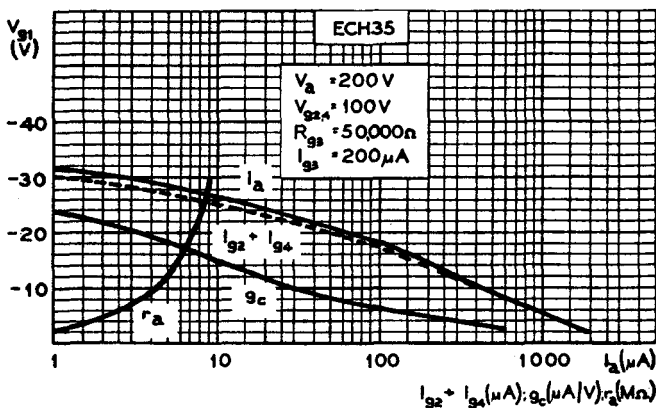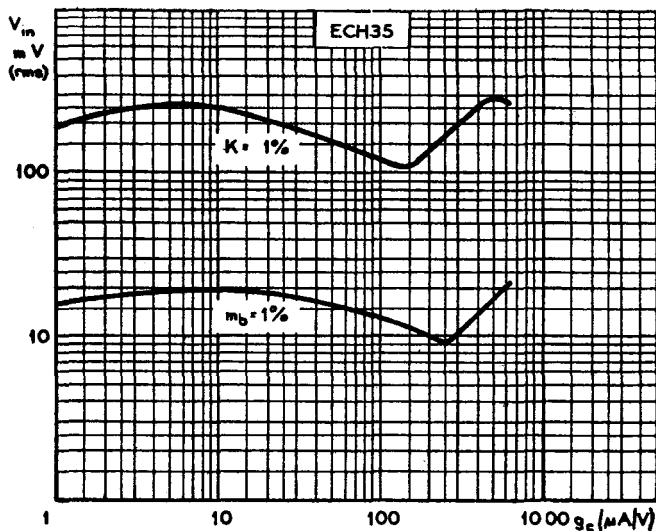

ECH35

TRIODE HEXODE

Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

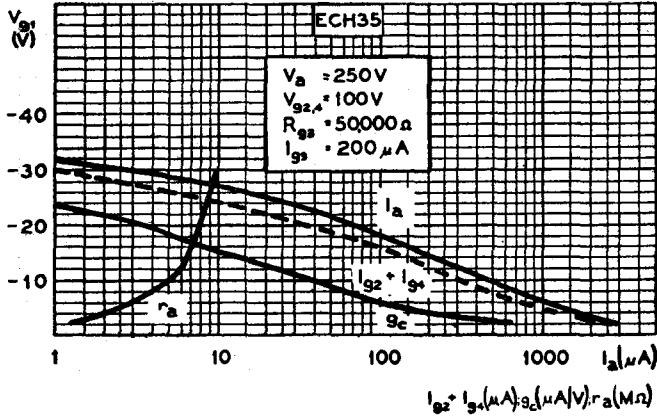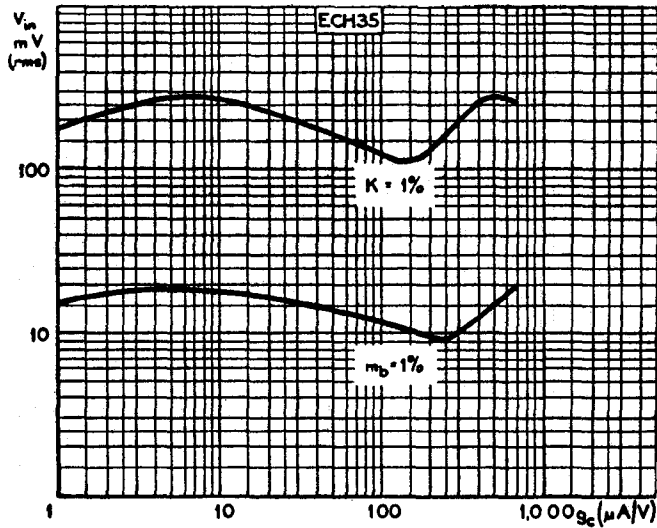

TRIODE HEXODE

Triode hexode for use as frequency changer in A.C. mains-operated receivers. The hexode section is designed for A.V.C.

ECH35

