

VARIABLE-MU R.F. PENTODE

EF39

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

HEATER

This valve is suitable for DC/AC operation.

V_h	6.3	V
I_h	0.2	A

CAPACITANCES


C_{a-g1}	<0.003	$\mu\mu F$
C_{in}	5.5	$\mu\mu F$
C_{out}	7.2	$\mu\mu F$

OPERATING CONDITIONS AS R.F. OR I.F. AMPLIFIER

V_a	200	200	250	250	V
R_{g2}	60,000	60,000	90,000	90,000	Ω
V_{g2}	100	200	100	250	V
V_{g3}	0	0	0	0	V
V_{g1}	-2.5	-39	-2.5	-49	V
I_a	6.0	-	6.0	-	mA
I_{g2}	1.7	-	1.7	-	mA
g_m	2.2	0.0055	2.2	0.0045	mA/V
r_a	0.9	> 10	1.25	> 10	$M\Omega$
R_k	325	325	325	325	Ω

OPERATING CONDITIONS AS CONTROLLED-GAIN R.C. COUPLED AMPLIFIER

V_b (V)	R_a ($M\Omega$)	R_{g2} ($M\Omega$)	I_a (mA)	I_{g2} (mA)	R_k (Ω)	V_c -(V)	V_{out} (Vrms)	$\frac{V_{out}}{V_{in}}$	D_{tot} (%)
250	0.2	0.8	0.87	0.26	1750	0	10	106	2.7
250	0.2	0.8	0.69	0.21	1750	5	10	40	2.7
250	0.2	0.8	0.55	0.17	1750	10	10	23	3.7
250	0.2	0.8	0.37	0.11	1750	18	10	11.6	4.8
250	0.2	0.8	0.17	0.05	1750	25	10	6.7	8.8
250	0.1	0.4	1.6	0.45	1000	0	10	85	2.5
250	0.1	0.4	1.22	0.36	1000	5	10	36	2.7
250	0.1	0.4	0.92	0.28	1000	10	10	20	4.1
250	0.1	0.4	0.57	0.18	1000	18	10	9.2	6.1
250	0.1	0.4	0.36	0.11	1000	25	10	5.5	9.5

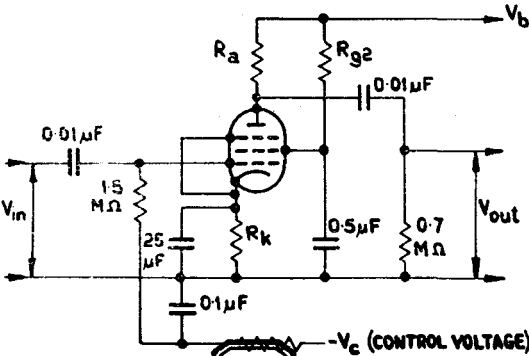

Mullard

EF39

VARIABLE-MU R.F. PENTODE


Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

LIMITING VALUES


$V_{a(b)}$ max.	550	V
V_a max.	300	V
w_a max.	2	W
I_k max.	10	mA
$V_{g2(b)}$ max.	550	V
V_{g2} max. ($I_a=6\text{mA}$)	125	V
V_{g2} max. ($I_a=3\text{mA}$)	300	V
w_{g2} max.	0.3	W
I_{g2} max. ($I_a=6\text{mA}$; $V_{g2}=100$)	2.0	mA
I_{g2} min. ($I_a=6\text{mA}$; $V_{g2}=100$)	1.2	mA
V_{g1} max. ($I_g=+0.3\mu\text{A}$)	-1.3	V
R_{g1} max.	3	M Ω
V_{h-k} max.	100	V
R_{h-k} max.	20,000	Ω

DIMENSIONS

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

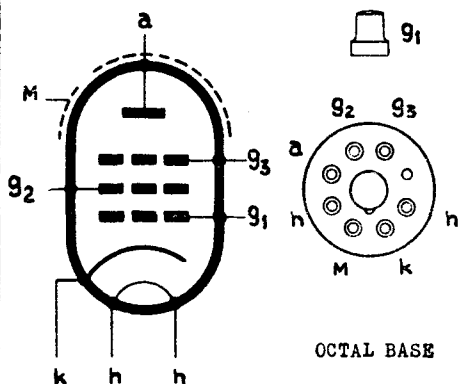


OCTAL BASE

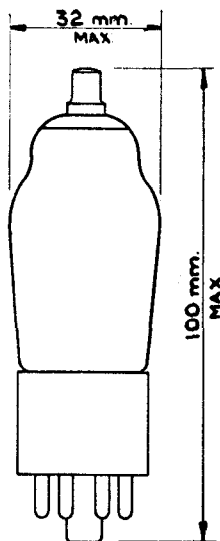


VARIABLE-MU R.F. PENTODE

EF39

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

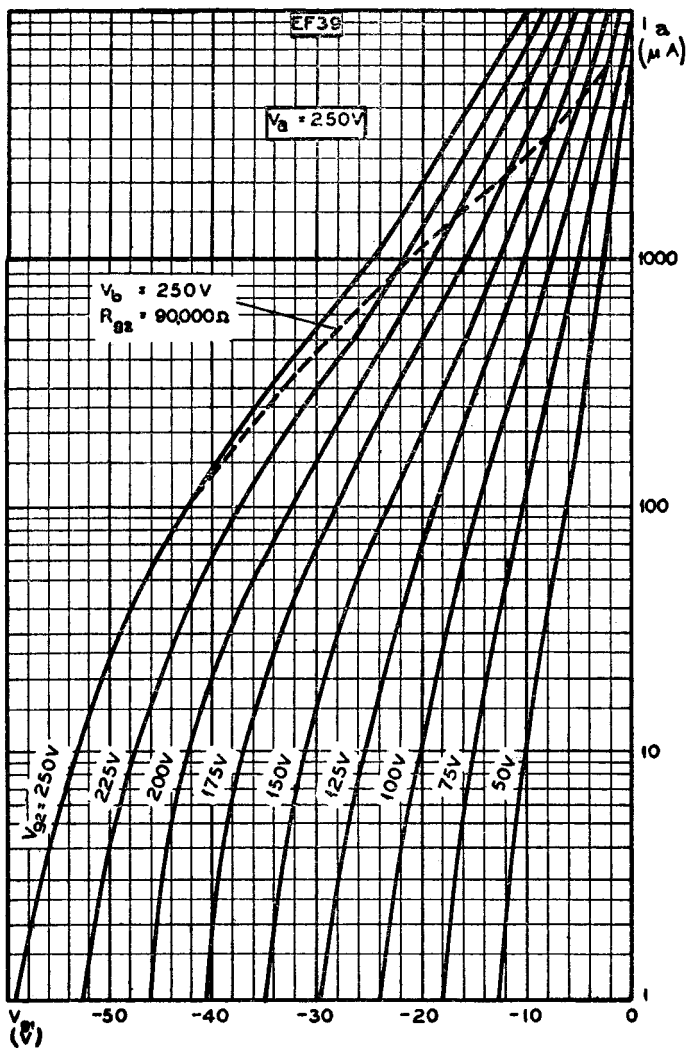


Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

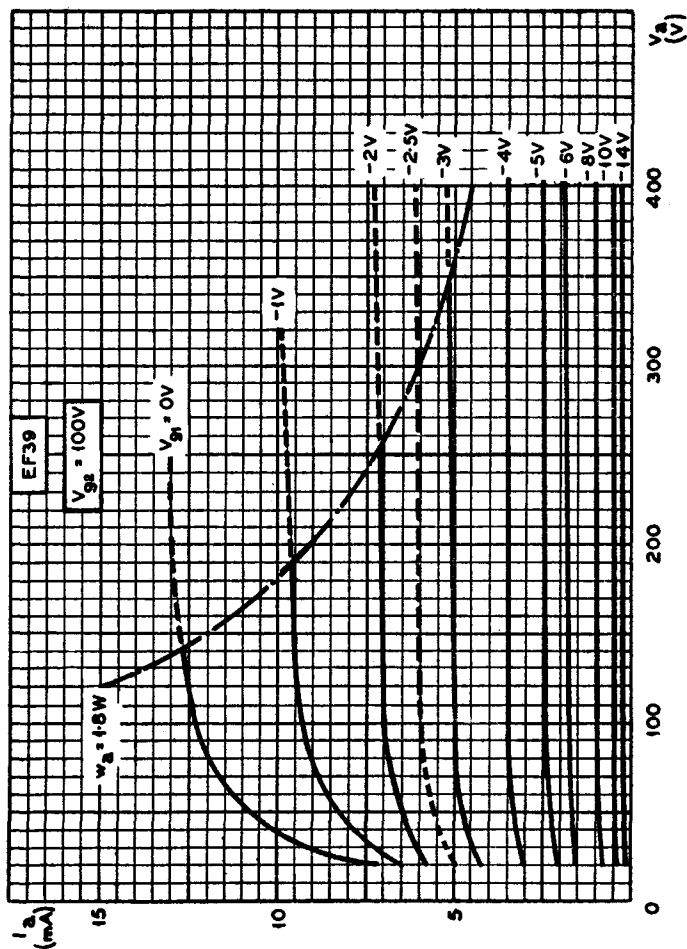


VARIABLE-MU R.F. PENTODE

EF39

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

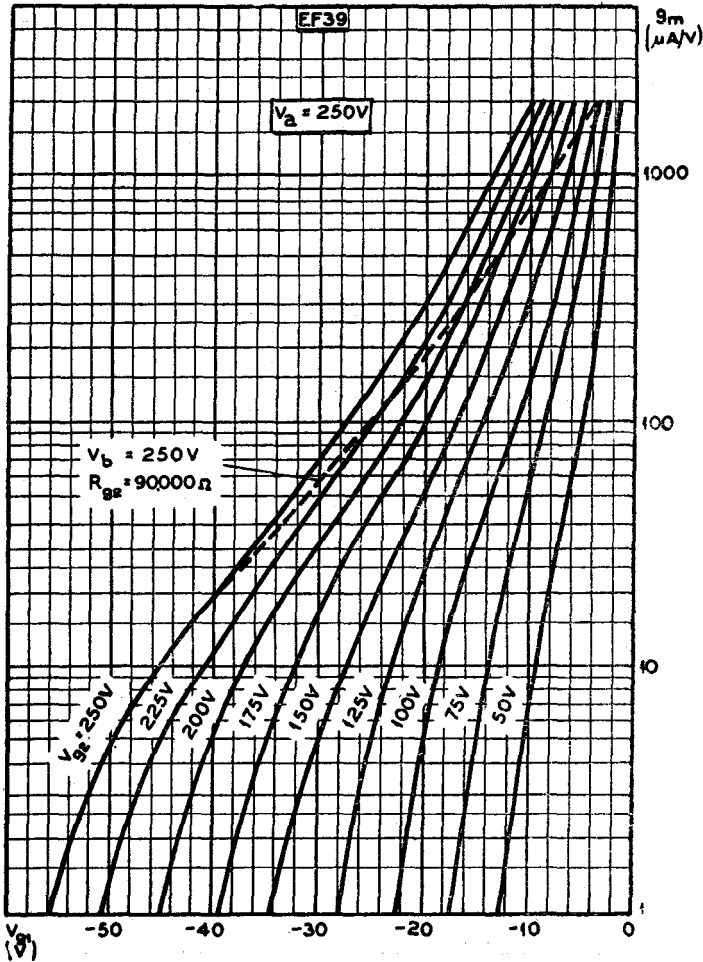




Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

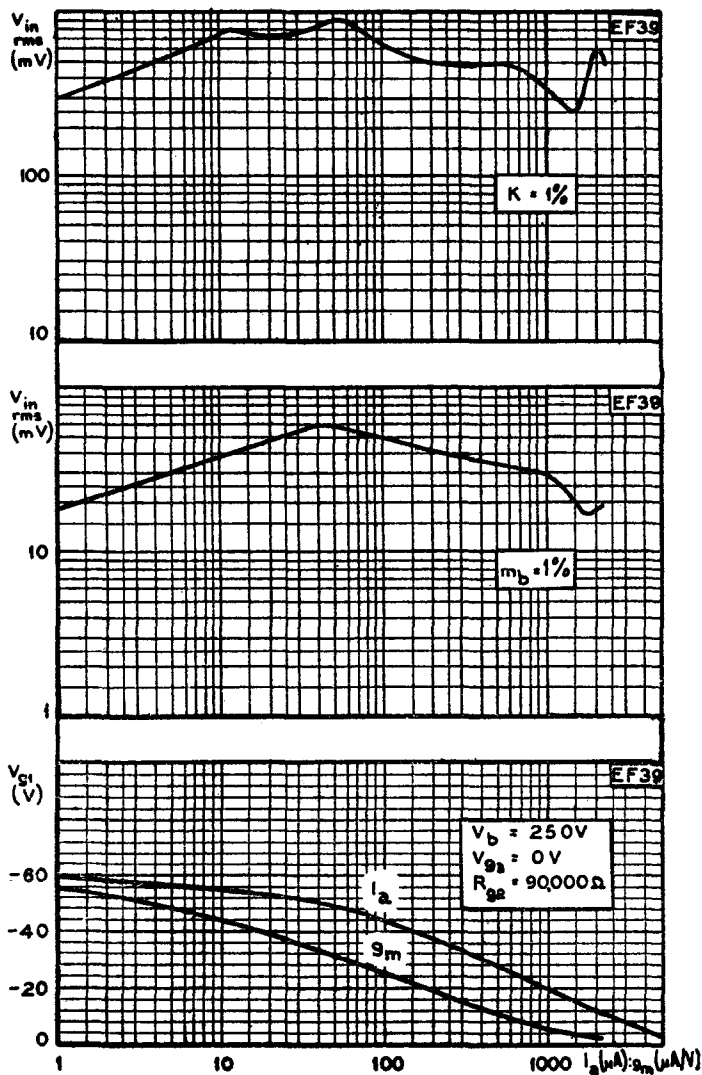

VARIABLE-MU R.F. PENTODE


EF39

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

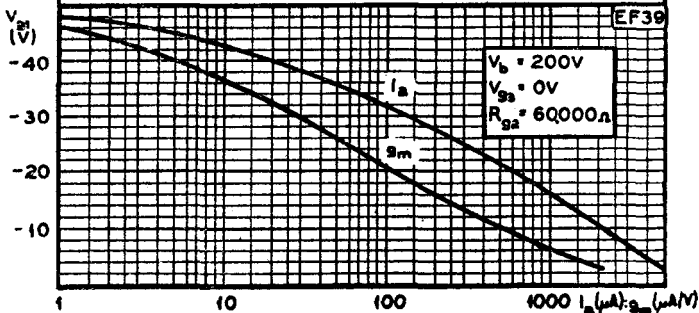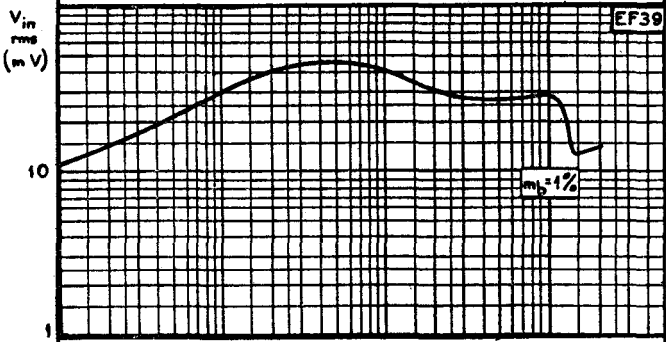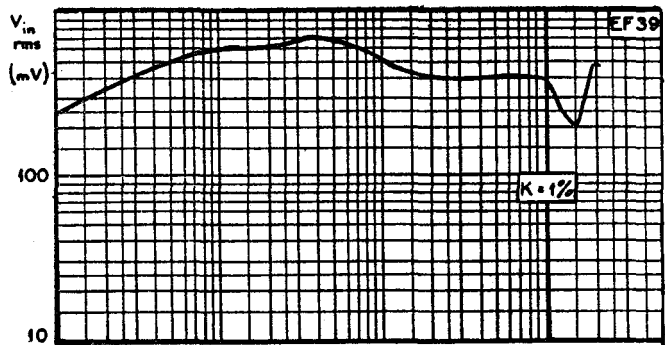

VARIABLE-MU R.F. PENTODE

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

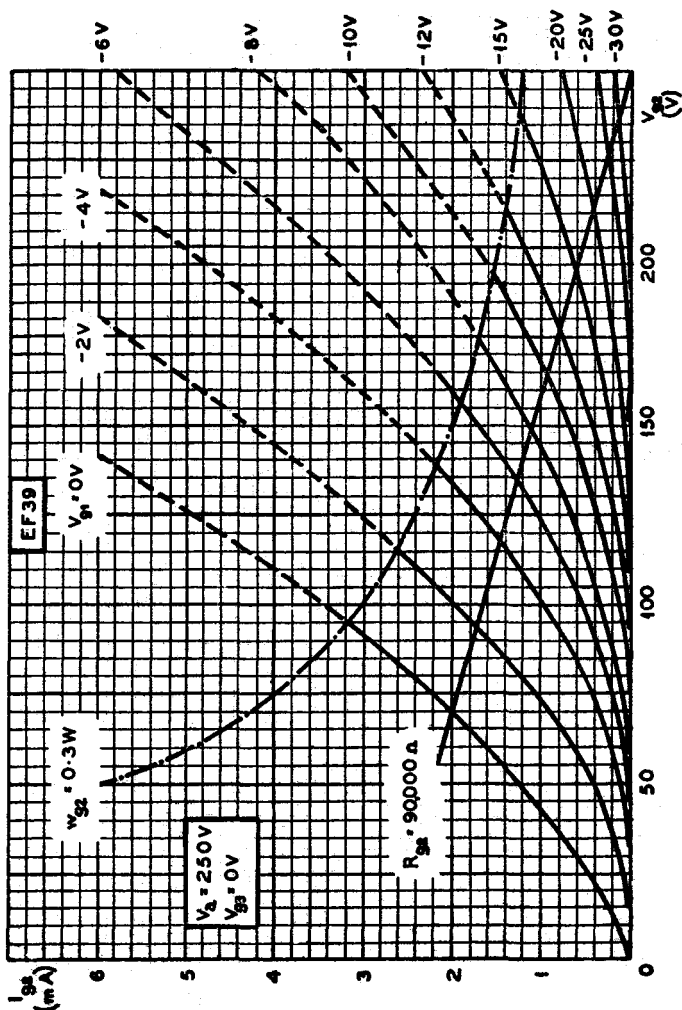

VARIABLE-MU R.F. PENTODE

EF39

Variable-mu R.F. pentode with sliding screen characteristics, for use as controlled R.F. or I.F. amplifier.

