

FULL-WAVE RECTIFIER

EZ41

Indirectly-heated full-wave rectifier primarily intended
for use in car radio receivers.

HEATER


V_h	6.3	V
I_h	0.4	A

MOUNTING POSITION

Any

LIMITING VALUES

V_a (r.m.s.) max.				2×250	V
I_{out} max.				60	mA
V_{h-k} (pk) max.				350	V
C max.	8	16	32	50	μF
R_{lim} min.	150	250	300	325	Ω
(each anode)					

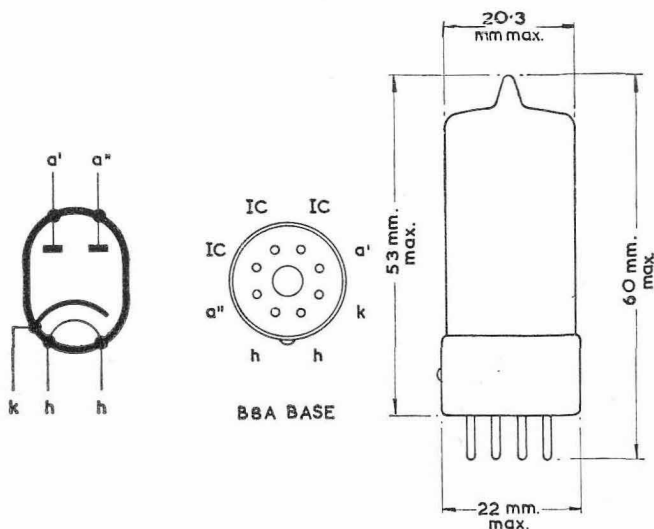

628

EZ41

FULL-WAVE RECTIFIER

Indirectly-heated full-wave rectifier primarily intended
for use in car radio receivers.

