

TUNG-SOL

CATHODE RAY

THE 17ATP4 AND 17ATP4A ARE DIRECT VIEW PICTURE TUBES DESIGNED FOR TELEVISION APPLICATIONS. THEY ARE IDENTICAL EXCEPT FOR THE METAL-BACKED SCREEN ON THE 17ATP4A. THEIR COMMON FEATURES INCLUDE:

MAGNETIC DEFLECTION	SPHERICAL FACEPLATE
UNIPOTENTIAL CATHODE	GREY FILTER FACEPLATE
RECTANGULAR GLASS CONSTRUCTION	EXTERNAL CONDUCTIVE COATING
LOW VOLTAGE ELECTROSTATIC FOCUS	EXTERNAL SINGLE FIELD ION TRAP
10 3/4" X 14 1/4" RASTER SIZE	

ELECTRICAL DATA

FOCUSING METHOD	LOW VOLTAGE ELECTROSTATIC	
DEFLECTING METHOD	MAGNETIC	
DEFLECTION ANGLE (APPROX.):		
HORIZONTAL	80	DEGREES
VERTICAL	65	DEGREES
DIAGONAL	90	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):		
CATHODE TO ALL OTHER ELECTRODES	5	μuf
GRID #1 TO ALL OTHER ELECTRODES	6	μuf
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE ^A	1 500	μuf
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE ^A	750	μuf

OPTICAL DATA

PHOSPHOR NUMBER	SULFIDE TYPE	P-4
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		SHORT
FACEPLATE TRANSMISSION AT CENTER (APPROX.)	66	PERCENT

RATINGS

	DESIGN CENTER VALUES	
HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE, GRID #3, GRID #5 VOLTAGE ^B	16 000	VOLTS
MAXIMUM DC GRID #4 VOLTAGE:		
POSITIVE	1 000	VOLTS
NEGATIVE ^C	500 ^C	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	500	VOLTS
MAXIMUM GRID #1 VOLTAGE:		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	VOLTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEGOHMS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE, GRID #3, GRID #5 VOLTAGE	14 000	VOLTS
DC GRID #4 VOLTAGE (WITH ANODE CURRENT OF 100 $\mu\text{AMP.}$)	-55 TO +300	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^D	-33 TO -77	VOLTS
DC ION TRAP MAGNET	37	GAUSSSES

^A EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

^B BRILLIANCE AND DEFINITION DECREASE WITH DECREASING ANODE VOLTAGE. IN GENERAL, THE ANODE VOLTAGE SHOULD NOT BE LESS THAN 12,000 VOLTS.

^C THIS VALUE APPLIES WHERE AN AC VOLTAGE IS PROVIDED FOR DYNAMIC FOCUSING.

^D VISUAL EXTINCTION OF UNDEFLECTED FOCUSED SPOT.

INASMUCH AS THE TUBE RATING PERMITS OPERATION AT VOLTAGES AS HIGH AS 17.6 KILOVOLTS (ABSOLUTE VALUE), SHIELDING OF THE TUBE FOR X-RAY RADIATION MAY BE NEEDED WHEREVER THE OPERATING CONDITIONS INVOLVE VOLTAGES IN EXCESS OF 16 KILOVOLTS.


CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE


MECHANICAL DATA

OVERALL LENGTH	$16 + \frac{1}{4} - \frac{3}{8}$	INCHES
GREATEST DIMENSIONS OF BULB:		
DIAGONAL	$16 \frac{5}{8} \pm \frac{1}{8}$	INCHES
WIDTH	$15 \frac{3}{8} \pm \frac{1}{8}$	INCHES
HEIGHT	$12 \frac{1}{4} \pm \frac{1}{8}$	INCHES
MINIMUM USEFUL SCREEN DIMENSIONS:		
DIAGONAL	$15 \frac{1}{4}$	INCHES
WIDTH	$14 \frac{1}{4}$	INCHES
HEIGHT	$11 \frac{1}{16}$	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 6 PIN	B6-63
BASING		12L
BULB CONTACT ALIGNMENT		
J1-21 CONTACT ALIGNS WITH PIN POSITION #6 $\pm$ 30 DEGREES		

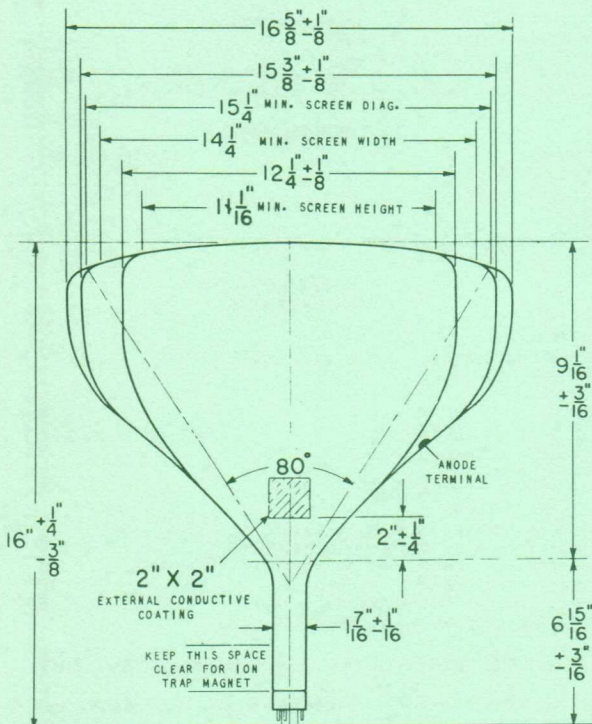

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID #1
 PIN 6 - GRID #4
 PIN 10 - GRID #2
 PIN 11 - CATHODE



PIN 12 - HEATER
 ANODE CAP:
 GRID #3
 GRID #5
 COLLECTOR

BOTTOM VIEW

SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY.