

TUNG-SOL

CATHODE RAY

THE 17BNP4 IS A DIRECT-VIEW PICTURE TUBE DESIGNED FOR TELEVISION APPLICATIONS. ITS FEATURES INCLUDE:

ELECTROSTATIC FOCUS	ALUMINIZED SCREEN
UNIPOTENTIAL CATHODE	MAGNETIC DEFLECTION
GRAY FILTER FACEPLATE	EXTERNAL CONDUCTIVE COATING
RECTANGULAR GLASS CONSTRUCTION	14 5/16" X 11 1/8" RASTER SIZE
DOES NOT REQUIRE ION TRAP	

ELECTRICAL DATA

		ELECTROSTATIC
		MAGNETIC
FOCUSING METHOD		
DEFLECTING METHOD		
DEFLECTION ANGLE (APPROX.):		
HORIZONTAL	85	DEGREES
VERTICAL	68	DEGREES
DIAGONAL	90	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):		
CATHODE TO ALL OTHER ELECTRODES	5	μf
GRID #1 TO ALL OTHER ELECTRODES	6	μf
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	1500	μf
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	750	μf

OPTICAL DATA

PHOSPHOR NUMBER	P-4
FLUORESCENT COLOR	WHITE
PHOSPHORESCENT COLOR	WHITE
PERSISTENCE	SHORT
FACEPLATE TRANSMISSION AT CENTER (APPROX.):	74 PERCENT

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM
CATHODE DRIVE SERVICE

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE VOLTAGE*	18 000	VOLTS
MAXIMUM DC GRID #4 VOLTAGE	-500 TO +1000	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	200	VOLTS
MAXIMUM GRID #1 VOLTAGE:		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	0	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	VOLTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEG OHMS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CATHODE DRIVE^A

DC ANODE VOLTAGE	14 000	VOLTS
DC GRID #4 VOLTAGE	-50 TO +350	VOLTS
DC GRID #2 VOLTAGE	110	VOLTS
DC GRID #1 VOLTAGE ^B	-37 TO -50	VOLTS

^A THIS TUBE MAY BE OPERATED IN GRID DRIVE IF DESIRED, WITH SOME LOSS IN EFFICIENCY. AVERAGE RASTER CUTOFF, USING DRIVE, MAY BE CALCULATED: $E_{g1\text{cutoff}} = .502 E_{g2} + 5.8$

^B VISUAL EXTINCTION OF FOCUSED RASTER.

* BRILLIANCE AND DEFINITION DECREASE WITH DECREASING ANODE VOLTAGE. IN GENERAL, ANODE VOLTAGE SHOULD NOT BE LESS THAN 12,000 VOLTS.


CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE


MECHANICAL DATA

OVERALL LENGTH	14 9/16 ± 3/8	INCHES
GREATEST DIMENSIONS OF BULB:		
DIAGONAL	16 5/8 ± 1/8	INCHES
WIDTH	15 3/8 ± 1/8	INCHES
HEIGHT	12 1/4 ± 1/8	INCHES
MIN. USEFUL SCREEN DIMENSIONS:		
DIAGONAL	15 9/16	INCHES
WIDTH	14 5/16	INCHES
HEIGHT	11 1/8	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 6 PIN	B6-63
BASING		12L
BULB CONTACT ALIGNMENT		
J1-21 CONTACT ALIGNS WITH PIN POSITION #6 ±30 DEGREES		

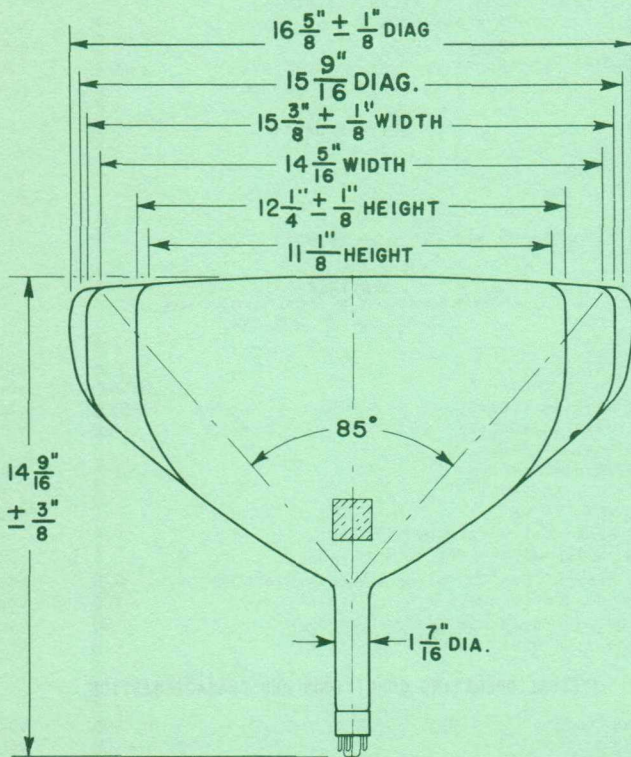

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID #1
 PIN 6 - GRID #4
 PIN 10 - GRID #2
 PIN 11 - CATHODE



PIN 12 - HEATER
 ANODE CAP:
 GRID NO. 3
 GRID NO. 5

BOTTOM VIEW