

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	105 Degrees
Diagonal	110 Degrees
Vertical	87 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	79 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	$0.6 \pm 5\%$ Ampere
Heater Warm-up Time ¹	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μ f
Grid No. 1 to All Other Electrodes	6 μ f
External Conductive Coating to Anode ²	1500 μ f
	1000 μ f
	Max.
	Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions	
(Maximum Assured)	14 $\frac{3}{4}$ x 11 $\frac{1}{16}$ Inches
Minimum Useful Screen Area	155 Sq. Inches
Bulb	J132 $\frac{1}{2}$ A1 or Equiv.
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B7-183
Basing	8HR
Weight	10 Pounds Approx.

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)



Anode Voltage	17,600 Volts	dc
Grid No. 4 Voltage (Focusing Electrode)	-550 to +1100 Volts	dc
Grid No. 2 Voltage	550 Volts	dc
Grid No. 1 Voltage		
Negative Bias Value	154 Volts	dc
Negative Peak Value	220 Volts	
Positive Bias Value	0 Volts	dc
Positive Peak Value	2 Volts	
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode		
During Warm-up Period not to Exceed 15 Seconds	450 Volts	
After Equipment Warm-up Period	200 Volts	
Heater Positive with Respect to Cathode	200 Volts	

TYPICAL OPERATING CONDITIONS

Anode Voltage	14,000 Volts	dc
Grid No. 4 Voltage for Focus	-50 to +350 Volts	dc
Grid No. 2 Voltage	300 Volts	dc
Grid No. 1 Voltage Required for Cutoff ³	-35 to -72 Volts	dc

QUICK REFERENCE DATA

Television Picture Tube
17" Direct Viewed
Rectangular Glass Type
Lightweight Tube
Spherical Faceplate
Gray Filter Glass
Aluminized Screen
Electrostatic Focus
110° Magnetic Deflection
1 $\frac{1}{8}$ " Neck Diameter
No Ion Trap
External Conductive Coating

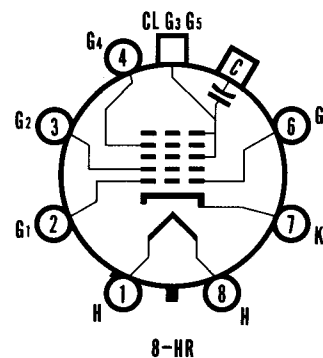

**SYLVANIA ELECTRIC
PRODUCTS INC.**

**TELEVISION PICTURE TUBE
DIVISION
SENECA FALLS, NEW YORK**

*Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA*

JUNE, 1957

PAGE 1 OF 3

CIRCUIT VALUES

Grid No. 1 Circuit Resistance 1.5 Megohms Max.

NOTES:

- 1. Heater warm-up time is the time required for the voltage across the heater terminals to increase to 5.0 volts in the JETEC test circuit, with $E = 25$ volts and series $R = 31.5$ ohms.
- 2. External conductive coating must be grounded.
- 3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

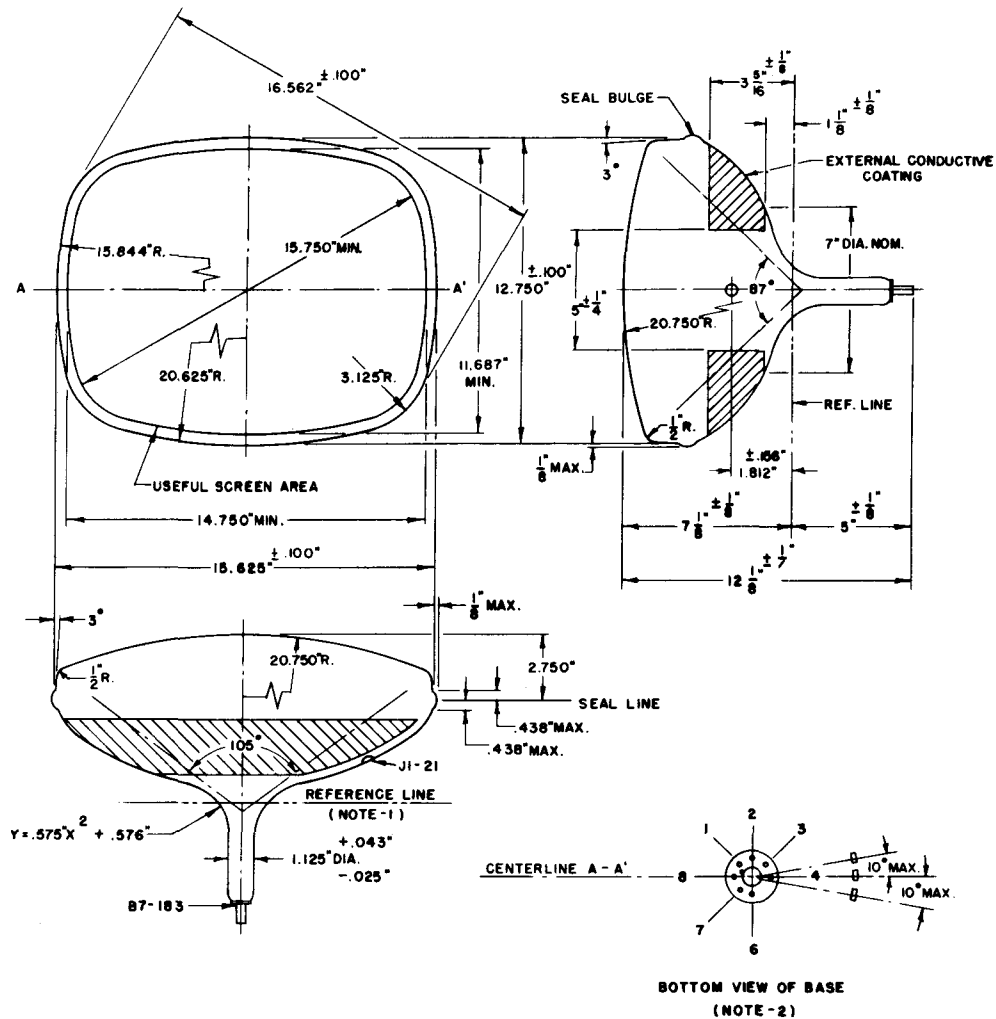


DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JETEC No. 126 Reference Line Gauge when the gauge is seated against the bulb.
2. Base pin No. 4 aligns with horizontal centerline of tube, within 10° , and is on the same side of tube as anode contact (J1-21).
3. Dimensions are in inches.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.