


TUNG-SOL

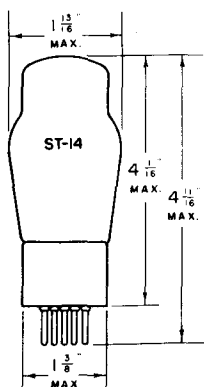


TRIODE POWER AMPLIFIER

COATED FILAMENT

5.0 VOLTS 1.25 AMPERES
AC OR DC

GLASS BULB

MEDIUM 4 PIN BASE



4D

BOTTOM VIEW

THE TUNG-SOL 183 IS A FILAMENT TYPE POWER TRIODE SUITABLE FOR SERVICE IN THE OUTPUT STAGE OF AC OPERATED RECEIVERS.

OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

PLATE VOLTAGE	250	VOLTS
GRID VOLTAGE	-60	VOLTS
PLATE CURRENT	25	MA.
PLATE RESISTANCE	1800	OHMS
TRANSCONDUCTANCE	1800	μMHOS
AMPLIFICATION FACTOR	3.2	
LOAD RESISTANCE	4500	OHMS
POWER OUTPUT	2.0	WATTS