

High vacuum HALF-WAVE RECTIFYING VALVE for high voltage

TUBE REDRESSEUR MONOPLAQUE à vide poussé pour haute tension

Hochvakuum EINWEGGLEICHTERRÖHRE für Hochspannung

Heating: indirect by A.C.

Chauffage: indirect par C.A.

Heizung: indirekt durch Wechselstrom


$$V_f = 4 \text{ V}$$

$$I_f = 0,7 \text{ A}$$

Dimensions in mm

Dimensions en mm

Abmessungen in mm



Base, culot, Fuss: Edison

Limiting values

Caractéristiques limites


Grenzdaten

$$V_{tr} = \text{max. } 10\,500 \text{ V}_{eff}$$

$$I_o = \text{max. } 2 \text{ mA}$$

1878

"Miniwatt"

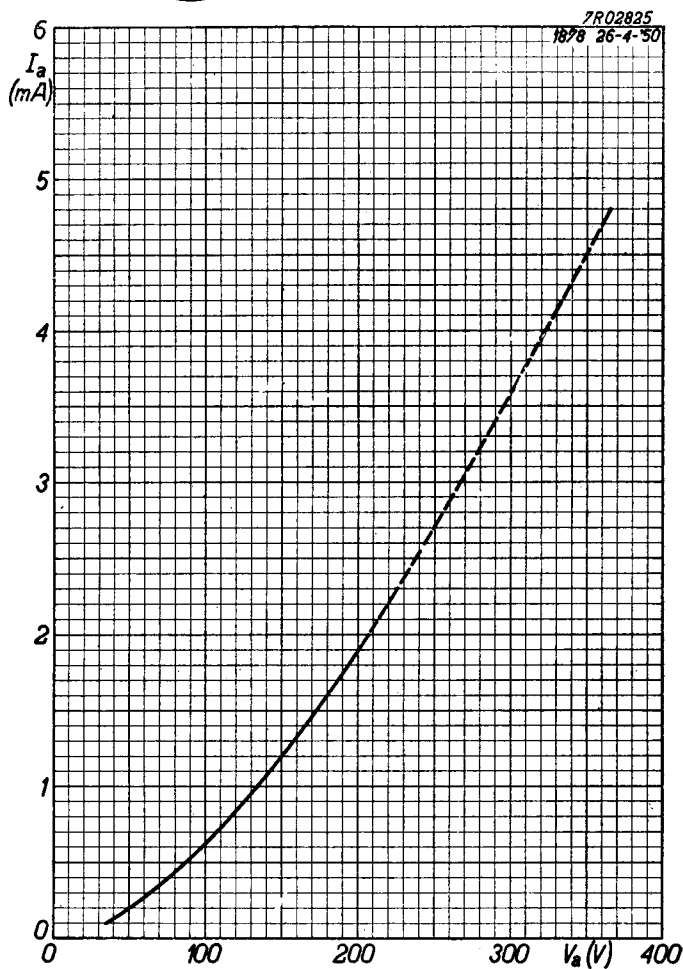



	1878	
page	sheet	date
1	1	1950.05.05
2	A	1950.05.05
3	FP	1999.09.11