

MAZDA

11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

11E3

RATING

Heater Voltage (volts)	V_h	4.2
Heater Current (amps)	I_h	2.5
Maximum Anode Voltage as Series Modulator (volts DC)	$V_a(\max)$	3,500
Maximum Peak Anode Voltage as Break Modulator (volts)	$V_a(pk)\max$	12,500
Maximum Screen Voltage (volts)	$V_{g2}(\max)$	700
Maximum Control Grid Negative Bias (volts-ve)	$V_{g1}(\max)$	-700
Maximum Peak Cathode Current (amps)	$I_k(pk)\max$	† 3.5
Inner μ	μ_{g1-g2}	† 9.0
Maximum Anode Dissipation (watts)	$W_a(\max)$	10.0
Maximum Screen Dissipation as Series Modulator (watts)	$W_{g2}(\max)Series$	0.9
Maximum Screen Dissipation as Break Modulator (watts)	$W_{g2}(\max)Break$	2.0
Maximum Potential Heater/Cathode (volts DC)	$V_h-k(\max)$	150

† Taken under Pulse Conditions of approximately 10 micro-seconds duration and 400:1 minimum off-on ratio.

: Taken at $V_a = 200$; $V_{g2} = 200$; $I_a = 40$ mA

INTER-ELECTRODE CAPACITANCES

Anode/Earth (μF)	C_{out}	7.5
Anode/Control Grid (μF)	C_{a-g1}	0.26
Control Grid/Earth (μF)	C_{in}	20

"Earth" denotes the remaining earthy potential electrodes and heater joined to cathode.

DIMENSIONS

Maximum Overall Length (mm)	140
Maximum Diameter (mm)	54
Maximum Seated Height (mm)	125
Approximate Nett Weight (ozs)	2½
Approximate Packed Weight (ozs)	7

MOUNTING POSITION Vertical

NOTE

This valve is intended for use as a break or series modulator with a short duration pulse input signal. When the equipment may be subjected to reduced atmospheric pressures the peak voltage between the control grid and Screen grid should not exceed 1,200 volts.

MAZDA

11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification


TYPICAL OPERATION

		<u>Series Modulator</u>	<u>Break Modulator</u>
Quiescent Anode Voltage (volts)	$V_a(o)$	3,500	500
Screen Voltage (volts)	V_{g2}	500	500
Signal Voltage Positive (volts)		50	25
Peak Anode Current (amps)	$I_a(pk)$	2	1
Approximate Knee Voltage (volts)		200	
Peak Anode Output Voltage (volts)		3,300	10,000
Approximate Peak Grid Current (amps)	$I_{g1}(pk)$	0.12	0.05

CAP BVA Standard

BULB Clear

BASE British 7 Pin.



Viewed from free end of pins.

CONNEXIONS

Pin 1	Blank
Pin 2	Control Grid
Pin 3	Blank
Pin 4	Heater
Pin 5	Heater
Pin 6	Cathode
Pin 7	Screen Grid
Top Cap	Anode

-
g1
-
h
h
k
g2
a

MAZDA


11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

11E3

AVERAGE CHARACTERISTIC CURVES

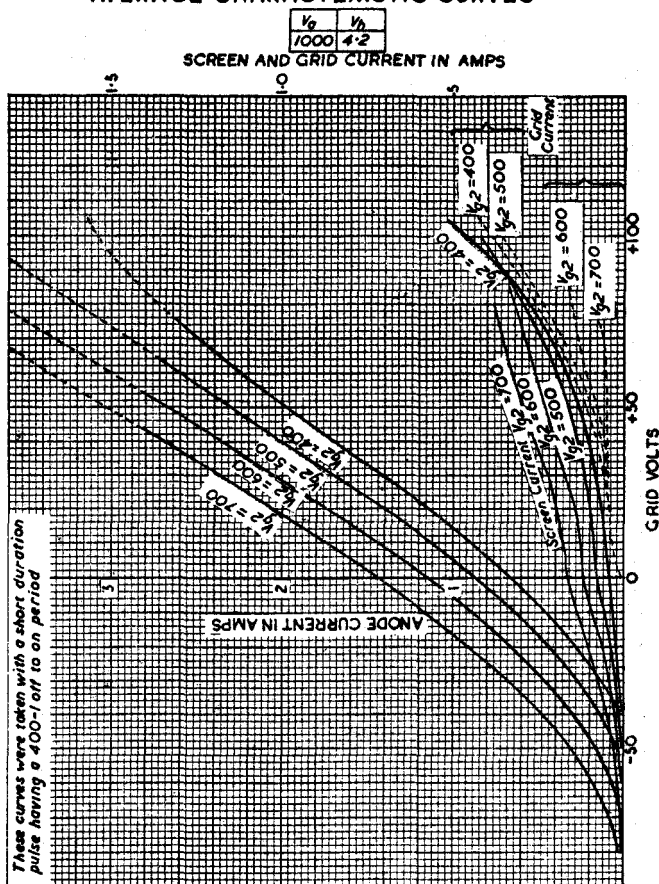

11E3


MAZDA

11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

AVERAGE CHARACTERISTIC CURVES

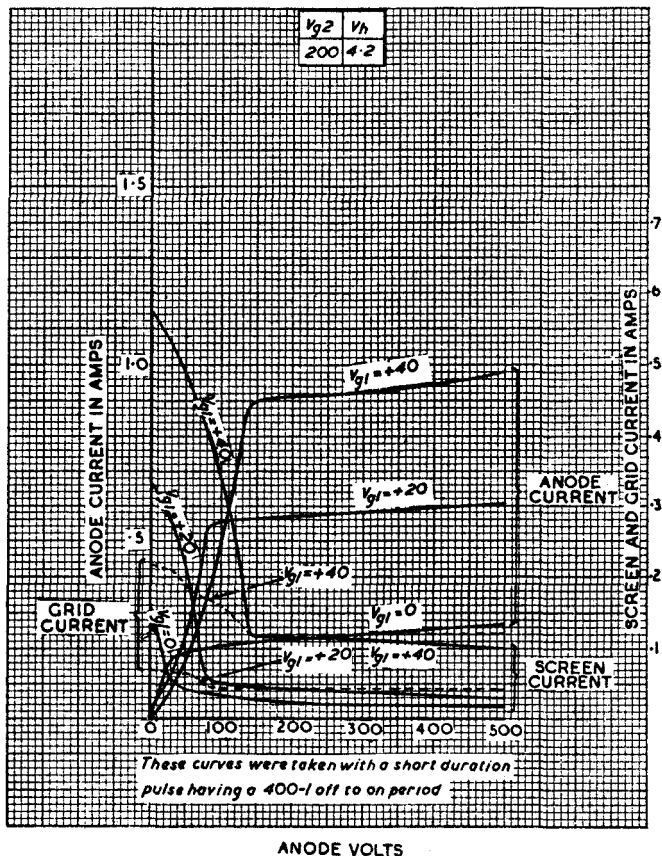

MAZDA


11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

AVERAGE CHARACTERISTIC CURVES

V_{g2}	V_h
500	4.2

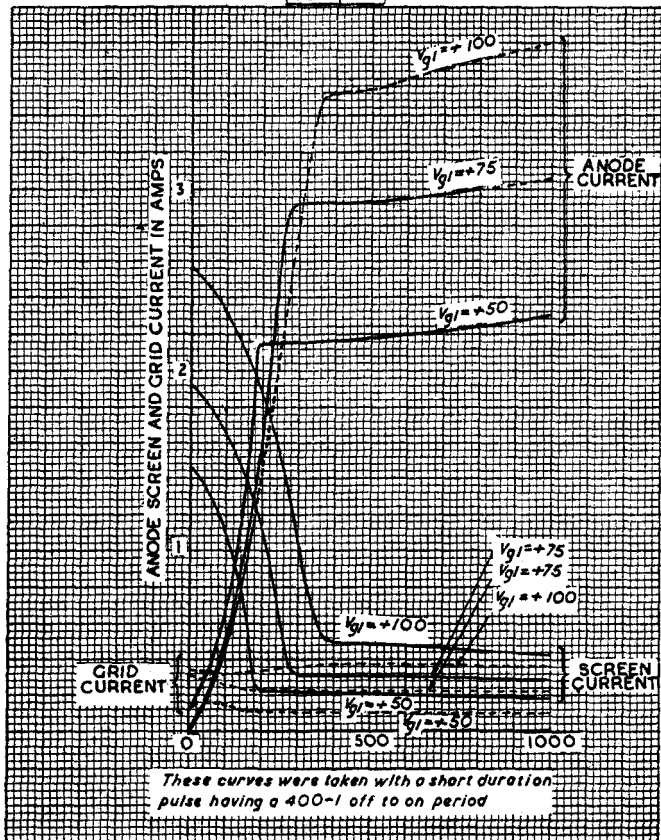

ANODE VOLTS

11E3

MAZDA

11E3

BEAM POWER AMPLIFIER

Indirectly heated—for Pulse Amplification

AVERAGE CHARACTERISTIC CURVES

V_{g2}	V_h
700	4.2

