

REMOTE - CUTOFF PENTODE TYPES 3BA6, 6BA6 AND 12BA6

The 3BA6, 6BA6 and 12BA6 are 7-pin miniature receiving tubes used as rf amplifiers in ac/dc standard broadcast receivers, in FM receivers, and in wide-band high-frequency applications. The low grid-1-to-plate capacitance minimizes regeneration, and they have high transconductance.

The 3BA6 has been designed for use in receivers which employ series-connected heaters, especially in television receivers where the picture-tube heater is in series with other heaters. When it is employed in this type of circuit with other tubes having a heater current rating of 600 ma., heater voltage surges across individual tubes are minimized inasmuch as the heater warm-up characteristic is controlled.

ELECTRICAL:

Cathode.....	Coated Unipotential		
Heater:	3BA6	6BA6	12BA6
Voltage (ac or dc)	3.15	6.3	12.6
Current	0.60	0.30	0.15
Warm-up Time (Approx.) Δ	11	--	--
Seconds			
Direct Interelectrode Capacitances: (Unshielded):			
Grid to Plate	0.0035	max.	$\mu\mu\text{f}$
Input.....	5.5	$\mu\mu\text{f}$	
Output.....	5.0	$\mu\mu\text{f}$	

MECHANICAL:

Bulb.....	T-5- $\frac{1}{2}$
Base.....	JEDEC E7-1, Small Button 7-Pin
Basing.....	7BK
Mounting Position	Any

MAXIMUM RATINGS:

Design Maximum Values

Plate Voltage	330	max.	Volts
Grid 2 (Screen) Supply Voltage	330	max.	Volts
Grid 2 Voltage.....	See Grid 2 Input		
Grid 1 (Control Grid) Voltage:	Rating Chart		
Negative Bias Value	55	max.	Volts
Positive Bias Value.....	0	max.	Volts
Plate Dissipation.....	3.4	max.	Watts
Grid 2 Dissipation	0.6	max.	Watts


Heater-Cathode Voltage:

Heater Negative with Respect to Cathode			
Total DC + Peak	200	200	max. Volts
Heater Positive with Respect to Cathode			
DC Component.....	100	100	max. Volts
Total DC + Peak	200	200	max. Volts


CHARACTERISTICS AND TYPICAL OPERATION:

Plate Voltage	100	250	Volts
Grid 2 Voltage.....	100	100	Volts
Grid 3 (Suppressor) Voltage	Connected to Cathode at Socket		
Cathode-Bias Resistor	68	68	Ohms
Plate Resistance (Approx.)	0.25	1.0	Megohms
Transconductance	4300	4400	μmhos
Grid 1 Bias (Approx.) for			
transconductance of 40 μmhos	-20	-20	Volts
Plate Current	10.8	11	Ma.
Grid 2 Current.....	4.4	4.2	Ma.


Δ Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times rated heater voltage divided by rated heater current.

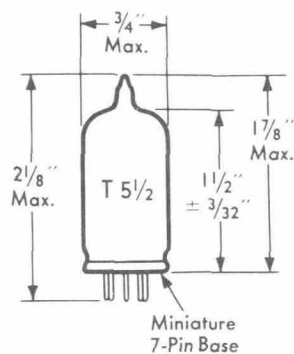


Miniature
7-Pin Base




AVERAGE CHARACTERISTICS
Pentode Connection

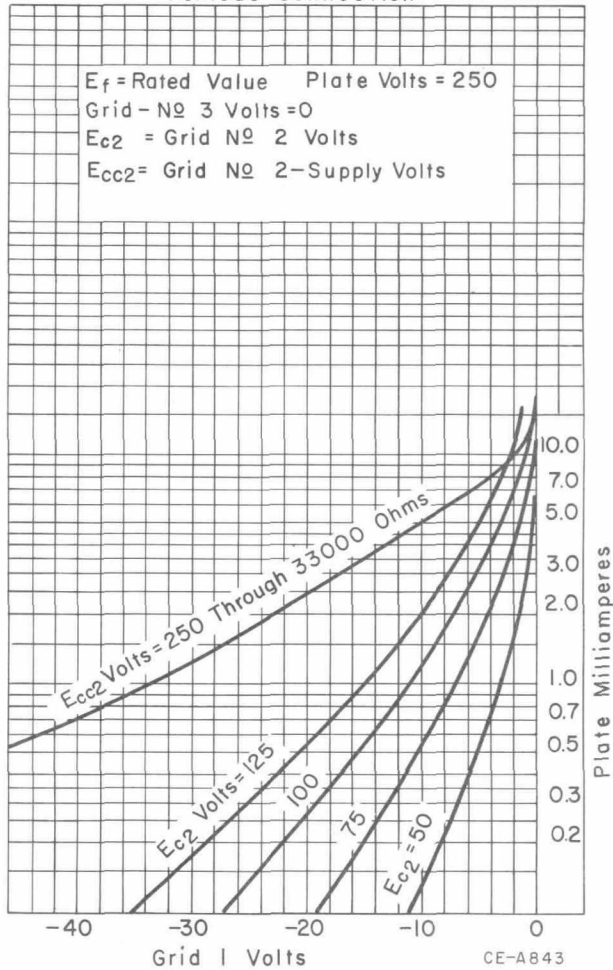


AVERAGE CHARACTERISTICS
Pentode Connection

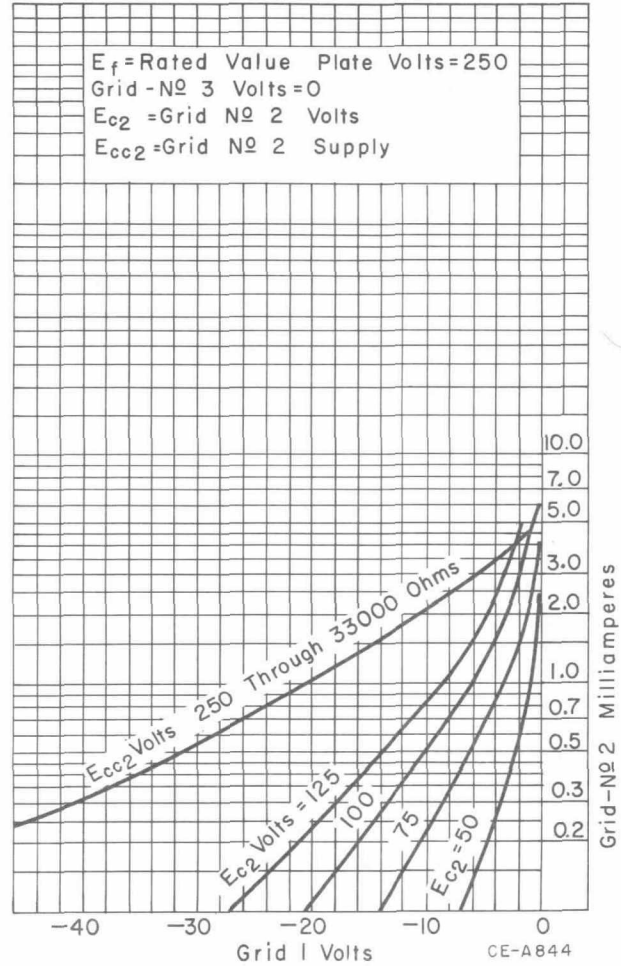


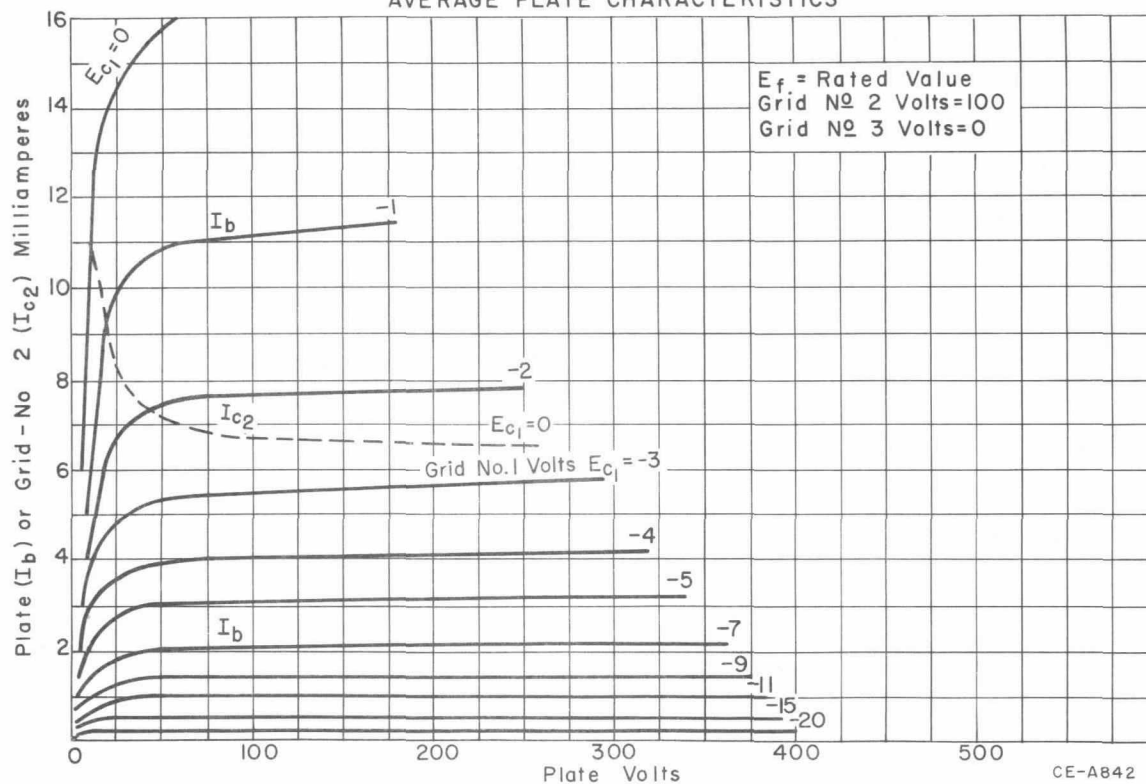

AVERAGE CHARACTERISTICS Pentode Connection

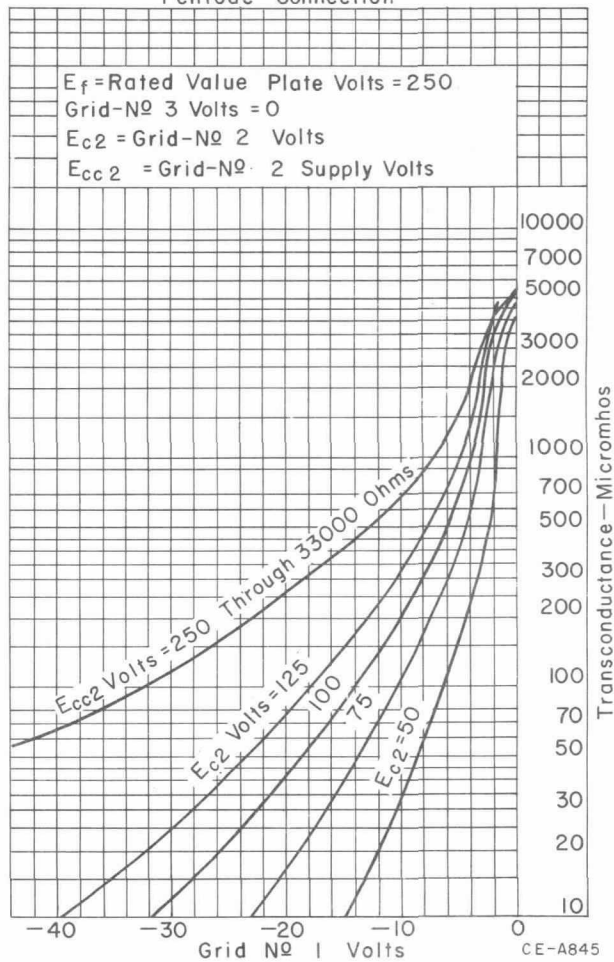

Grid 2 Input Rating

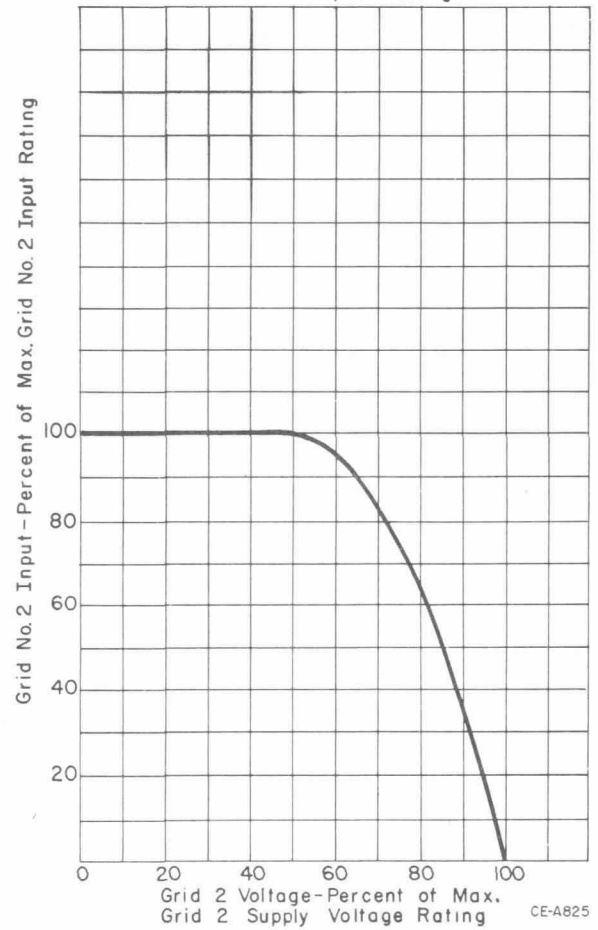

The information contained herein is supplied without assuming responsibility for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Westinghouse Electric Corporation.