

Picture Tube

RECTANGULAR GLASS TYPE
LOW-VOLTAGE ELECTROSTATIC FOCUS

ALUMINIZED SCREEN
MAGNETIC DEFLECTION

With Heater Having Controlled Warm-Up Time

GENERAL DATA

Electrical:

Heater Current at 6.3 volts.	600 ± 30	ma
Heater Warm-Up Time (Average).	11	seconds
Focusing Method.	Electrostatic	
Deflection Method.	Magnetic	
Deflection Angles (Approx.):		
Diagonal	114°	
Horizontal	102°	
Vertical	85°	
Direct Interelectrode Capacitances:		
Grid No.1 to all other electrodes.	6	μuf
Cathode to all other electrodes.	5	μuf
External conductive coating to ultor.	{1500 max.	μuf
	{1000 min.	μuf
Electron Gun	Type Requiring No Ion-Trap Magnet	

Optical:

Faceplate.	Filterglass	
Light transmission at center (Approx.)	78%	
Phosphor (For curves, see front of this section)	P4—Sulfide Type	
	Aluminized	
Fluorescence	White	
Phosphorescence.	White	
Persistence.	Medium Short	

Mechanical:

Tube Dimensions:

Overall length	11-3/8" ± 1/4"
Greatest width	16-13/32" ± 1/8"
Greatest height.	13-11/32" ± 1/8"
Diagonal	18-5/8" ± 1/8"
Neck length.	4-1/8" ± 1/8"
Curvature of faceplate (External Radii):	
Center	48"
Edge	21"
Screen Dimensions (Minimum):	
Greatest width	15-1/8"
Greatest height.	12"
Diagonal	17-9/16"
Projected area	172 sq. in.
Weight (Approx.)	14 lbs
Operating Position	Any
Cap.	Recessed Small Cavity (JEDEC No. J1-21)
Bulb	J149A1




19AVP4

Base. Small-Button Neoeightar 7-Pin, Arrangement 1,
(JEDEC No. B7-208)

Basing Designation for BOTTOM VIEW. 8HR

Pin 1-Heater
Pin 2-Grid No.1
Pin 3-Grid No.2
Pin 4-Grid No.4
Pin 6-Grid No.1
Pin 7-Cathode
Pin 8-Heater



Cap-Ultor
(Grid No.3,
Grid No.5,
Collector)
C-External
Conductive
Coating

GRID-DRIVE^A SERVICE

*Unless otherwise specified, voltage values
are positive with respect to cathode*

Maximum and Minimum Ratings, Design-Maximum Values:

ULTOR VOLTAGE	{ 23000 max.	volts
	{ 15000 min.	volts

GRID-No.4 (FOCUSING) VOLTAGE:

Positive value.	1100 max.	volts
Negative value.	550 max.	volts

GRID-No.2 VOLTAGE	{ 550 max.	volts
	{ 200 min.	volts

GRID-No.1 VOLTAGE:

Negative-peak value	220 max.	volts
Negative-bias value	154 max.	volts
Positive-bias value	0 max.	volts
Positive-peak value	2 max.	volts

HEATER VOLTAGE.	{ 6.9 max.	volts
	{ 5.7 min.	volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode:

During equipment warm-up period		
not exceeding 15 seconds.	450 max.	volts

After equipment warm-up period.	200 max.	volts
---	----------	-------

Heater positive with respect to cathode.	200 max.	volts
--	----------	-------

Typical Operating Conditions:

With ultor voltage (E_{c5k}) of	20000	volts
and grid-No.2 voltage (E_{c2k}) of	400	volts

Grid-No.4 Voltage for focus ^B	0 to 400	volts
--	----------	-------

Grid-No.1 Voltage for visual extinction of focused raster ^A	-36 to -94	volts
---	------------	-------

Field Strength of Adjustable Centering Magnet ^A	0 to 9	gausses
---	--------	---------

Maximum Circuit Values:

Grid-No.1-Circuit Resistance.	1.5 max.	megohms
---------------------------------------	----------	---------



CATHODE-DRIVE^Δ SERVICE

Unless otherwise specified, voltage values
are positive with respect to grid No.1

Maximum and Minimum Ratings, Design-Maximum Values:

ULTOR-TO-GRID-No.1 VOLTAGE.	{ 23000 max. 15000 min.	volts volts
GRID-No.4-TO-GRID-No.1 (FOCUSING) VOLTAGE:		
Positive value.	1250 max.	volts
Negative value.	400 max.	volts
GRID-No.2-TO-GRID-No.1 VOLTAGE.	{ 700 max. 350 min.	volts volts
GRID-No.2-TO-CATHODE VOLTAGE.	550 max.	volts
CATHODE-TO-GRID-No.1 VOLTAGE:		
Positive-peak value	220 max.	volts
Positive-bias value	154 max.	volts
Negative-bias value	0 max.	volts
Negative-peak value	2 max.	volts
HEATER VOLTAGE.	{ 6.9 max. 5.7 min.	volts volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode:		
During equipment warm-up period not exceeding 15 seconds.	450 max.	volts
After equipment warm-up period. . .	200 max.	volts
Heater positive with respect to cathode.	200 max.	volts

Typical Operating Conditions:

With ultor-to-grid-No.1 voltage (E_{c5g1}) of	20000	volts
and grid-No.2-to-grid-No.1 voltage (E_{c2g1}) of	400	volts
Grid-No.4-to-Grid-No.1 Voltage for focus [●]	0 to 400	volts
Cathode-to-Grid-No.1 Voltage for visual extinction of focused raster [▲]	36 to 78	volts
Field Strength of Adjustable Centering Magnet [◆]	0 to 9	gausses

Maximum Circuit Values:

Grid-No.1-Circuit Resistance.	1.5 max.	megohms
---------------------------------------	----------	---------

▲ Grid drive is the operating condition in which the video signal varies the grid-No.1 potential with respect to cathode.

● The grid-No.4 (or grid-No.4-to-grid-No.1) voltage required for optimum focus of any individual tube will have a value anywhere between 0 and 400 volts, is independent of ultor current and will remain essentially constant for values of ultor (or ultor-to-grid-No.1) voltage or grid-No.2 (or grid-No.2-to-grid-No.1) voltage within design-maximum ratings shown for these items.

* See Raster-Cutoff-Range Chart for Grid-Drive Service.

◆ Distance from Reference Line for suitable PM centering magnet should not exceed 2-1/4". The specified centering magnet compensates only for the effect which mechanical tube tolerances may have on the location of the undeflected focused spot with respect to the center of the tube face. Maximum field strength of adjustable centering magnet equals:



19AVP4

$$\sqrt{\frac{E_{c5k} \text{ or } E_{c5g1} \text{ (volts)}}{16000 \text{ (volts)}}} \times 8 \text{ gaussess}$$

The equipment manufacturer must determine and supply additional compensation for the effects of the earth's magnetic field and extraneous fields due to choice of circuitry and components. The additional compensation should preferably be applied as part of the magnetic field of the deflecting yoke.


- ◆ Cathode drive is the operating condition in which the video signal varies the cathode potential with respect to grid No.1 and the other electrodes.
- ◆ See *Raster-Cutoff-Range Chart for Cathode-Drive Service.*

OPERATING CONSIDERATIONS

X-Ray Warning. When operated at ultor voltages up to 16 kilovolts, this picture tube does not produce any harmful X-ray radiation. However, because the rating of this type permits operation at voltages as high as 23 kilovolts (Design-maximum value), shielding of this picture tube for X-ray radiation may be needed to protect against possible injury from prolonged exposure at close range whenever the operating conditions involve voltages in excess of 16 kilovolts.


Shatter-Proof Cover Over the Tube Face. Following conventional picture tube practice, it is recommended that the cabinet be provided with a shatterproof, glass cover over the face of this picture tube to protect it from being struck accidentally and to protect against possible damage resulting from tube implosion under some abnormal condition. This safety cover can also provide X-ray protection when required.

RASTER-CUTOFF-RANGE CHARTS Grid-Drive Service

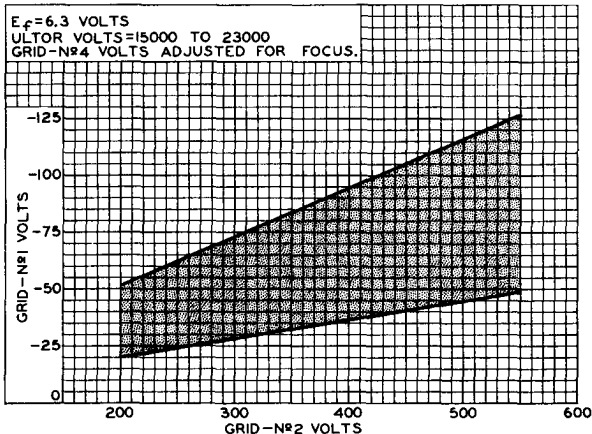

92CS-10790


Cathode-Drive Service

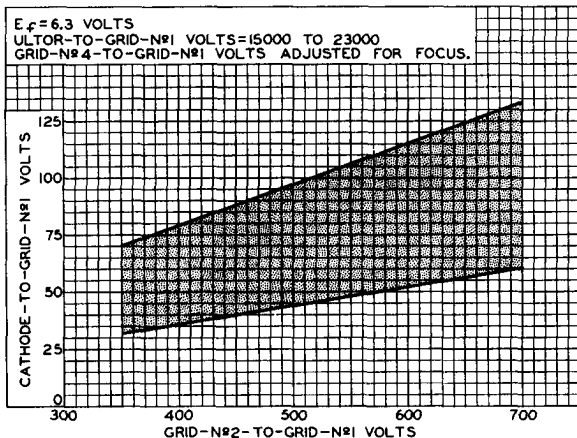

92CS-10819



19AVP4

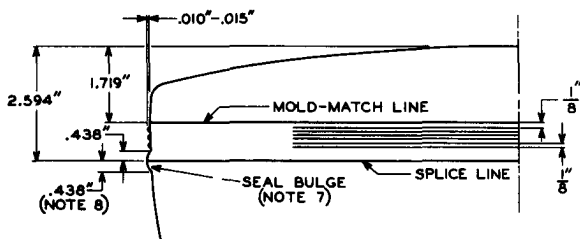

DETAIL OF PANEL

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND PIN 4 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ULTOR TERMINAL BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 30^\circ$. ULTOR TERMINAL IS ON SAME SIDE AS PIN 4.

NOTE 2: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE GAUGE JEDEC No. G-126 (SHOWN AT FRONT OF THIS SECTION) AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.

NOTE 3: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. THE DESIGN OF THE SOCKET SHOULD BE SUCH THAT THE CIRCUIT WIRING CANNOT IMPRESS LATERAL STRAINS THROUGH THE SOCKET CONTACTS ON THE BASE PINS. BOTTOM CIRCUMFERENCE OF BASE WAFER WILL FALL WITHIN A CIRCLE CONCENTRIC WITH BULB AXIS AND HAVING A DIAMETER OF 1-3/4".

NOTE 4: EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

NOTE 5: TO CLEAN THIS AREA, WIPE ONLY WITH SOFT DRY LINT-LESS CLOTH.


NOTE 6: MEASURED AT THE MOLD-MATCH LINE.

NOTE 7: BULGE AT SPLICE-LINE SEAL MAY INCREASE THE INDICATED MAXIMUM VALUE FOR ENVELOPE WIDTH, DIAGONAL, AND HEIGHT BY NOT MORE THAN 1/8", BUT AT ANY POINT AROUND THE SEAL, THE BULGE WILL NOT PROTRUDE MORE THAN 1/16" BEYOND THE ENVELOPE SURFACE AT THE MOLD-MATCH LINE.



NOTE 8: UNDISTURBED AREA BETWEEN MOLD-MATCH LINE AND SPLICE LINE IS 3/8" MINIMUM. THIS SHOULD BE THE MAXIMUM WIDTH OF THE TUBE SUPPORT BAND. TUBE MOUNTING AND YOKE SUPPORT CLAMPS MUST BE SPECED FROM THE TUBE BY USE OF CUSHIONING PADS MADE OF MATERIAL SUCH AS ASPHALT-IMPREGNATED FELT, OR EQUIVALENT.

BULB-CONTOUR DIMENSIONS

SHORT-SIDE VIEW



LONG-SIDE VIEW

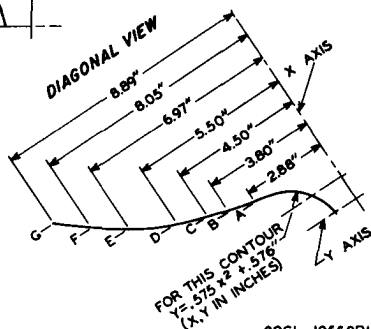

92CL-10669RI

NOTE: PLANES A THROUGH G ARE NORMAL TO THE TUBE AXIS AND AT FIXED LOCATIONS FROM THE Y AXIS. THESE COORDINATES DESCRIBE THE BOGIE-BULB EXTERNAL CONTOUR IN PLANES THROUGH THE TUBE AXIS AND THE RESPECTIVE FACEPLATE AXES.

