


TUNG-SOL

BEAM PENTODE

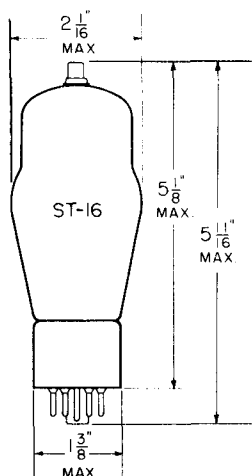

GLASS BULB
SMALL CAP


COATED UNIPOTENTIAL CATHODE

HEATER

18.9 VOLTS .300 AMPERE
AC OR DC

MOUNTING POSITION

VERTICAL - BASE UP OR
DOWN.
HORIZONTAL - PLANE OF
PINS 2&7 VERTICAL.



BOTTOM VIEW
MEDIUM SHELL
6 PIN OCTAL
58T

THE 19BG6G IS ESSENTIALLY A MECHANICAL REDESIGN OF TYPE 6L6G TO PERMIT OPERATION AS A HORIZONTAL DEFLECTION AMPLIFIER FOR TELEVISION SERVICE. IT USES A TOP CAP CONNECTION AND ADDITIONAL INSULATION FOR THE PLATE STRUCTURE TO WITHSTAND THE HIGH PEAK PLATE VOLTAGE ENCOUNTERED IN SUCH CIRCUITS.

DIRECT INTERELECTRODE CAPACITANCES

WITH NO EXTERNAL SHIELD

GRID TO PLATE: (G ₁ TO P) MAX.	0.65	μmf
INPUT: G ₁ TO (H+K&G ₃ +G ₂)	11	μmf
OUTPUT: P TO (H+K&G ₃ +G ₂)	6.5	μmf

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD WB-210

HEATER VOLTAGE	18.9	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	250	VOLTS
MAXIMUM DC PLATE VOLTAGE	500	VOLTS
MAXIMUM DC GRID #2 VOLTAGE ^A	350	VOLTS
MAXIMUM DC GRID #1 VOLTAGE	-50	VOLTS
MAXIMUM PLATE DISSIPATION	20	WATTS
MAXIMUM DC PLATE CURRENT	100	MA.
MAXIMUM PEAK POSITIVE SURGE PLATE VOLTAGE ^B	6 000	VOLTS
MAXIMUM PEAK NEGATIVE SURGE GRID #1 VOLTAGE	-400	VOLTS
MAXIMUM GRID #2 DISSIPATION	3.2	WATTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE	1	MEGOHM

^A PREFERABLY OBTAINED FROM PLATE-VOLTAGE SUPPLY THROUGH A SERIES DROPPING RESISTOR OF SUFFICIENT MAGNITUDE TO LIMIT THE GRID #2 INPUT TO THE RATED MAXIMUM VALUE FOR WIDE VARIATION IN GRID #2 CURRENT.

^B THE DUTY CYCLE OF THE VOLTAGE PULSE MUST NOT EXCEED 15% OF ONE SCANNING CYCLE AND ITS DURATION MUST BE LIMITED TO TEN MICROSECONDS.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

HORIZONTAL DEFLECTION CIRCUIT

HEATER VOLTAGE	18.9	VOLTS
HEATER CURRENT	300	AMP.
PLATE & GRID #2 SUPPLY VOLTAGE	400	VOLTS
PEAK POSITIVE SURGE PLATE VOLTAGE (APPROX.)	4 000	VOLTS
PEAK NEGATIVE SURGE GRID #1 VOLTAGE (APPROX.)	-100	VOLTS
PLATE CURRENT	70	MA.
GRID #2 CURRENT	6	MA.
GRID #1 CURRENT	25	UAMP

PLATE
2172APR. 1,
1949

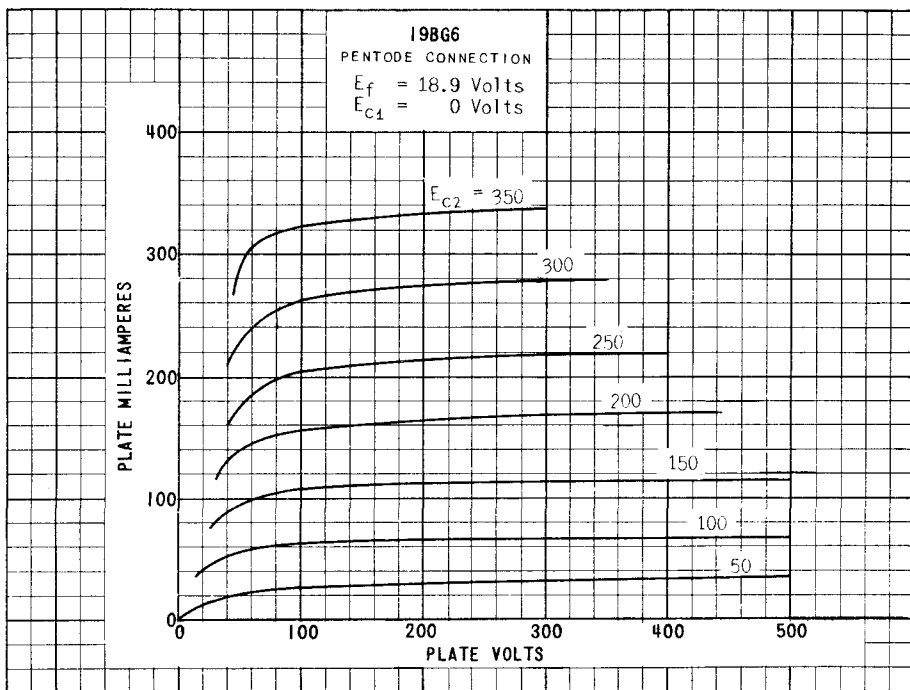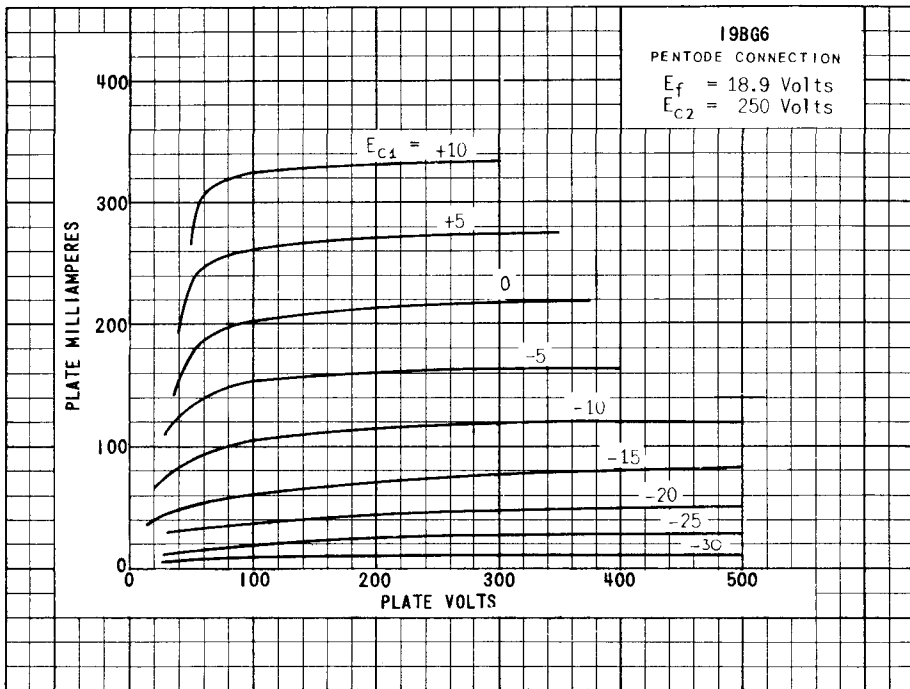

PRINTED IN U. S. A.

PLATE
2173
APR. 1,
1949

19BG6G

