



engineering data service

SYLVANIA
19BNP4,
19BQP4

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (Approx.)	
Horizontal	102 Degrees
Diagonal	114 Degrees
Vertical	86 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Bonded Shield
(Gray Filter Glass Safety Plate Laminated Directly to Face of Tube)	
Light Transmittance of Faceplate Assembly (Approx.)	44 Percent
19BQP4: External Surface of Safety Plate Treated to Reduce Specular Reflection	

ELECTRICAL DATA



Heater Voltage	6.3 Volts	
Heater Current	$0.60 \pm 5\%$ Ampere	
Heater Warm-up Time ¹	11 Seconds	
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes	$5 \mu\text{f}$	
Grid No. 1 to All Other Electrodes	$6 \mu\text{f}$	
External Conductive Coating to Anode ²	$1500 \mu\text{f}$	Max.
	$1000 \mu\text{f}$	Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	
Height	$12\frac{1}{16}$ Inches
Width	$15\frac{1}{4}$ Inches
Diagonal	$17\frac{5}{8}$ Inches
Area	172 Sq. Inches
Neck Length	$5\frac{1}{8} \pm \frac{1}{8}$ Inches
Overall Length	$12\frac{5}{8} \pm \frac{5}{16}$ Inches
Bulb	J149C
Safety Plate	
19BNP4	FP159A
19BQP4	FP159B
Bulb Contact	
(Recessed Small Cavity Cap)	J1-21
Base	B7-208
Basing	8HR
Weight (Approx.)	$18\frac{1}{2}$ Pounds

QUICK REFERENCE DATA

Television Picture Tube
19" Direct Viewed
Rectangular Glass Type
Spherical Faceplate
Bonded Shield
Gray Filter Glass
Aluminized Screen
Electrostatic Focus
114° Magnetic Deflection
External Conductive Coating
19BQP4: Anti-Reflection
Treated



SYLVANIA ELECTRONIC TUBES

A Division of
Sylvania Electric Products Inc.

PICTURE TUBE OPERATIONS

SENECA FALLS, NEW YORK

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

MAY, 1962

PAGE 1 OF 3

File Under

TELEVISION PICTURE TUBES

RATINGS

MAXIMUM RATINGS (Design Maximum Values) Cathode Drive Service³

Maximum Anode Voltage	20,000 Volts	dc
Minimum Anode Voltage	12,000 Volts	dc
Grid No. 4 Voltage (Focusing Electrode)	-550 to +1100 Volts	dc
Grid No. 2 Voltage	70 Volts	dc
Cathode Voltage		
Negative Bias Value	0 Volts	dc
Negative Peak Value	2 Volts	
Positive Bias Value	155 Volts	dc
Positive Peak Value	220 Volts	
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode		
During Warm-up Period Not to Exceed 15 Seconds	450 Volts	
After Equipment Warm-up Period	200 Volts	
Heater Positive with Respect to Cathode	200 Volts	

TYPICAL OPERATING CONDITIONS, Cathode Drive Service³

Anode Voltage	16,000 Volts	dc
Grid No. 4 Voltage for Focus	0 to +400 Volts	ds
Grid No. 2 Voltage	50 Volts	dc
Cathode Voltage Required for Cutoff ⁴	+32 to +50 Volts	dc

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
---	------------------


NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80 % of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Voltages are positive with respect to Grid No. 1 Voltage, unless otherwise indicated.
4. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more positive.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

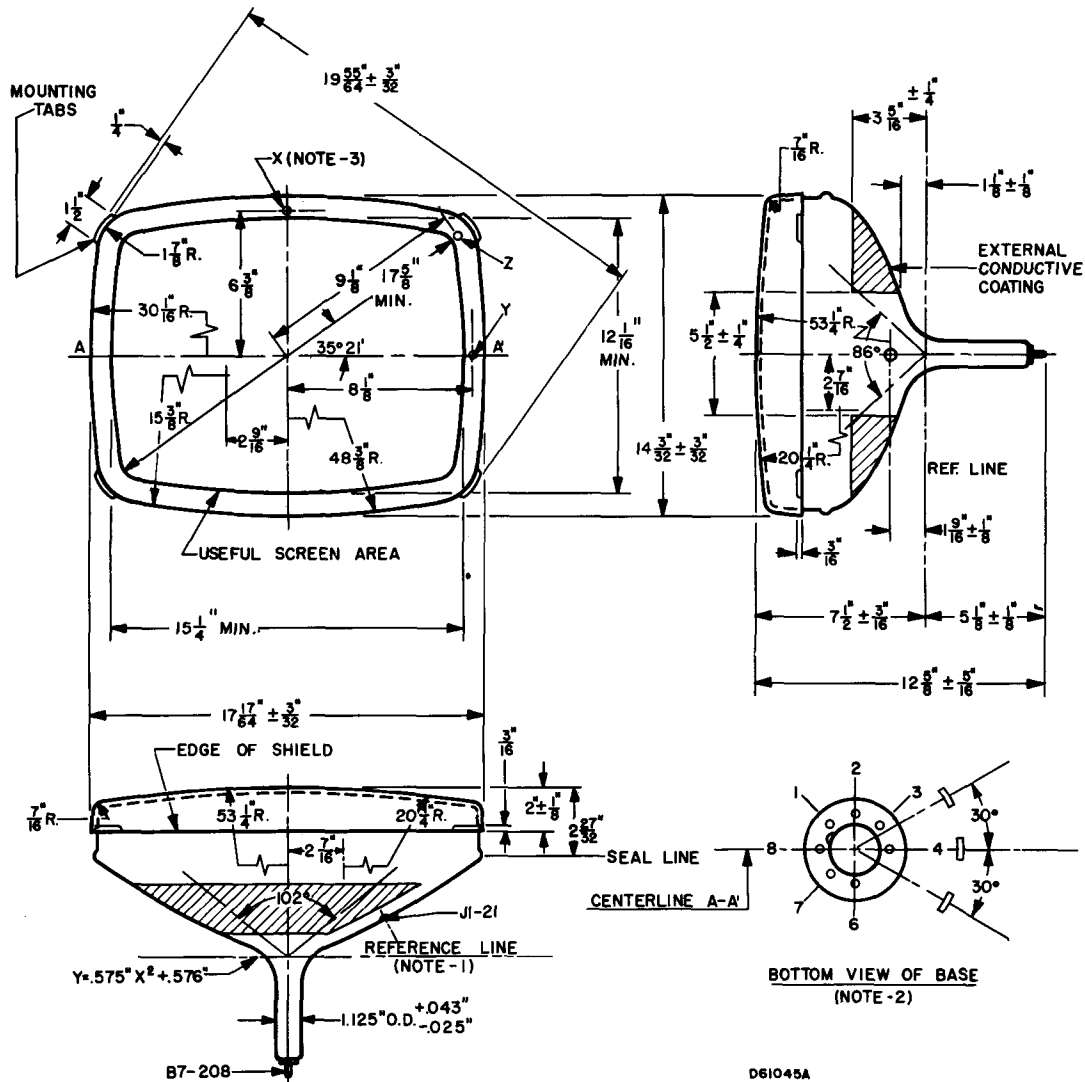

D61045A

DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JEDEC No. 126 Reference Line Gauge, when the gauge is seated against the bulb.
2. Base Pin No. 4 aligns with horizontal centerline (A-A') within 30° and is on same side as anode contact, J1-21.
3. Planes perpendicular to tube axis and passing through Points X, Y, and Z are located as follows:
 - Plane tangent to crown of face to plane of X: $0.531''$ Nominal
 - Plane of X to plane of Y = $.421'' \pm .025''$
 - Plane of X to plane of Z = $.738'' \pm .045''$