



1966

HIGH VACUUM HALF WAVE RECTIFIER

Indirectly heated—for High Voltage Power Supplies

RATING

Heater Voltage	V_h	4.0 V
Heater Current	I_h	0.5 A
Maximum Peak Inverse Anode Voltage (Wkg)	P.I.V _{max(w)}	6.0 kV
Maximum Peak Inverse Anode Voltage (no-load)	P.I.V _(max)	7.0 kV
Maximum Anode Voltage (r.m.s.)	$V_a(\text{rms})_{\text{max}}$	2.5 kV
Maximum Mean Anode Current	$I_a(\text{av})_{\text{max}}$	30.0 mA
Maximum Peak Anode Current	$I_a(\text{pk})_{\text{max}}$	180.0 mA
Minimum Surge Limiting Resistance		5,400* Ω
Maximum Reservoir Capacitance	C_{max}	1.0 μF

* This resistance can be obtained in the distributed resistance of the transformer winding.

INTER-ELECTRODE CAPACITANCES (pF)

Anode to all other electrodes	$C_{a-\text{all}}$	2.8
-------------------------------	--------------------	-----

DIMENSIONS


Maximum Overall Length	60 mm
Maximum Diameter	19 mm
Approximate Nett Weight	$\frac{1}{4}$ oz
Approximate Packed Weight	$\frac{1}{2}$ oz

MOUNTING POSITION—Unrestricted

19G6
HIGH VACUUM HALF WAVE RECTIFIER
 Indirectly heated—for High Voltage Power Supplies

CAP—CT1

BASE—Miniature Button 7-Pin (B7G.)



Viewed from free end of pins.

BASE CONNECTIONS

Pin 1	IC to Pin 2	IC
Pin 2	Cathode	k
Pin 3	Heater	h
Pin 4	Heater	h
Pin 5	IC to Pin 2	IC
Pin 6	IC to Pin 2	IC
Pin 7	IC to Pin 2	IC
Cap	Anode	a

NOTES


Cathode and Heater should normally be tied externally. If left free, the heater to cathode voltage must never exceed 10 volts Peak.

The heater must be switched on for 20 seconds before the anode voltage is applied.

All Maximum Ratings are absolute values not design centres.

19G6
HIGH VACUUM HALF WAVE RECTIFIER
Indirectly heated—for High Voltage Power Supplies

AVERAGE CHARACTERISTIC CURVES : $I_a, R_a/V_a$

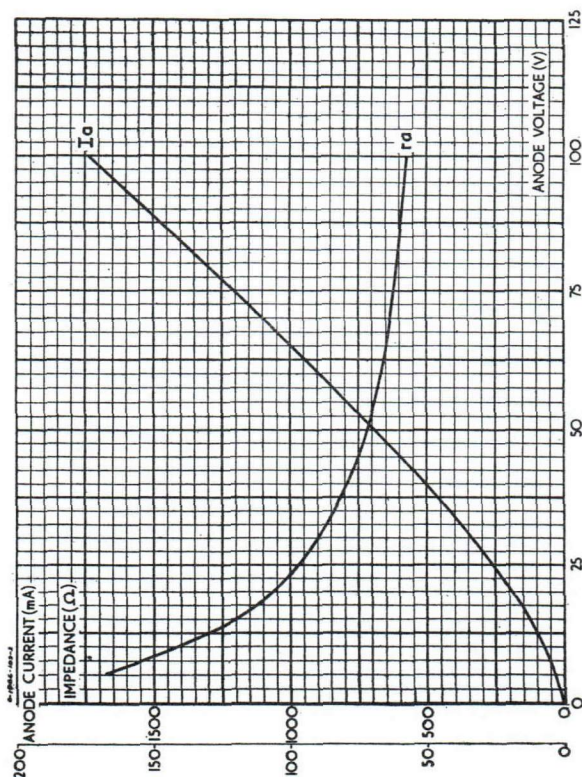



1906
HIGH VOLTAGE HALF WAVE RECTIFIER
Designed for use in High Voltage Power Supply

Average Characteristic Curves: P_{avg} vs. V_{avg}

