

TELEVISION DAMPING DIODE TYPES 6AX4-GT, 6AX4-GTB, 12AX4-GTA, 17AX4-GT AND 25AX4-GT

The 6AX4-GT, 6AX4-GTB, 12AX4-GTA, 17AX4-GT and 25AX4-GT are 6-pin octal indirectly-heated half-wave rectifiers designed for service as the damping diode in horizontal deflection circuits of television receivers.

The 12AX4-GTA and 17AX4-GT have been designed for use in receivers which employ series connected heaters, especially in television receivers where the picture-tube heater is in series with other heaters. When each is employed in this type of circuit with other tubes similarly designed having the same heater current rating, voltage surges across individual tubes are minimized inasmuch as heater warm-up characteristic is controlled.


ELECTRICAL:

Cathode.....Unipotential
Heater: 6AX4-GT 12AX4-GTA 17AX4-GT 25AX4-GT
6AX4-GTB


Voltage (ac or dc)	6.3	12.6	16.8	25.0
Current	1.2	0.60	0.45	0.30
Warm-up Time [⊕]	--	11	11	--
Direct Interelectrode Capacitances:				
Heater to Cathode	4.0	$\mu\mu\text{f}$		
Plate to Cathode and Heater	5.0	$\mu\mu\text{f}$		
Cathode to Plate and Heater	8.5	$\mu\mu\text{f}$		

MECHANICAL:

Bulb.....T-9
Base.....Short Intermediate-Shell Octal
Basing.....4CG
Mounting Position.....Any

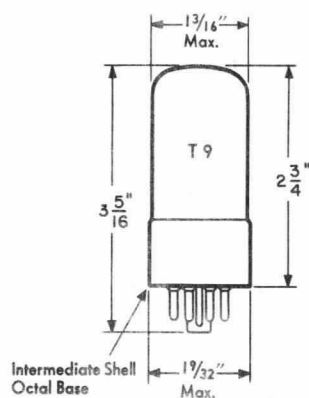

CE-A564



Pins 1, 2, 4, 6 must not be used as tie points.

MAXIMUM RATINGS:

TV DAMPER DIODE SERVICE ★

	Design	Center	Values
Design	Maximum	6AX4-GT	
Values	Values	12AX4-GTA	
		17AX4-GT	
	6AX4-GTB	25AX4-GT	
Peak Inverse Voltage	5000	4400 [♣]	max. Volts
Peak Plate Current	1000	750	max. Ma.
DC Plate Current	165	125	max. Ma.
Plate Dissipation	5.3	4.8	max. Watts
Heater-Cathode Voltage:			
Heater Negative with Respect to Cathode:			
DC Component	900	900	max. Volts
Total DC and Peak	5000	4400	max. Volts
Heater Positive with Respect to Cathode:			
DC Component	100	100	max. Volts
Total DC and Peak	300	300	max. Volts


CHARACTERISTIC:

Voltage Drop with Plate
Current of 250 Ma. 32 Volts

★ For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations, Federal Communications Commission". The duty of the horizontal voltage pulse not to exceed 15% of one scanning cycle. Operation as a power rectifier is not recommended.

⊕ Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three times rated heater voltage divided by rated heater current.

♣ Absolute Maximum Value.

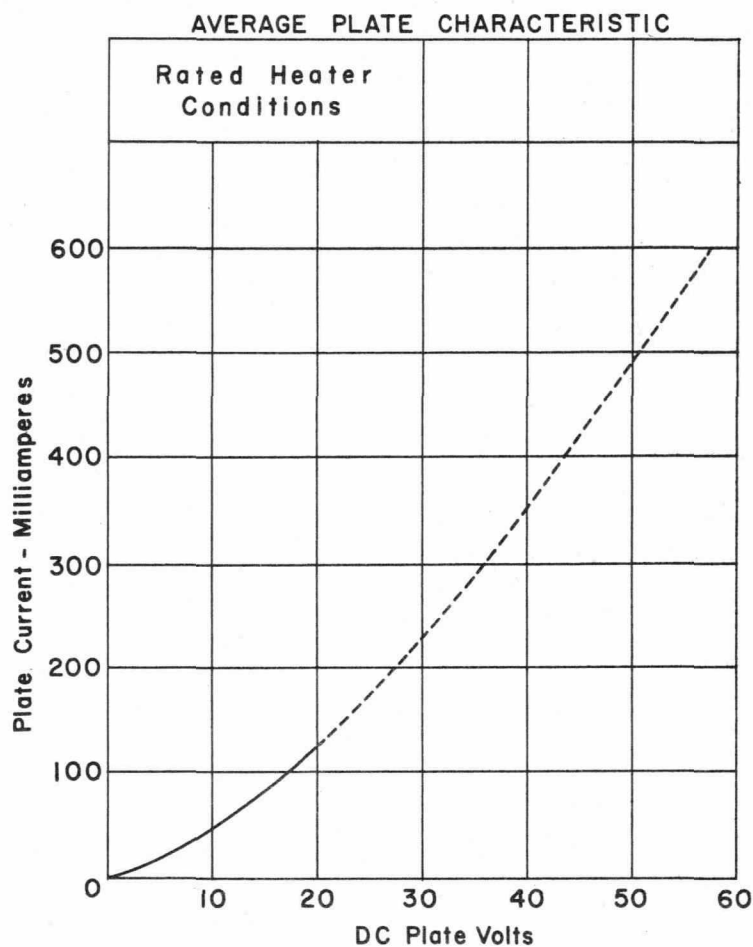

CE-A818 R1