

PHILIPS**19 Y 3****HALF-WAVE HIGH-VACUUM RECTIFIER**Physical Specifications

Cathode	Coated unipotential
Base	Small button noval 9-pin
Bulb	T6 $\frac{1}{2}$
Maximum overall length	3 $\frac{1}{16}$ "
Maximum seated height	2 $\frac{13}{16}$ "
Bulb length excluding tip	2 $\frac{7}{16}$ " $\pm$ $\frac{3}{32}$ "
Maximum diameter	$\frac{7}{8}$ "
Mounting position	any
Basing connections - JETEC basing designation	9BM

Pin 1 - Internally connected

Bottom view
of baseTube outline

Pin 2 - Internally connected

Pin 3 - Cathode

Pin 4 - Heater

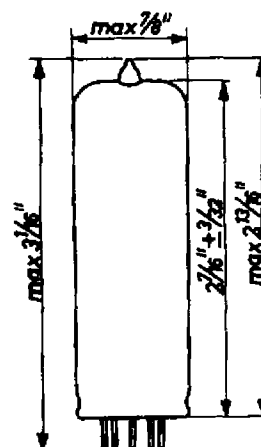

Pin 5 - Heater

Pin 6 - Internally connected

Pin 7 - Internally connected

Pin 8 - Internally connected

Pin 9 - Plate

General Electrical Data

Heater voltage	19 volts
Heater current	300 ma

Maximum Ratings

Peak inverse plate voltage	700 volts
D.C. output current	180 ma
Filter input capacitor	60 μ F ¹⁾
Heater-cathode voltage (peak value, cathode positive with respect to heater)	550 volts
D.C. component of heater-cathode voltage	250 volts

6.6.1951

1.

N.V. PHILIPS' GLOEILAMPENFABRIEKEN, Eindhoven, Holland.

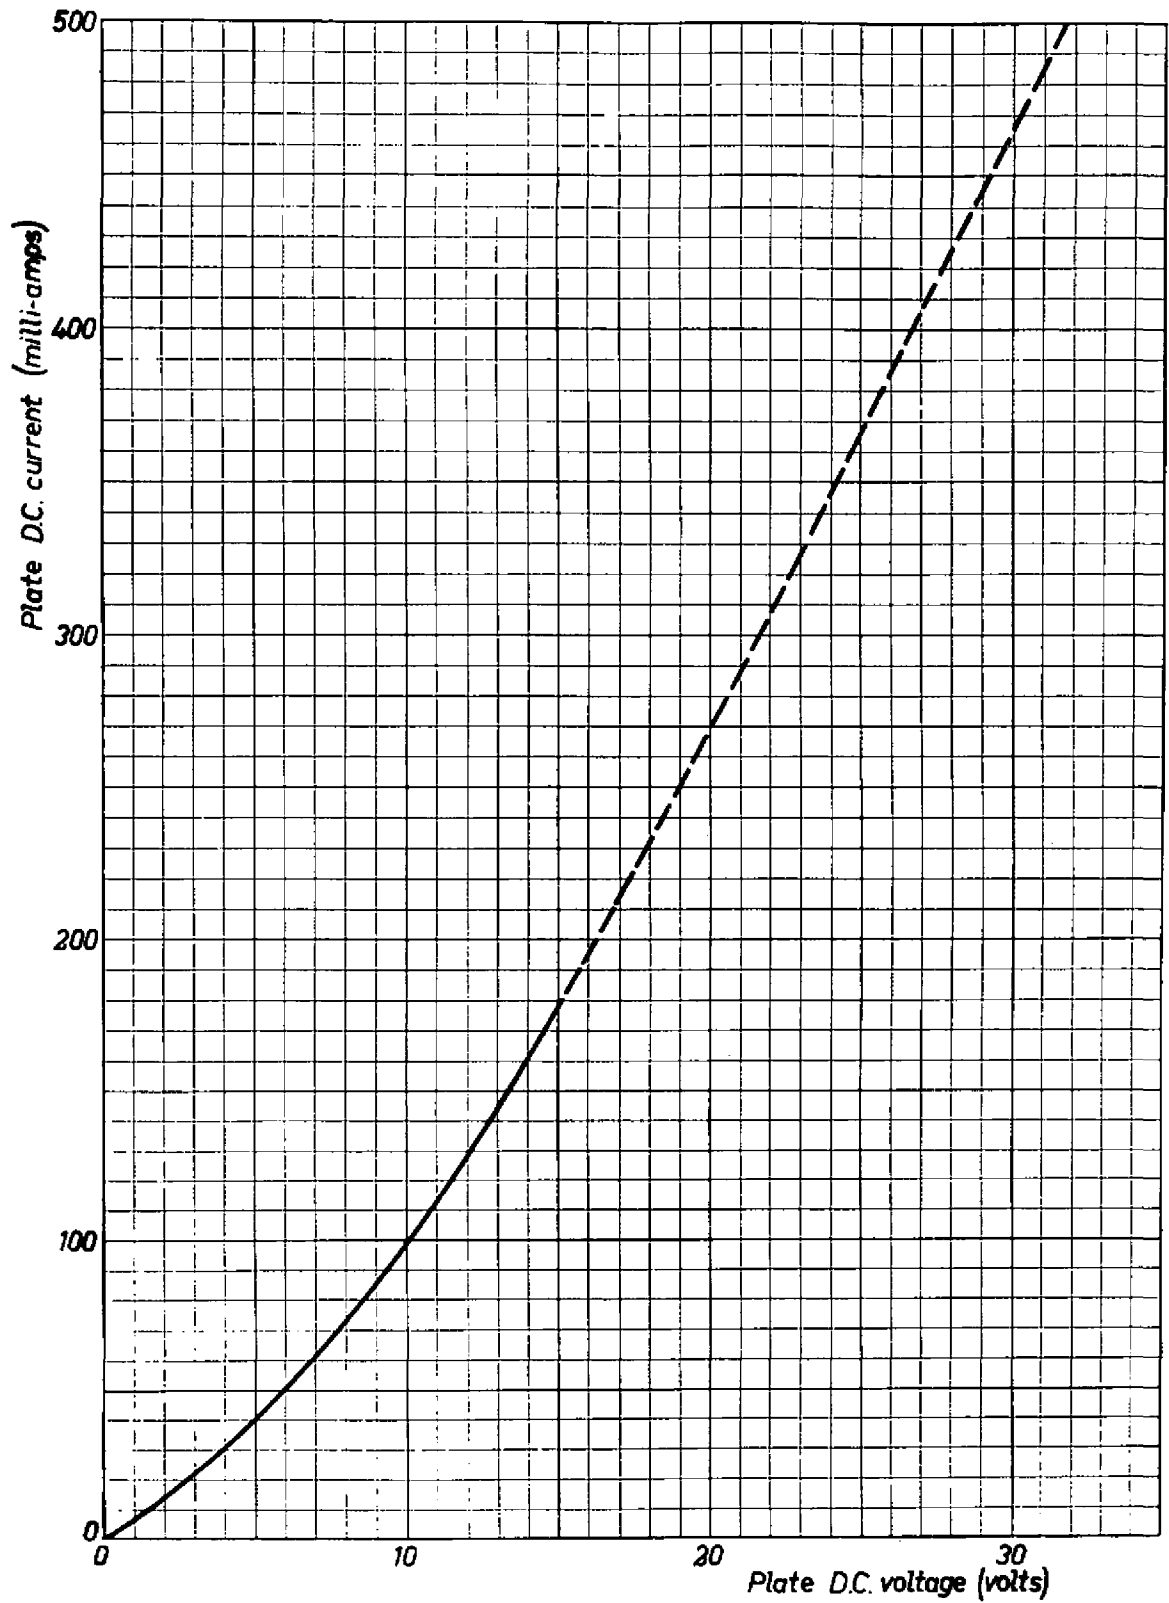
Maximum Ratings (continued)

A.C.component of heater-cathode voltage	220 volts					(rms)
A.C. input voltage	250	240	220	200	127	volts (rms)
Total effective plate supply impedance	100	80	40	30	0	ohms (min)

Operating Conditions

A.C. input voltage	250	240	220	200	127	volts (rms)
Filter input capacitor	60	60	60	60	60	μ F
Total effective plate supply impedance	125	105	65	30	0	ohms
D.C.output current	180	180	180	180	180	ma
D.C.output voltage	195	195	195	195	127	volts

Note 1. When two tubes are connected in parallel, the maximum value of the capacitor may be increased to 100 μ F. In this case each plate must have the minimum total effective supply impedance specified above.



19Y3**PHILIPS**