

19ZP4
CATHODE RAY TUBE

19 INCH, RECTANGULAR, GLASS	FACE PLATE --- SPHERICAL GRAY
FOCUS --- ELECTROSTATIC	NON ION TRAP GUN
DEFLECTION --- MAGNETIC	ALUMINIZED SCREEN
114 DEGREE DEFLECTION ANGLE	EXTERNAL CONDUCTIVE COATING

-----DESCRIPTION AND RATING-----

The 19ZP4 is a 19 inch electrostatic-focus and magnetic deflection glass picture tube. Outstanding features include a short over-all length, a small neck diameter and a non ion trap gun. The fluorescent screen is aluminized to increase light output and reduce undesirable screen charging. An external conductive coating is provided to serve as a filter capacitor when grounded.

ELECTRICAL DATA

Focusing Method	Electrostatic
Deflection Angle, Approximate	
Horizontal	102 degrees
Vertical	87 degrees
Diagonal	114 degrees
Direct Interelectrode Capacitance	
Cathode to all other electrodes, approximate	5 uuf
Grid #1 to all other electrodes, approximate	6 uuf
External Conductor Coating to Anode	1500 max. uuf
	1000 min. uuf
Heater Current at 6.3 volts	600 $\pm$ 10% ma.
Heater Warm Up Time	11 sec.

OPTICAL DATA

Phosphor Number	P4 Aluminized
Light Transmittance at Center Approx.	76 Percent

CATHODE RAY TUBE DEPARTMENT



Syracuse, N. Y.

MECHANICAL DATA

Overall Length	11 1/2 ± 5/16 inches
Greatest Dimensions of Tube	
Diagonal	18 5/8 ± 1/8 inches
Width	16 13/32 ± 1/8 inches
Height	13 11/32 ± 1/8 inches
Minimum Useful Screen Dimensions (Projected)	
Diagonal	17 9/16 inches
Horizontal Axis	15 1/8 inches
Vertical Axis	12 inches
Area	172 sq. inches
Neck Length	4 1/4 ± 3/16 inches
Bulb	J149-A1
Bulb Contact	JETEC No. J1-21
Base	JETEC No. B6-226
Basing	8JS
Bulb Contact Alignment	
Anode Contact Aligns with Rev. No. 4 ± 30 degrees	

RATINGS (Design Maximum System)

Unless otherwise specified, voltage values are positive and measured with respect to cathode.

Maximum Anode Voltage	20,000 volts
Minimum Anode Voltage	15,000 volts
Maximum Grid 4 (Focusing Electrode) Voltage	-500 to +1000 volts
Minimum Grid 2 Voltage	400 volts
Maximum Grid 2 Voltage	700 volts
Grid 1 Voltage	
Maximum Negative Value	140 volts DC
Maximum Negative Peak Value	200 volts
Maximum Positive Value	0 volts DC
Maximum Positive Peak Value	2 volts
Maximum Heater Voltage	6.9 volts
Minimum Heater Voltage	5.7 volts
Maximum Heater-Cathode Voltage	
Heater negative with respect to cathode	
During warm up period not to exceed 15 sec.	410 volts
After equipment warm-up period	180 volts
Heater positive with respect to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,500 volts DC
Grid #4 Voltage (Focusing Electrode(Notes 2 & 3)	250 volts DC
Grid #2 Voltage	450 volts DC
Grid #1 Voltage (Note 1)	-28 to -72 volts DC

MAXIMUM CIRCUIT VALUES

Maximum Grid #1 Circuit Resistance	1.5 max. megohm
Grid No. 2 Circuit Resistance	0.1 min. megohm
Focusing Electrode Circuit Resistance	0.1 min. megohm

Protective resistance in Grid No. 2 and focusing electrical circuits is advisable to prevent damage to tube. If applicable, one resistor common to both circuits may be used.

NOTES:

1. Visual extinction of focused raster.
2. With the combined Grid #1 bias voltage and video-signal voltage adjusted to give an anode current of 150 microamperes on a 15 1/8 x 11 15/16" pattern from RCA 2F21 monoscope or equivalent.
3. Individual tubes will have satisfactory focus at some value between 0 and 500 volts.

4/14/60

CATHODE RAY TUBE DEPARTMENT

GENERAL  ELECTRIC

Syracuse, N. Y.

PAGE 4
SCREEN DIMENSIONS
DIAGONAL - 17 9/16
WIDTH - 15 1/8
HEIGHT - 12
AREA - 172 SQ. IN.




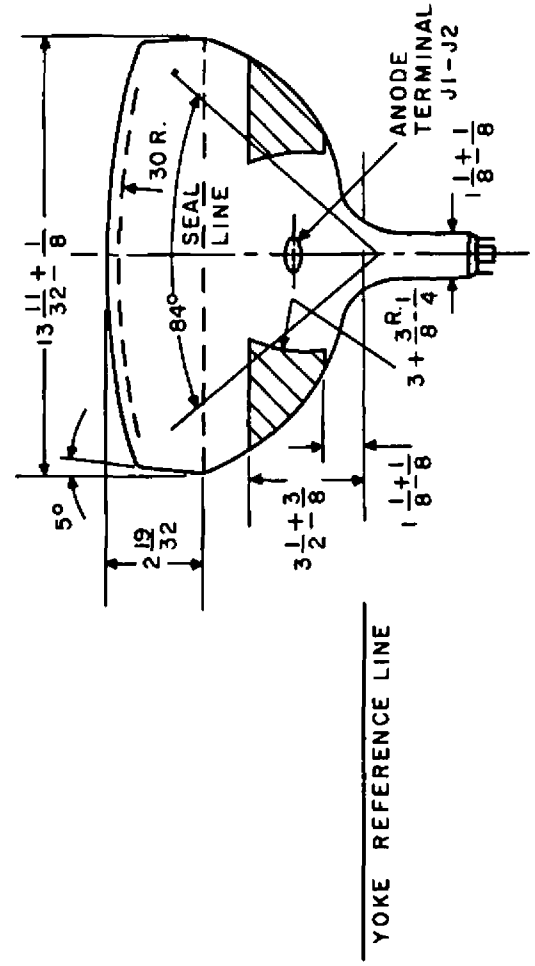


DIAGRAM NOTES

1. THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE C-C' OF GAGE (EIA NO. 126) WITH THE GLASS FUNNEL.
2. DEFLECTION ANGLE ON THE DIAGONAL IS 114° .
3. ANODE TERMINAL ALIGNS WITH PIN NO. 4 ± 30 DEGREES.
4. USE A NON-RIGIDLY MOUNTED SOCKET WITH FLEXIBLE LEADS. BOTTOM CIRCUMFERENCE OF BASE WAFER WILL FALL WITHIN $1-3/4$ INCH DIAMETER CIRCLE CONCENTRIC WITH THE BULB AXIS.

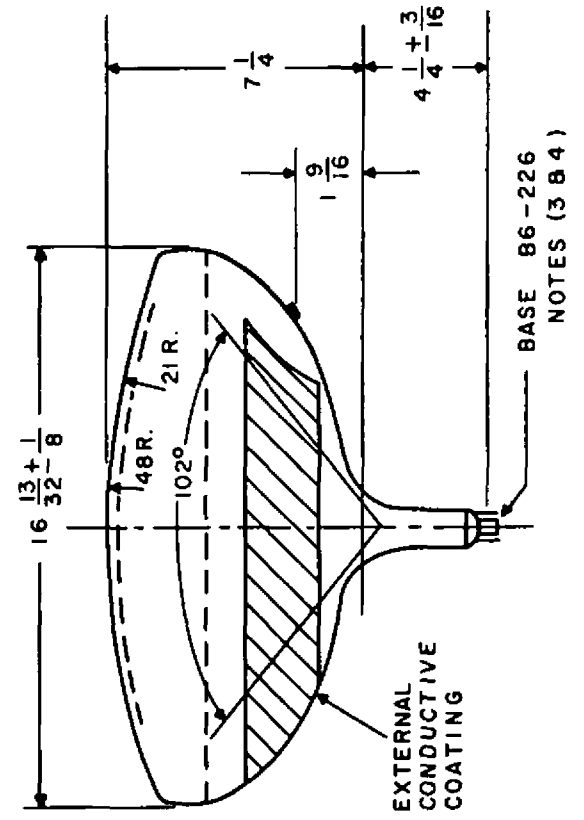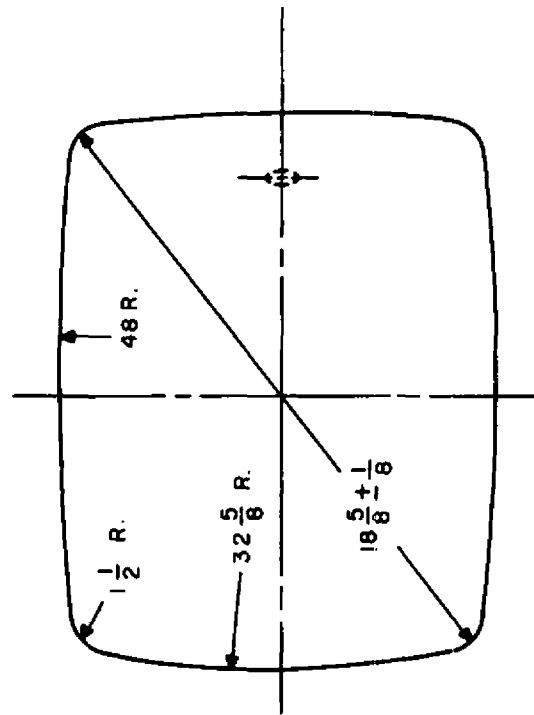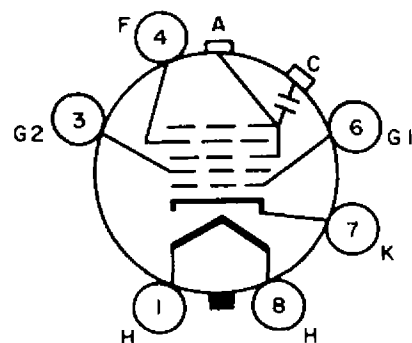

BASING DIAGRAM

BJS

CATHODE RAY TUBE DEPARTMENT
GENERAL ELECTRIC COMPANY
SYRACUSE, NEW YORK