

RETMA Registration Data
TYPE 1AQ5/1R5-SF
PENTAGRID CONVERTER

MECHANICAL DATA

Cathode coated filament
Outline drawing 5-2, Bulb T-5 1/2
Base E7-1, Miniature Button 7-Pin
Maximum diameter 3/4"
Maximum seated height 1 7/8"
Maximum overall length 2 1/8"
Pin connections Basing 7AT
 Pin 1 - Negative filament, Pin 5 - Negative filament,
 Grid #5 Grid #5
 Pin 2 - Plate Pin 6 - Grid #3
 Pin 3 - Grid #2, Grid #4 Pin 7 - Positive filament
 Pin 4 - Grid #1
Mounting position Any

ELECTRICAL DATA

Filament Characteristics
 Filament voltage (dc) 1.4 volts
 Filament current 25 ma

Direct Interelectrode Capacitance*
 Signal grid to mixer plate: (g3 to plate) 0.4 uuf max.
 R.F. Input: g3 to (f, g5+g1+g2,4+p) 7.0 uuf
 Mixer Output: p to (f, g5+g1+g2,4+g3) .. 7.5 uuf
 * Without external shield

Ratings (Design center values)
 Maximum plate voltage 90 volts
 Maximum grid #2 & 4 voltage 67.5 volts
 Maximum grid #2 & 4 supply voltage 90 volts
 Maximum dc grid #3 voltage 0 volts
 Maximum cathode current 5.0 ma

Typical Operation Condition and Characteristics**
 Plate voltage 90 volts
 Grid #2 & 4 voltage 45 volts
 Grid #3 voltage 0 volts
 Grid #1 resistor 0.1 megohms
 Grid #1 voltage r.m.s. 15 volts

2/10/56 THE FEDERATION OF JAPAN ELECTRIC
 COMMUNICATION INDUSTRIAL ASSOCIATIONS
 "Sankei Kaikan" Bldg. 1AQ5/1R5-SF
 3, 1-chome, Ohte-machi, Chiyoda-ku, Tokyo,
 J A P A N


Plate resistance (approx.)	0.8 megohms
Conversion transconductance	250 micromhos
Cathode current	2.5 ma
Plate current	0.64 ma
Grid #1 current	0.14 ma

**Characteristics shown are obtained in the standard RETMA conversion conductance test set which uses separate excitation.

The characteristics under these conditions correspond very closely with those obtained in a self-excited oscillatory circuit.

1AQ5/1R5-SF

E_{c3} I_b , I_k , g_c Characteristics Curves

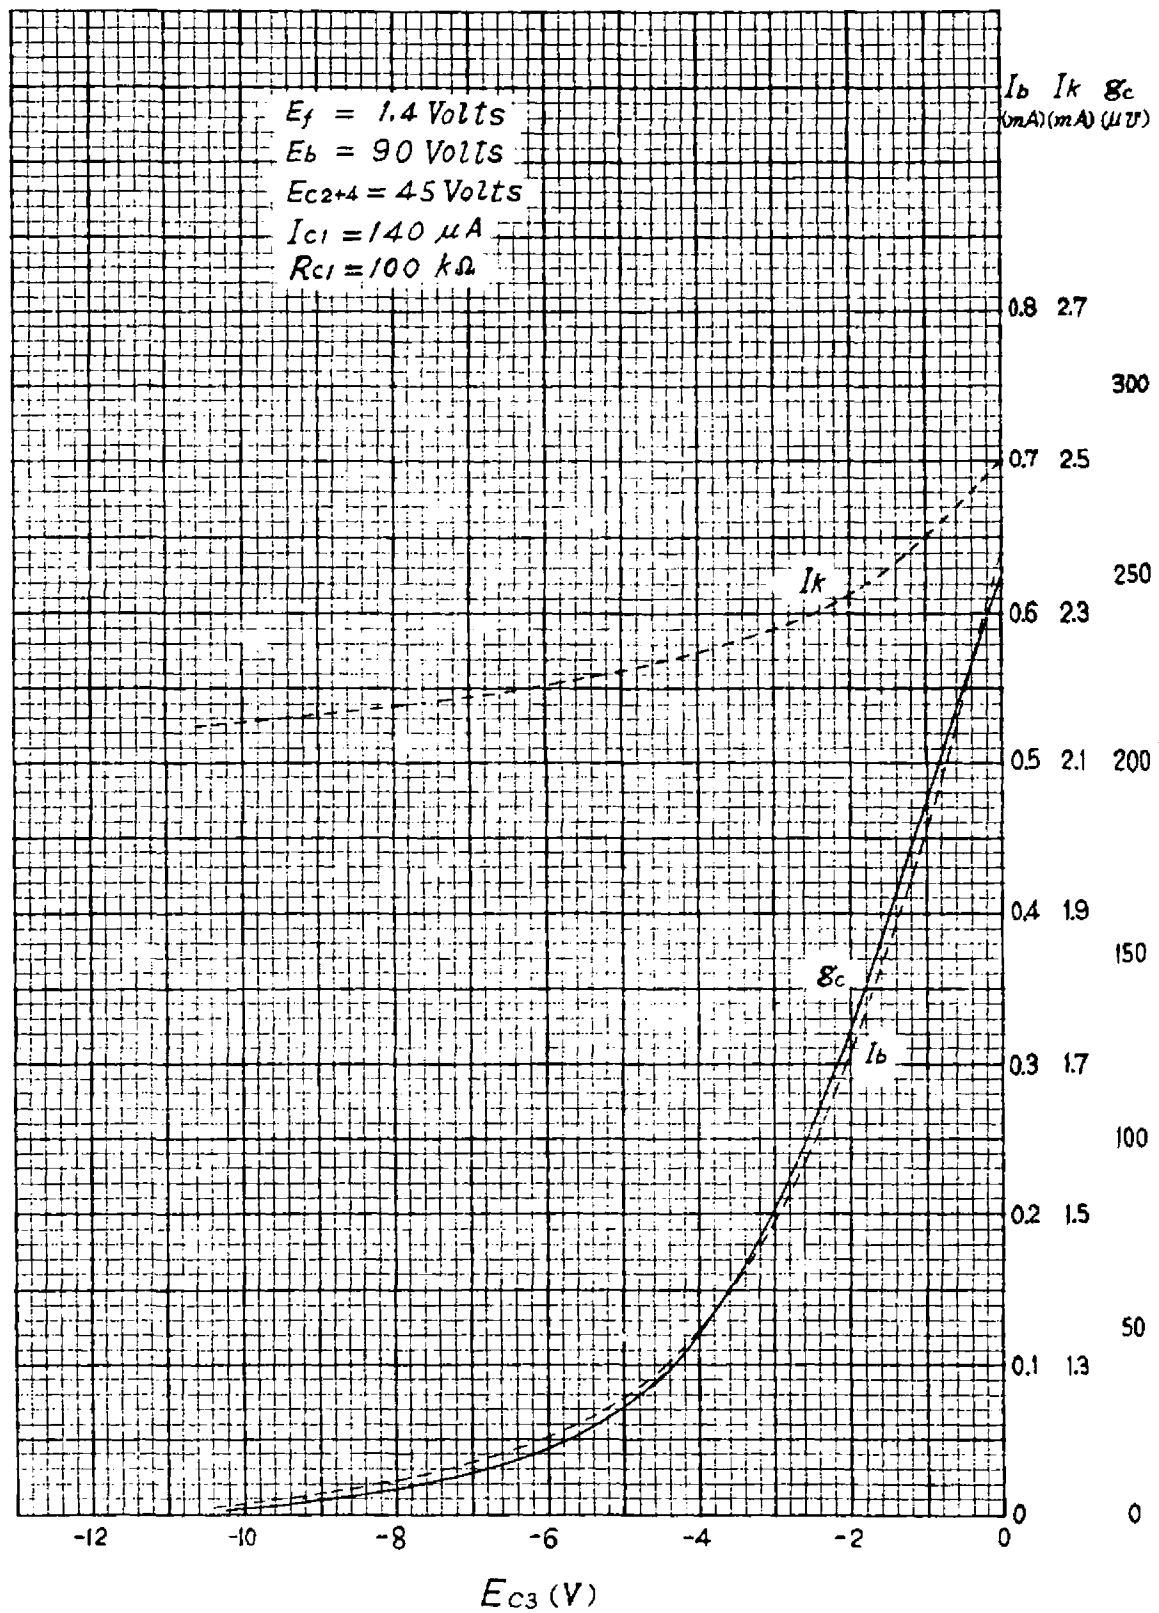

1AQ5/1R5-SF

I_{c1} , I_k , g_c Characteristics Curves

