



**ELECTRONIC
INNOVATIONS**
IN ACTION

TUBES

—PRODUCT INFORMATION—

Page 1 12-70

Compactron Diode

1BY2-A

**FOR TV HIGH-VOLTAGE
RECTIFIER APPLICATIONS**

■ MONOCHROME TYPE

■ 22000 VOLTS DC

■ 0.5 MILLIAMPERES DC

■ X-RADIATION RATING

The 1BY2-A is a filamentary diode designed for use in television receivers as the high-voltage rectifier to supply power to the anode of the television picture tube. It is primarily intended for use in flyback types of power supplies. Features of the 1BY2-A include built-in X-radiation shielding and additional design and specification controls for the reduction of X-radiation output.

GENERAL

ELECTRICAL

Cathode - Coated Filament

Filament Characteristics and Ratings

Filament Voltage, AC or DC ★ 1.25 ± 0.2 Volts

Filament Current ● 0.2 Amperes

Direct Interelectrode Capacitances, approximate ▲
Plate to All: p to (f + i.s.) 1.6 pf

MECHANICAL

Operating Position - Any

Envelope - T-9, Glass

Base - E12-70, Button 12-Pin

Top Cap - C1-1, C1-34 or C1-49, Small

Outline Drawing

Maximum Bulb Diameter 1.188 Inches

Maximum Seal Diameter 1.250 Inches

Minimum Bulb Diameter 1.062 Inches

Maximum Over-all Length 3.125 Inches

Maximum Seated Height 2.750 Inches

Minimum Seated Height 2.500 Inches

MAXIMUM RATINGS

FLYBACK RECTIFIER SERVICE † — DESIGN-MAXIMUM VALUES UNLESS OTHERWISE STATED

Peak Inverse Plate Voltage

DC Component (Absolute-Maximum Value) 22000 Volts

Total DC and Peak (Absolute-Maximum Value) 26000 Volts


Steady-State Peak Plate Current 50 Milliamperes

DC Output Current 0.5 Milliamperes

Filament Voltage, AC or DC (Absolute-Maximum Value) § 1.45 Volts

Filament Voltage, AC or DC (Absolute-Minimum Value) 1.05 Volts


PHYSICAL DIMENSIONS

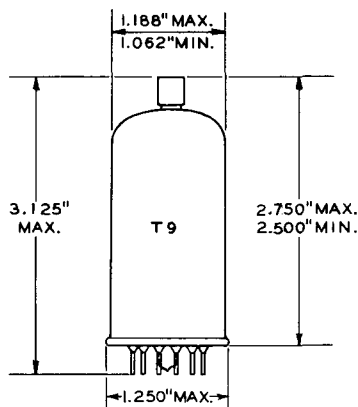

TERMINAL CONNECTIONS †

- Pin 1 - Filament and Internal Shield
- Pin 2 - Filament and Internal Shield
- ⊕ Pin 3 - No Connection
- ⊕ Pin 4 - No Connection
- Pin 5 - Filament and Internal Shield
- Pin 6 - Filament and Internal Shield
- ⊕ Pin 7 - No Connection
- Pin 8 - Filament
- Pin 9 - Internal Connection - Do Not Use
- ⊕ Pin 10 - No Connection
- Pin 11 - Filament and Internal Shield
- Pin 12 - Filament
- Cap - Plate

BASING DIAGRAM

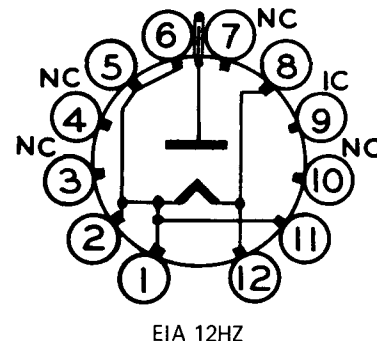

GENERAL  ELECTRIC

Supersedes PI Sheet dated 11-69

MAXIMUM RATINGS (Cont'd)

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions. The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.	The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.
Absolute-Maximum ratings are limiting values of operating and environmental conditions applicable to any electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions. The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making no allowance for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration and of	all other electron devices in the equipment. The equipment manufacturer should design so that initially and throughout life no absolute-maximum value for the intended service is exceeded with any tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of the tube under consideration and of all other electron devices in the equipment.

AVERAGE CHARACTERISTICS

Tube Voltage Drop, approximate Ib = 7.0 Milliamperes	225 Volts
--	------------------

X-RADIATION RATING

X-radiation, maximum	0.5 mR/hr
-----------------------------	------------------

Based on accumulated sample test data taken initially and during life test, tubes do not exceed the maximum rating limit of 0.5 mR/hr at any time throughout their useful life, when operated within the maximum ratings, including filament voltage, specified on this data sheet. This X-radiation maximum rating is based on the use of the Victoreen 440 RF/C survey meter as the standard instrument for X-radiation measurement. X-radiation is measured with the plastic spacer of the 440 RF/C survey meter at a distance of four (4) inches from the external surface of the tube under test. This rating information is not necessarily applicable when a different radiation measuring instrument is used. Operation of the 1BY2-A outside of the Absolute-Maximum	Ratings indicated may damage the tube and/or result in either temporary or permanent changes in the X-radiation characteristics of the tube. Equipment design must be such that these Absolute-Maximum Ratings are not exceeded. The above X-radiation characteristics are measured in accordance with JEDEC Publication No. 67A, "Recommended Practice for Measurement of X-radiation from Receiving Tubes," and controlled in accordance with JEDEC Publication No. 73A, "Recommended Practice for Quality Control of X-radiation from High Voltage Rectifier and Shunt Regulator Receiving Tubes." The General Electric Company makes no representation concerning the X-radiation output from these tubes when operated beyond the maximum ratings set forth herein.
--	---

WARNING**X-RADIATION**

Operation of the 1BY2-A outside of the Absolute-Maximum Ratings indicated may produce soft X-rays above 0.5 milliroentgens per hour which may constitute a health hazard on prolonged exposure at close range unless the tube is adequately shielded. Equipment design must provide required shielding.

Precautions must be exercised during the servicing of the equipment employing the 1BY2-A to assure that the high voltage is adjusted to the recommended value and that any shielding components are replaced to their intended positions before the equipment is operated.

SHOCK HAZARD

The high voltages at which the 1BY2-A is operated can be extremely dangerous to the user or serviceman. Extreme care should be taken in the use of and for the servicing and adjustment of any high voltage circuit.

Precautions must be exercised during the replacement or servicing of the 1BY2-A in equipment to assure that the high voltage output terminal is properly grounded while inserting or removing the tube from its socket or while connecting or disconnecting the top cap connector.

THE EQUIPMENT MANUFACTURER SHOULD PROVIDE A WARNING LABEL IN AN APPROPRIATE POSITION ON THE EQUIPMENT TO ADVISE THE SERVICEMAN OF ALL PRECAUTIONS HEREIN.


NOTES

- ★ The equipment designer should design the equipment so that filament voltage is centered at the specified bogey value, with filament supply variations restricted to maintain filament voltage within the specified tolerance.
- Filament current of a bogey tube at $E_f = 1.25$ volts.
- ▲ Without external shield.
- ◆ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.
- § **CAUTION** - Operation of this tube for an extended period of time with the filament voltage above the absolute maximum rated value of 1.45 volts may result in the production of X-radiation in excess of the maximum rated limit of 0.5mR/hr.
- ⊕ Socket terminals 3, 4, 7 and 10 may be used as tie points for components at or near filament potential.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

AVERAGE PLATE CHARACTERISTICS

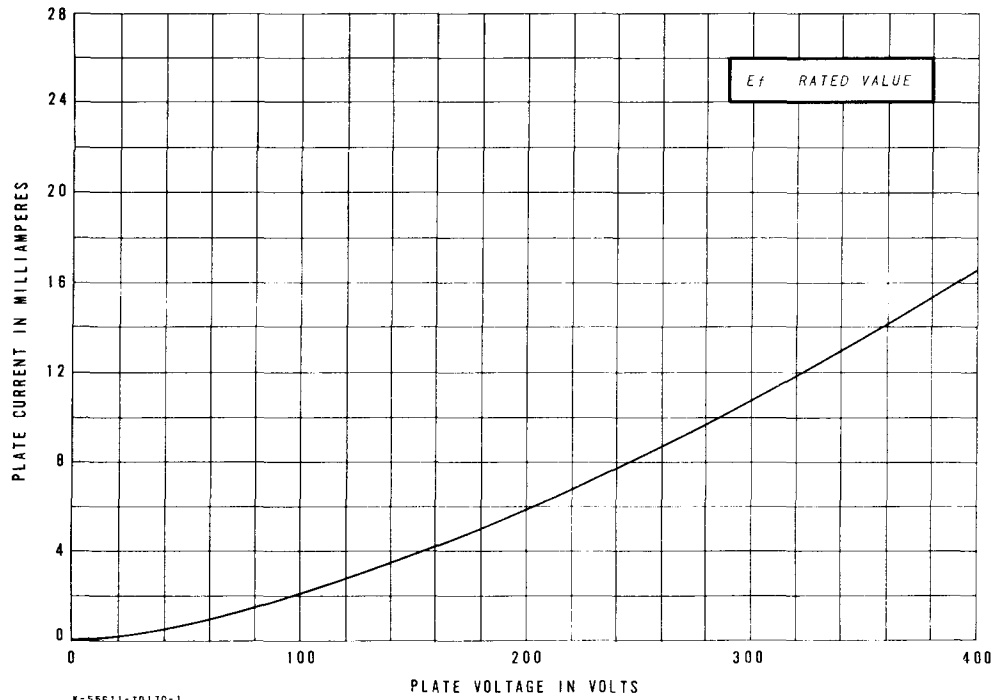

TUBE PRODUCTS DEPARTMENT

GENERAL  ELECTRIC

Owensboro, Kentucky 42301