



24AHP4

24AHP4

PICTURE TUBE

RECTANGULAR GLASS TYPE
LOW-VOLTAGE FOCUS

ALUMINIZED SCREEN
MAGNETIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current $0.6 \pm 10\%$ amp

Direct Interelectrode Capacitances:

Grid No.1 to all other electrodes 6 μf

Cathode to all other electrodes 5 μf

External conductive coating to ultor. $\begin{cases} 2500 \text{ max.} \\ 2000 \text{ min.} \end{cases}$ μf

Faceplate, Spherical. Filterglass

Light transmission (Approx.). 76%

Phosphor (For curves, see front of this Section). .P4—Sulfide Type
Aluminized

Fluorescence. White

Phosphorescence White

Persistence Short

Focusing Method Electrostatic

Deflection Method Magnetic

Deflection Angles (Approx.):

Diagonal. 110°

Horizontal. 105°

Vertical. 87°

Electron Gun. Type Requiring No Ion-Trap Magnet

Tube Dimensions:

Overall length. $15-7/8" \pm 5/16"$

Greatest width. $22-11/16" \pm 1/8"$

Greatest height $18-1/2" \pm 1/8"$

Diagonal. $24" \pm 1/8"$

Neck length $5-7/16" \pm 1/8"$

Screen Dimensions (Minimum):

Greatest width. $21-7/16"$

Greatest height $16-7/8"$

Diagonal. $22-13/16"$

Projected area. 332 sq. in.

Weight (Approx.). 28 lbs

Mounting Position Any

Cap Recessed Small Cavity (JETEC No.J1-21)

Bulb. J192 (110°)

Base. Small-Button Eightar 7-Pin,
Arrangement 2, (JETEC No.B7-183)

Basing Designation for BOTTOM VIEW. 8HR

Pin 1—Heater

Pin 2—Grid No.1


Pin 3—Grid No.2

Pin 4—Grid No.4

Pin 6—Grid No.1

Pin 7—Cathode

Pin 8—Heater



Cap—Ultor

(Grid No.3,

Grid No.5,

Collector)

C—External
Conductive
Coating



24AHP4

PICTURE TUBE

GRID-DRIVE[▲] SERVICE

Unless otherwise specified, voltage values are positive with respect to cathode

Maximum Ratings, Design-Center Values:

ULTOR VOLTAGE	{ 20000 max. volts
GRID-No.4 VOLTAGE:	{ 12000 [‡] min. volts
Positive value.	1000 max. volts
Negative value.	500 max. volts
GRID-No.2 VOLTAGE	500 max. volts
GRID-No.1 VOLTAGE:	
Negative peak value	200 max. volts
Negative bias value	140 max. volts
Positive bias value	0 max. volts
Positive peak value	2 max. volts
PEAK HEATER-CATHODE VOLTAGE:	
Heater negative with respect to cathode:	
During equipment warm-up period	
not exceeding 15 seconds.	410 max. volts
After equipment warm-up period.	180 max. volts
Heater positive with respect to cathode.	180 max. volts

Equipment Design Ranges:

With any ultor voltage (E_{c5k}) between 12000 and 20000 volts and grid-No.2 voltage (E_{c2k}) between 200 and 500 volts

Grid-No.4 Voltage for Focus.	-50 to +350	volts
Grid-No.1 Voltage (E_{c1k}) for Visual Extinction of Focused Raster.	See Raster-Cutoff-Range Chart for Grid-Drive Service	
Grid-No.1 Video Drive from Raster Cutoff (Black Level):		
White-level value (Peak positive)	Same value as determined for E_{c1k} except video drive is a positive voltage	
Grid-No.4 Current	-25 to +25	μ a
Grid-No.2 Current	-15 to +15	μ a
Field Strength of Adjustable Centering Magnet*.	0 to 8	gausses

Examples of Use of Design Ranges:

With ultor voltage of	14000	16000	volts
and grid-No.2 voltage of	300	400	volts
Grid-No.4 Voltage for Focus	-50 to +350	-50 to +350	volts

[▲] Grid drive is the operating condition in which the video signal varies the grid-No.1 potential with respect to cathode.

[‡], [§], * : See next page.



24AHP4

24AHP4

PICTURE TUBE

Grid-No.1 Voltage for Visual Extinction of Focused Raster	-28 to -72	-36 to -94	volts
Grid-No.1 Video Drive from Raster Cutoff (Black Level): White-level value.	28 to 72	36 to 94	volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 max.	megohms
--	----------	---------

CATHODE-DRIVE[■] SERVICE

*Unless otherwise specified, voltage values are positive
with respect to grid No.1*

Maximum Ratings, Design-Center Values:

ULTOR-TO-GRID-No.1 VOLTAGE	{ 20000 max. 12000 [■] min.	volts volts
GRID-No.4-TO-GRID-No.1 VOLTAGE:		
Positive value	1000 max.	volts
Negative value	500 max.	volts
GRID-No.2-TO-GRID-No.1 VOLTAGE	640 max.	volts
GRID-No.2-TO-CATHODE VOLTAGE	500 max.	volts
CATHODE-TO-GRID-No.1 VOLTAGE:		
Positive peak value.	200 max.	volts
Positive bias value.	140 max.	volts
Negative bias value.	0 max.	volts
Negative peak value.	2 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode:		
During equipment warm-up period		
not exceeding 15 seconds	410 max.	volts
After equipment warm-up period	180 max.	volts
Heater positive with respect to cathode.	180 max.	volts

Equipment Design Ranges:

With any ultor-to-grid-No.1 voltage ($E_{c_5g_1}$) between
12000 and 20000 volts
and grid-No.2-to-grid-No.1 voltage ($E_{c_2g_1}$) between
225 and 640 volts

Grid-No.4-to-Grid-No.1 Voltage for Focus [§]	-50 to +350	volts
--	-------------	-------

■ Cathode drive is the operating condition in which the video signal varies the cathode potential with respect to grid No.1 and the other electrodes.

■ This value is a working design-center minimum. The equivalent absolute minimum ultor-or ultor-to-grid-No.1 voltage is 11000 volts, below which the serviceability of the 24AHP4 will be impaired. The equipment designer has the responsibility of determining a minimum design value such that under the worst probable operating conditions involving supply-voltage variation and equipment variation the absolute minimum ultor-or ultor-to-grid-No.1 voltage is never less than 11000 volts.

*.§: See next page.



24AHP4

PICTURE TUBE

Cathode-to-Grid-No.1

Voltage (E_{k1}) for
Visual Extinction
of Focused Raster. . . .

See Raster-Cutoff-Range Chart
for Cathode-Drive Service

Cathode-to-Grid-No.1

Video Drive from Raster
Cutoff (Black Level):
White-level value
(Peak negative). . . .

Same value as determined for
 E_{k1} except video drive is a
negative voltage

Grid-No.4 Current.

-25 to +25 μ a

Grid-No.2 Current.

-15 to +15 μ a

Field Strength of Adjust-
able Centering Magnet* .

0 to 8 gauss

Examples of Use of Design Ranges:

With ultor-to-grid-No.1

voltage of	14000	16000	volts
------------	-------	-------	-------

and grid-No.2-to-grid-No.1

voltage of	300	400	volts
------------	-----	-----	-------

Grid-No.4-to-Grid-

No.1 Voltage for Focus . .	-50 to +350	-50 to +350	volts
----------------------------	-------------	-------------	-------

Cathode-to-Grid-No.1

Voltage for Visual
Extinction of Focused

Raster	28 to 60	36 to 78	volts
------------------	----------	----------	-------

Cathode-to-Grid-No.1

Video Drive from

Raster Cutoff

(Black Level):

White-level value.	-28 to -60	-36 to -78	volts
----------------------------	------------	------------	-------

Maximum Circuit Values:

Grid-No.1-Circuit Resistance.	1.5 max.	megohms
---------------------------------------	----------	---------

* Distance from Reference Line for suitable PM centering magnet should not exceed $2\frac{1}{4}$ ". Excluding extraneous fields, the center of the undeflected focused spot will fall within a circle having a $7/16$ -inch radius concentric with the center of the tube face. It is to be noted that the earth's magnetic field can cause as much as $1/2$ -inch deflection of the spot from the center of the tube face.

§ The grid-No.4 voltage or grid-No.4-to-grid-No.1 voltage required for focus of any individual tube is independent of ultor current and will remain essentially constant for values of ultor voltage (or ultor-to-grid-No.1 voltage) or grid-No.2 voltage (or grid-No.2-to-grid-No.1 voltage) within design ranges shown for these items.


For X-ray shielding considerations, see sheet
X-RAY PRECAUTIONS FOR CATHODE-RAY TUBES
at front of this Section



24AHP4

24AHP4

RASTER-CUTOFF-RANGE CHART For Grid-Drive Service

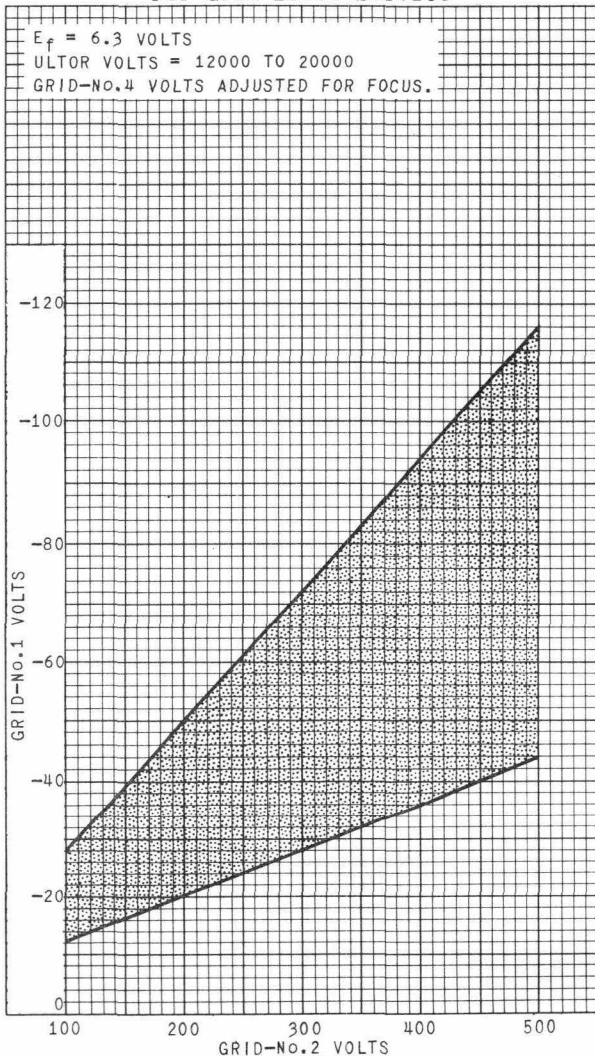


24AHP4



24AHP4


PICTURE TUBE

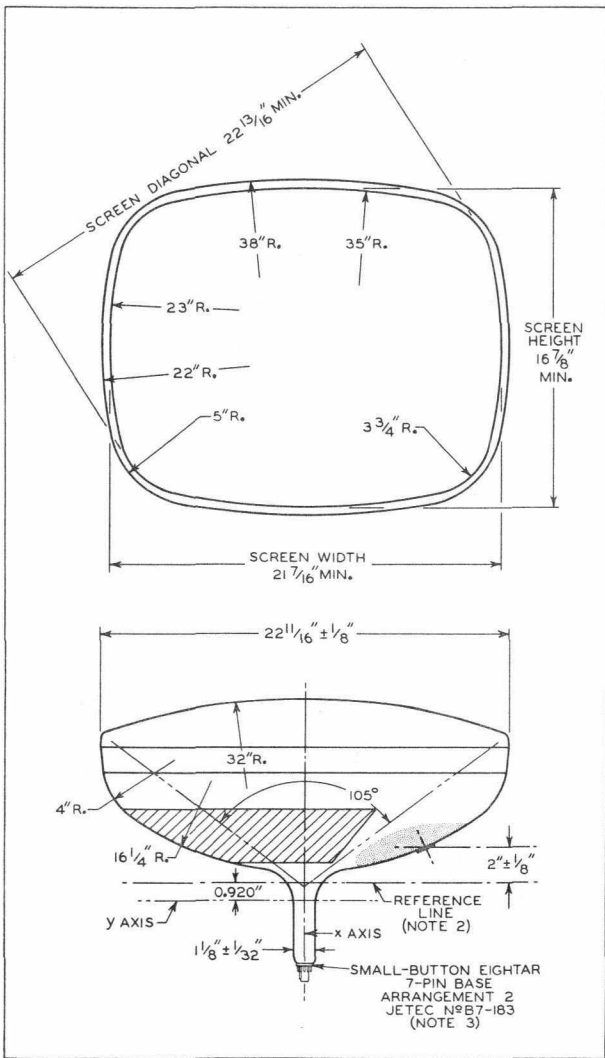



Technical drawing of the front view of a missile nose cone. The drawing shows a symmetrical, ogive-shaped nose cone with a central longitudinal axis. Key dimensions include:

- Total length: $15 \frac{7}{8} \pm \frac{5}{16}$ inches
- Distance from base to start of ogive: $10 \frac{7}{16} \pm \frac{3}{16}$ inches
- Distance from start of ogive to base of fin: $5 \frac{7}{16} \pm \frac{1}{8}$ inches
- Ogive radius: $7 \frac{1}{16}$ inches R.
- Fin radius: 7 inches R.
- Fin thickness: $4 \frac{3}{4}$ inches
- Fin-to-nose distance: $4 \frac{1}{8} \pm \frac{1}{8}$ inches
- Fin-to-nose distance: $3 \pm \frac{1}{8}$ inches
- Base diameter: $18 \frac{1}{2} \pm \frac{1}{8}$ inches
- Distance from base to fin root: $10 \frac{5}{8}$ inches
- Angle between fin and nose cone surface: 87°
- Central hole in fin
- Label: TRANSPARENT INSULATING COATING (NOTE 5)

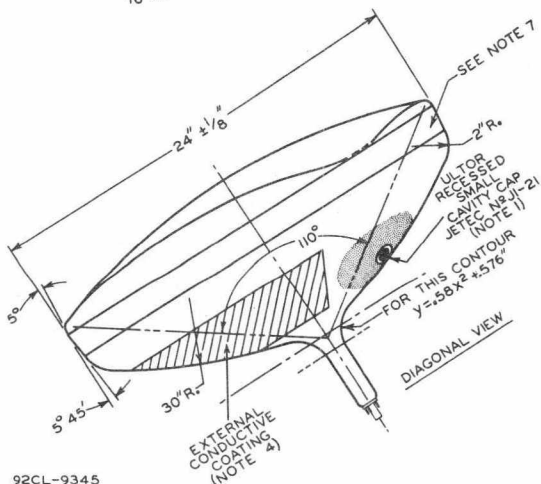


92CL-9345



24AHP4

PICTURE TUBE

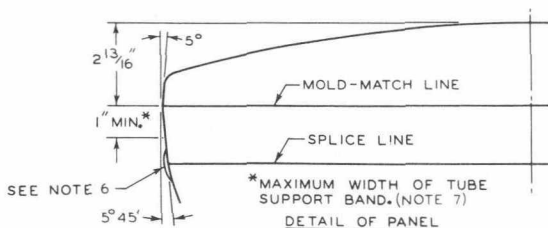

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND PIN 4 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ULTOR TERMINAL BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 30^\circ$. ULTOR TERMINAL IS ON SAME SIDE AS PIN 4.

NOTE 2: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE GAUGE JETEC No. 126 (SHOWN AT FRONT OF THIS SECTION) AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.

NOTE 3: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. THE DESIGN OF THE SOCKET SHOULD BE SUCH THAT THE CIRCUIT WIRING CANNOT IMPRESS LATERAL STRAINS THROUGH THE SOCKET CONTACTS ON THE BASE PINS. BOTTOM CIRCUMFERENCE OF BASE WAFER WILL FALL WITHIN A CIRCLE CONCENTRIC WITH BULB AXIS AND HAVING A DIAMETER OF 1-3/4".

NOTE 4: EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

NOTE 5: TO CLEAN THIS AREA, WIPE ONLY WITH SOFT DRY LINTLESS CLOTH.

NOTE 6: BULGE AT SPLICE-LINE SEAL MAY INCREASE THE INDICATED MAXIMUM VALUE FOR ENVELOPE WIDTH, DIAGONAL, AND HEIGHT BY NOT MORE THAN 1/8", BUT AT ANY POINT AROUND THE SEAL, THE BULGE WILL NOT PROTRUDE MORE THAN 1/16" BEYOND THE ENVELOPE SURFACE AT THE MOLD-MATCH LINE.

NOTE 7: UNDISTURBED AREA BETWEEN MOLD-MATCH LINE AND SPLICE LINE IS 1" MINIMUM. THIS SHOULD BE THE MAXIMUM WIDTH OF TUBE SUPPORT BAND.



24AHP4


24AHP4

RASTER-CUTOFF-RANGE CHART For Cathode-Drive Service

$E_f = 6.3$ VOLTS

ULTOR-TO-GRID-No.1 VOLTS = 12000 TO 20000

GRID-No.4-TO-GRID-No.1 VOLTS ADJUSTED FOR FOCUS.

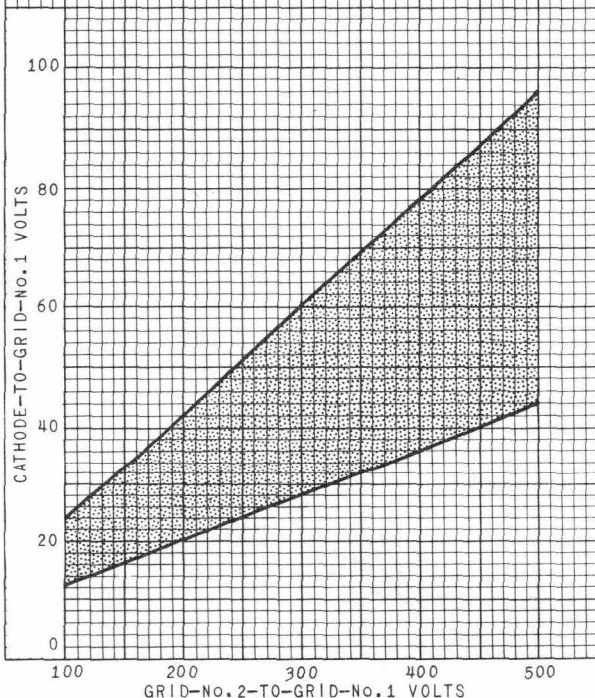

24AHP4




24AHP4

AVERAGE DRIVE CHARACTERISTICS

CATHODE-DRIVE SERVICE
 $E_f = 6.3$ VOLTS
 ULTOR-TO-GRID-No.1
 VOLTS = 16000
 CATHODE BIASED POSITIVE
 WITH RESPECT TO GRID
 No.1 TO GIVE FOCUSED
 RASTER CUTOFF.
 RASTER FOCUSED
 AT AVERAGE BRIGHTNESS.
 RASTER SIZE = 21" x 16"

GRID-DRIVE SERVICE
 $E_f = 6.3$ VOLTS
 ULTOR VOLTS = 16000
 GRID No.1 BIASED NEGA-
 TIVE WITH RESPECT TO
 CATHODE TO GIVE
 FOCUSED RASTER CUTOFF.
 RASTER FOCUSED
 AT AVERAGE BRIGHTNESS.
 RASTER SIZE = 21" x 16"

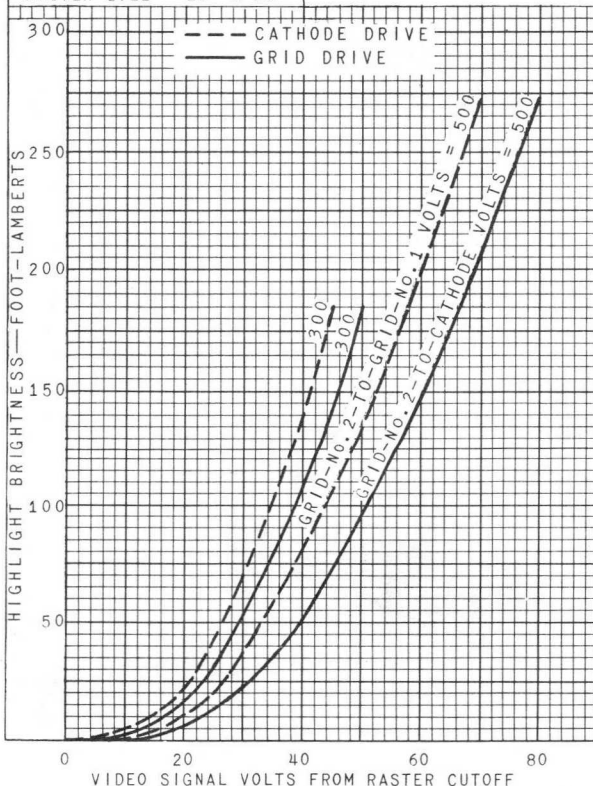



24AHP4

24AHP4

AVERAGE DRIVE CHARACTERISTICS

