



RADIO MANUFACTURERS ASSOCIATION
ENGINEERING DEPARTMENT

sponsor:
Rauland Corp.

Release No. 404

April 20, 1945

TYPE 1P36*

(Gas filled Phototube; two
electrodes)

General Characteristics

Electrical

Cathode Photo-Surface	S1
Luminous Sensitivity at 90 volts, 0 cycles	125 ua/Lumen
Max. gas amplification	10
Interelectrode Capacitances	1.5 - 4 uuf
Maximum dark current at 90 volts	0.1 ua
Wave length of maximum response	8000 A
Sensitivity at maximum response	0.012 ua/uwatt


Mechanical

Window Dimensions	0.875" x 0.562"
Seated Height to Center of Useful Cathode Area	1.688 in.
Maximum Overall Height	3.22 in.
Maximum Seated height	2.62 in.
Maximum Diameter	1.17 in.
Base	Tapered Small or Dwarf 4-pin.
Permissible Mounting Position	Any
Base Connections	2G

Maximum Ratings (absolute)


Anode Voltage (DC or Peak AC)	90 volts
Cathode Current Density for 0.2 sq. in. sensitive cathode area	100 ua/in ²
Average Cathode Current	20 ua
Ambient Temperature	100°C.

2G




April 20, 1945

TYPE IP34 PHOTOTUBE

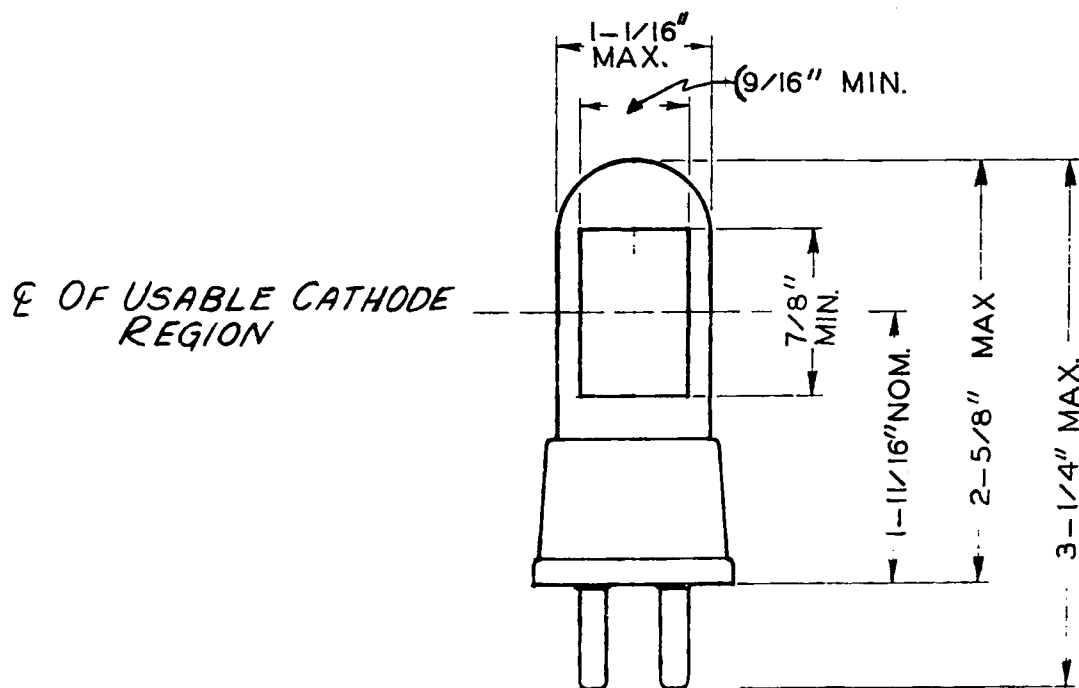

DIRECTION OF LIGHT



TAPERED SMALL OR DWARF 4-PIN BASE