



IT 6

IT 6

DIODE—SHARP-CUTOFF PENTODE

SUBMINIATURE TYPE

GENERAL DATA**Electrical:**

Filament, Coated:


Voltage	1.25	dc volts
Current	0.04	amp

Mechanical:

Mounting Position	Any
Maximum Overall Length	1-3/4"
Maximum Seated Length	1-1/2"
Length, Base Seat to Bulb Top (excluding tip)	1.200 ± 0.060"
Maximum Diameter	0.4"
Bulb	T-3
Base	Small-Button Sub-miniar 8-Pin

BOTTOM VIEW

Pin 1—Pentode Plate
 Pin 2—No
 Connection
 Pin 3—Grid No.1
 Pin 4—Filament (-),
 Grid No.3



Pin 5—Filament (+)
 Pin 6—Diode Plate
 Pin 7—No
 Connection
 Pin 8—Grid No.2

PENTODE UNIT
AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	67.5 max.	volts
GRID-No.2 (SCREEN) VOLTAGE	67.5 max.	volts
TOTAL CATHODE CURRENT	2.0 max.	ma

Typical Operation and Characteristics:

Plate Voltage	30	45	67.5	volts
Grid-No.2 Voltage	30	45	67.5	volts
Grid-No.1 (Control-Grid) Voltage	0	0	0	volts
Plate Resistance (Approx.)	0.5	0.5	0.4	megohm
Transconductance	330	475	600	μmhos
Plate Current	0.33	0.75	1.6	ma
Grid-No.2 Current	0.10	0.21	0.4	ma

DIODE UNIT**Maximum Ratings, Design-Center Values:**

PLATE CURRENT	0.25 max.	ma
-------------------------	-----------	----

Diode Considerations:


The diode is located at the negative end of the filament and is independent of the pentode unit except for the common filament.

1T6



1T6

AVERAGE PLATE CHARACTERISTICS

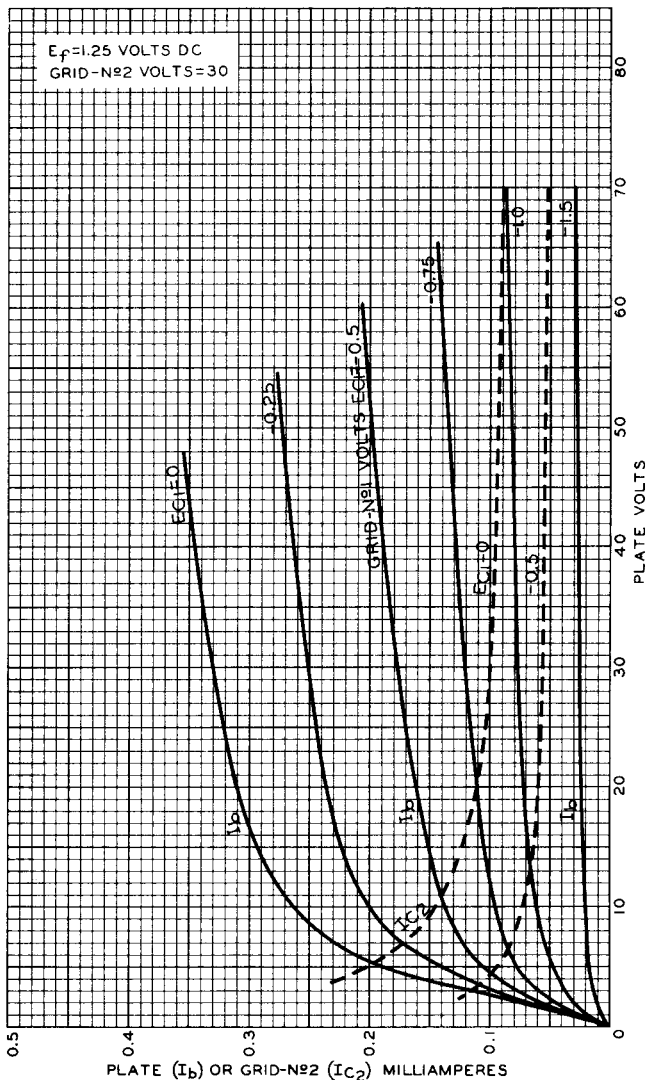

APRIL 26, 1949

TUBE DEPARTMENT

92CM-7260


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



IT6

IT6

AVERAGE PLATE CHARACTERISTICS

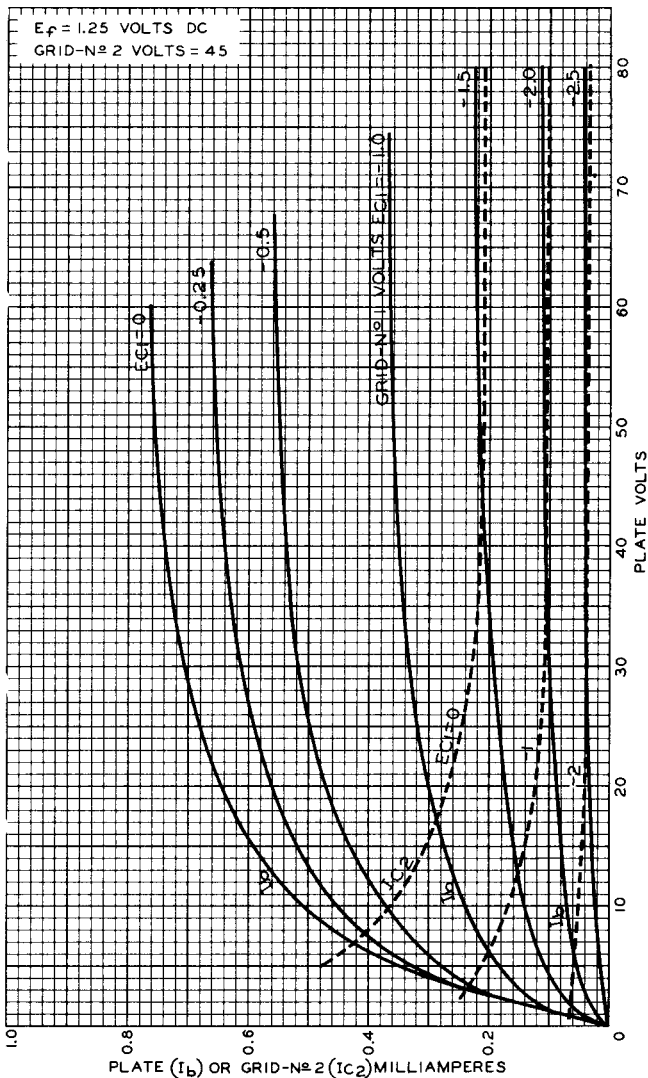

APRIL 21, 1949

TUBE DEPARTMENT

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7257

1T6



1T6

AVERAGE PLATE CHARACTERISTICS

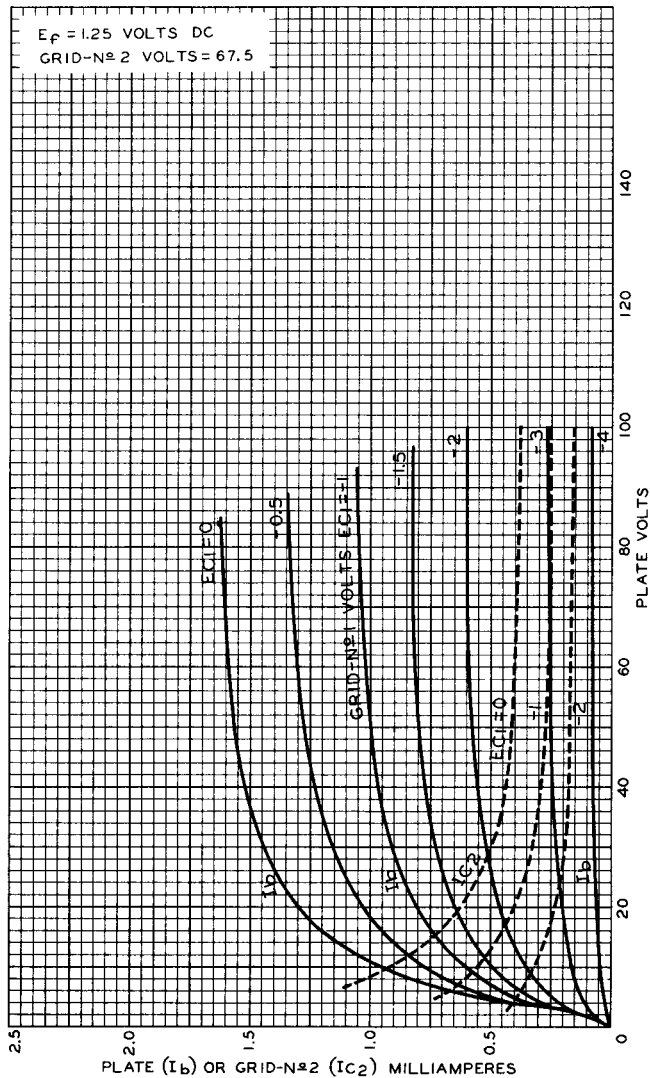

APRIL 20, 1949

TUBE DEPARTMENT

92CM-7256


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



1T6

1T6

AVERAGE CHARACTERISTICS

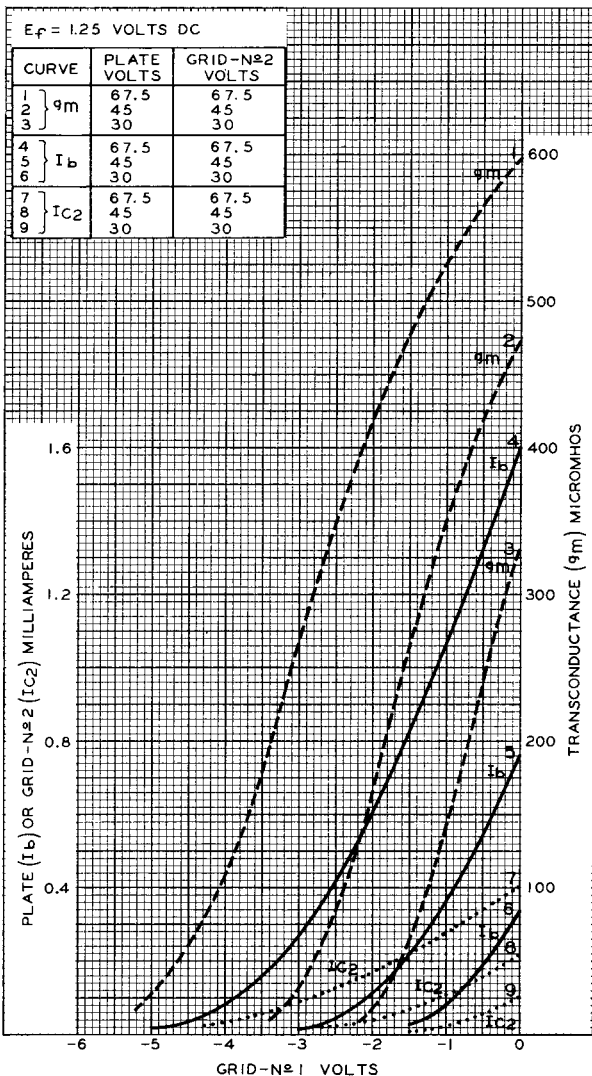

APRIL 25, 1949

TUBE DEPARTMENT

92CM-7259

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY