

EDISWAN**MAZDA****30PL13****TRIODE OUTPUT BEAM TETRODE
TENTATIVE****30PL13****GENERAL**

The 30PL13 is a Triode Output Beam Tetrode, each section having its own cathode. It is suitable for use in 110° Frame Time Base stages of AC/DC powered television receivers having series connected heater chains.

RATING

		Tetrode	Triode
Heater Current (amps)	I_h	0.3	
Heater Voltage (volts)	V_h	16.0	
Maximum Anode Voltage (volts)	$V_a(\max)$	250*	250
Maximum Screen Voltage (volts)	$V_{g2}(\max)$	250	
Maximum Anode Dissipation (watts)	$P_a(\max)$	7.0	1.0
Maximum Screen Dissipation (watts)	$P_{g2}(\max)$	2.4	
Maximum Mean Cathode Current (mA)	$I_{a(av)}\max$	75	
Mutual Conductance (mA/V)	g_m		3.4†
Amplification Factor	μ		18†
Maximum Heater/Cathode Voltage (volts r.m.s.)	$V_{h-k}(\max)$	150†	150†
Maximum Grid 1/Cathode Resistance (Self Bias) (megohms)	$R_{g1-k}(\max)$	2§	

* Maximum Peak Positive Anode Voltage (pulse) 2.0kV

Maximum Peak Negative Anode Voltage (pulse) 500V

Maximum pulse duration 4% of one cycle and not more than 800 μ s.

† Measured at $V_a = 200V$, $I_a = 10mA$.

† Measured with respect to the higher potential heater pin.

§ Maximum Tetrode Grid1/Cathode resistance, fixed bias, 1 megohm.

The characteristics for the triode section of the 30PL13 are the same as for the 6/30L2 triode.

30PL13

EDISWAN

MAZDA

30PL13

**TRIODE OUTPUT BEAM TETRODE
TENTATIVE**

DIMENSIONS

Maximum Overall Length	(mm)	78.5
Maximum Diameter	(mm)	22.2
Maximum Seated Height	(mm)	71.5
Approximate Nett Weight	(ozs)	$\frac{1}{2}$
Approximate Packed Weight	(ozs)	$\frac{3}{4}$

MOUNTING POSITION—Unrestricted

TYPICAL OPERATION—Frame Time-Base.

The frame output stage should be designed to allow for valve spread and deterioration during life in addition to component variation. Values of total tetrode peak anode current available from a new average valve and at the assumed end of life point on any valve are as follows :

	V_a	V_{g2}	V_{g1}	$I_a(\text{mA})$
Average New Valve	55	170	—1	175
Assumed End of Life Condition	50	170	—1	110

EDISWAN


MAZDA

30PL13

TRIODE OUTPUT BEAM TETRODE TENTATIVE

30PL13

BASE—Noval (B9A)



Viewed from free end of pins.


CONNECTIONS

Pin 1	Triode Grid	g _t
Pin 2	Tetrode Cathode, Beam Plates, Shield	k _q , b _p , s
Pin 3	Tetrode Control Grid	g ₁
Pin 4	Heater	h
Pin 5	Heater	h
Pin 6	Tetrode Anode	a _q
Pin 7	Tetrode Screen Grid	g ₂
Pin 8	Triode Cathode	k _t
Pin 9	Triode Anode	a _t

30PL13

EDISWAN

MAZDA

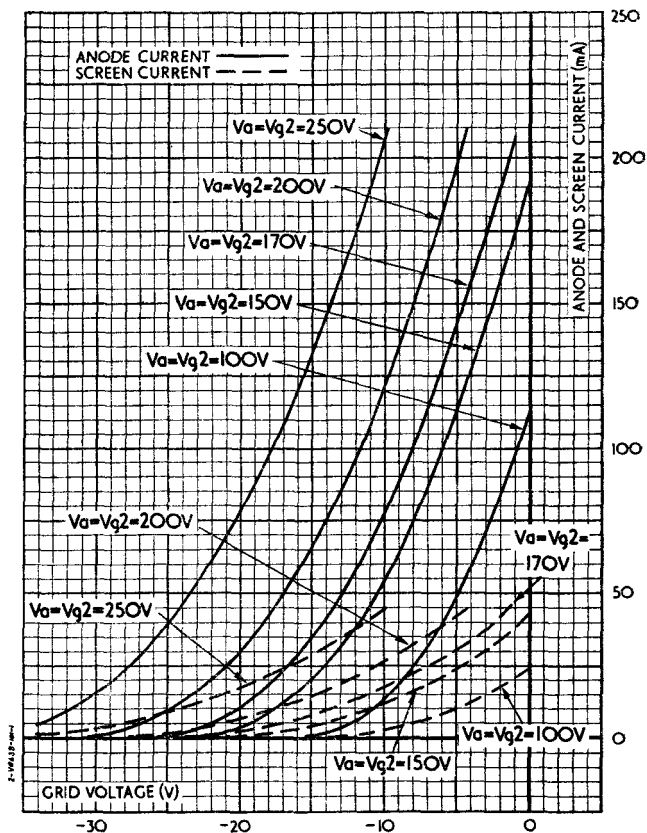30PL13**TRIODE OUTPUT BEAM TETRODE**
TENTATIVECHARACTERISTIC CURVES : $I_a, I_{g2}/V_g$
Tetrode Section

March 1960

Issue 1/2

ASSOCIATED ELECTRICAL INDUSTRIES LTD.
RADIO & ELECTRONIC COMPONENTS DIVISION

EDISWAN**MAZDA****30PL13****TRIODE OUTPUT BEAM TETRODE
TENTATIVE**CHARACTERISTIC CURVES: I_a/V_a

Tetrode Section

 $V_{g2}=170V.$ 