

TUNG-SOL**CATHODE RAY**

THE 21ATP4, 21ATP4A AND 21ATP4B ARE DIRECT VIEW PICTURE TUBES DESIGNED FOR USE IN TELEVISION APPLICATIONS. THEY ARE IDENTICAL EXCEPT FOR THE NON ALUMINIZED SCREEN ON THE 21ATP4B. THEIR COMMON FEATURES INCLUDE:

MAGNETIC DEFLECTION	ALUMINIZED SCREEN
UNIPOTENTIAL CATHODE	SPHERICAL FACEPLATE
GREY FILTER FACEPLATE	19 1/8" X 15" RASTER SIZE
EXTERNAL CONDUCTIVE COATING	EXTERNAL SINGLE FIELD ION TRAP
RECTANGULAR GLASS CONSTRUCTION	LOW VOLTAGE ELECTROSTATIC FOCUS

ELECTRICAL DATA

		LOW VOLTAGE ELECTROSTATIC	
FOCUSING METHOD			MAGNETIC
DEFLECTING METHOD			
DEFLECTION ANGLE (APPROX.):			
HORIZONTAL		85	DEGREES
DIAGONAL		90	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):			
CATHODE TO ALL OTHER ELECTRODES		5	μf
GRID #1 TO ALL OTHER ELECTRODES		6	μf
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE ^A		1 500	μf
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE ^A		1 200	μf

^A EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

OPTICAL DATA

	ALUMINIZED	P-4
PHOSPHOR NUMBER		
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		MEDIUM
FACEPLATE LIGHT TRANSMISSION AT CENTER (APPROX.)	71	PERCENT

RATINGS

DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE, GRID #3, GRID #5 VOLTAGE *	18 000	VOLTS
MAXIMUM DC GRID #4 VOLTAGE (FOCUSING ELECTRODE)	-500 TO +1000	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	500	VOLTS
MAXIMUM GRID #1 VOLTAGE:		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	VOLTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEGOHMS

* VALUE FOR 21ATP4A 20,000 VOLTS.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE, GRID #3, GRID #5 VOLTAGE ^B	16 000	VOLTS
DC GRID #4 VOLTAGE ^C	-64 TO +350	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^D	-28 TO -72	VOLTS
ION TRAP MAGNET FIELD STRENGTH (APPROX.)	35	GAUSSES

^B BRILLIANCE AND DEFINITION DECREASE WITH DECREASING ANODE VOLTAGE. IN GENERAL, THE ANODE VOLTAGE SHOULD NOT BE LESS THAN THIS VALUE.


^C WITH THE COMBINED GRID #1 BIAS VOLTAGE AND VIDEO-SIGNAL VOLTAGE ADJUSTED TO GIVE AN ANODE CURRENT OF 100 MICROAMPERES ON A 19 1/8" X 15" PICTURE SIZE.

^D VISUAL EXTINCTION OF FOCUSED RASTER.

TUNG-SOL


MECHANICAL DATA

OVERALL LENGTH	$20 \pm \frac{3}{8}$	INCHES
GREATEST DIMENSIONS OF BULB:		
DIAGONAL	$21 \frac{3}{8} \pm \frac{3}{16}$	INCHES
WIDTH	$20 \frac{1}{4} \pm \frac{3}{16}$	INCHES
HEIGHT	$16 \frac{3}{8} \pm \frac{3}{16}$	INCHES
MINIMUM USEFUL SCREEN DIMENSIONS:		
WIDTH	$19 \frac{1}{8}$	INCHES
HEIGHT	15	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 6 PIN	B6-63
BASING		12L
BULB CONTACT ALIGNMENT		
J1-21 CONTACT ALIGNS WITH PIN POSITION #6 $\pm$ 30 DEGREES		

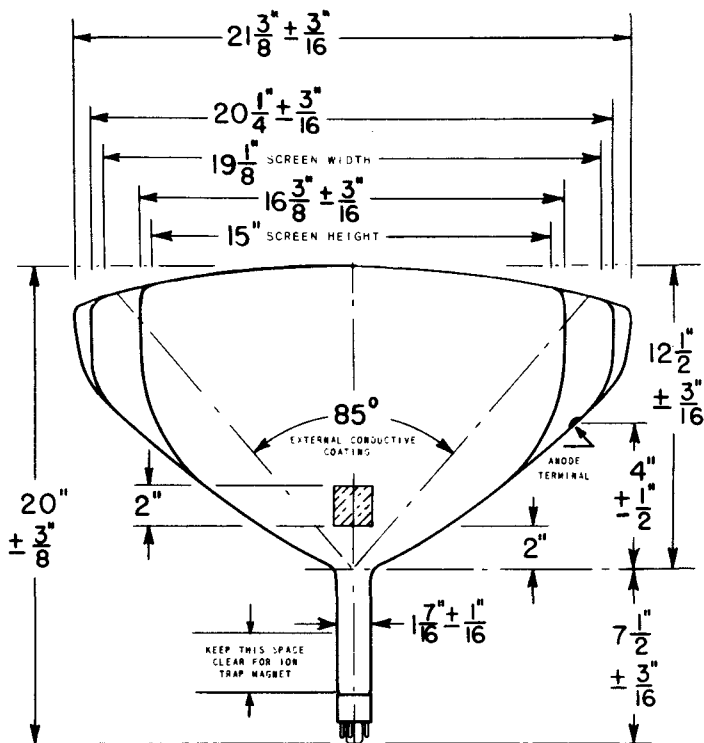

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID NO. 1
 PIN 6 - GRID NO. 4
 PIN 10 - GRID NO. 2
 PIN 11 - CATHODE



PIN 12 - HEATER
 ANODE CAP:
 GRID NO. 3
 GRID NO. 5