

# PHILCO<sup>®</sup>

## CATHODE RAY TUBE

### DATA SHEET

TENTATIVE

## 23BVP4

### TELEVISION

### PICTURE

### TUBE

#### DESCRIPTION

The 23BVP4 is a 23" directly viewed rectangular glass type cathode ray tube with an aluminized screen. Other features include a spherical faceplate, bonded shield, grey filter glass, electrostatic focus, 92° magnetic deflection, and no ion trap.

#### ELECTRICAL DATA

|                                                |                       |
|------------------------------------------------|-----------------------|
| Focusing Method                                | Electrostatic         |
| Deflecting Method                              | Magnetic              |
| Deflection Angle, approximate                  |                       |
| Horizontal                                     | 81 Degrees            |
| Vertical                                       | 66 Degrees            |
| Diagonal                                       | 92 Degrees            |
| Direct Interelectrode Capacitance, approximate |                       |
| Cathode to All                                 | 5.0 $\mu$ f           |
| Grid #1 to All                                 | 6.0 $\mu$ f           |
| External Coating Capacitance                   | 2000 Min. $\mu$ f     |
|                                                | 2500 Max. $\mu$ f     |
| Heater Voltage                                 | 6.3 Volts             |
| Heater Current                                 | 0.60 $\pm$ 5% Amperes |
| Heater Warm-up Time (Note 1)                   | 11 Seconds            |

#### OPTICAL DATA

|                                           |               |
|-------------------------------------------|---------------|
| Phosphor Number                           | Aluminized P4 |
| Fluorescent Color                         | White         |
| Persistence                               | Medium Short  |
| Faceplate (Bonded Shield)                 | FP198A1       |
| Light Transmission at Center, approximate | 40 Percent    |

#### MECHANICAL DATA

|                                                                  |                                                |
|------------------------------------------------------------------|------------------------------------------------|
| Overall Length                                                   | 18 $\frac{13}{16}$ $\pm$ $\frac{7}{16}$ Inches |
| Neck Length                                                      | 6 $\pm$ $\frac{3}{16}$ Inches                  |
| Minimum Useful Screen Dimensions<br>(maximum assured dimensions) |                                                |
| Diagonal                                                         | 22 $\frac{5}{16}$ Inches                       |
| Width                                                            | 19 $\frac{5}{16}$ Inches                       |
| Height                                                           | 15 $\frac{1}{4}$ Inches                        |
| Area (Projected)                                                 | 282 Sq. Inches                                 |
| Bulb                                                             | J187D1 or Equiv.                               |
| Base                                                             | B6-203                                         |
| Basing                                                           | 12L                                            |
| Anode Contact                                                    | J1-21                                          |
| Anode Contact Aligns with Center                                 |                                                |
| Line through Pin #6 $\pm$ 30°                                    |                                                |

#### GRID DRIVE SERVICE

*Voltag es are positive with respect to cathode unless indicated otherwise.*

#### MAXIMUM RATINGS (Design Maximum Values)

|                                         |                                   |
|-----------------------------------------|-----------------------------------|
| Anode Voltage (Note 2)                  | 25,000 Max. Volts DC              |
| Grid #4 Voltage                         | - 550 Min. to +1100 Max. Volts DC |
| Grid #2 Voltage                         | 550 Max. Volts DC                 |
| Grid #1 Voltage                         |                                   |
| Negative-Bias Value                     | 155 Max. Volts DC                 |
| Negative-Peak Value                     | 220 Max. Volts                    |
| Positive-Bias Value                     | 0 Max. Volts DC                   |
| Positive-Peak Value                     | 2 Max. Volts                      |
| Peak-Heater-Cathode Voltage             |                                   |
| Heater Negative with Respect to Cathode |                                   |
| During Warm-up Period not to Exceed     |                                   |
| 15 Seconds                              | 450 Max. Volts                    |
| After Equipment Warm-up Period          | 200 Max. Volts                    |
| Heater Positive with Respect to Cathode | 200 Max. Volts                    |

#### TYPICAL OPERATING CONDITIONS

|                           |                       |
|---------------------------|-----------------------|
| Anode Voltage             | 20,000 Volts DC       |
| Grid #4 Voltage for Focus | 0 to 400 Volts DC     |
| Grid #2 Voltage           | 300 Volts DC          |
| Grid #1 Voltage (Note 3)  | - 35 to - 72 Volts DC |

#### MAXIMUM CIRCUIT VALUES

|                            |                |
|----------------------------|----------------|
| Grid #1 Circuit Resistance | 1.5 Max. Megs. |
|----------------------------|----------------|

#### CATHODE DRIVE SERVICE

*Voltag es are positive with respect to Grid #1 unless indicated otherwise*

#### MAXIMUM RATINGS (Design Maximum Values)

|                                         |                                   |
|-----------------------------------------|-----------------------------------|
| Anode Voltage (Note 2)                  | 25,000 Max. Volts DC              |
| Grid #4 Voltage                         | - 400 Min. to +1250 Max. Volts DC |
| Grid #2 Voltage                         | 700 Max. Volts DC                 |
| Cathode Voltage                         |                                   |
| Positive-Bias Value                     | 155 Max. Volts DC                 |
| Positive-Peak Value                     | 220 Max. Volts                    |
| Negative-Bias Value                     | 0 Max. Volts DC                   |
| Negative-Peak Value                     | 2 Max. Volts                      |
| Peak-Heater-Cathode Voltage             |                                   |
| Heater Negative with Respect to Cathode |                                   |
| During Warm-up Period not to Exceed     |                                   |
| 15 Seconds                              | 450 Max. Volts                    |
| After Equipment Warm-up Period          | 200 Max. Volts                    |
| Heater Positive with Respect to Cathode | 200 Max. Volts                    |

# 23BVP4

## TYPICAL OPERATING CONDITIONS


|                                 |                     |
|---------------------------------|---------------------|
| Anode Voltage .....             | 20,000 Volts DC     |
| Grid #4 Voltage for Focus ..... | 150 to 500 Volts DC |
| Grid #2 Voltage .....           | 300 Volts DC        |
| Grid #1 Voltage .....           | 0 Volts DC          |
| Cathode Voltage (Note 3) .....  | +34 to +60 Volts DC |

## MAXIMUM CIRCUIT VALUES

|                                  |                |
|----------------------------------|----------------|
| Grid #1 Circuit Resistance ..... | 1.5 Max. Megs. |
|----------------------------------|----------------|

## NOTES

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the rated heater voltage divided by the rated heater current.
2. Anode, Grid #3 and Grid #5 are connected together within the tube and are referred to herein as anode.
3. For visual extinction of the focused raster. For cutoff of the undeflected focus spot, the absolute value of the bias between cathode and grid will increase by about 5 volts.

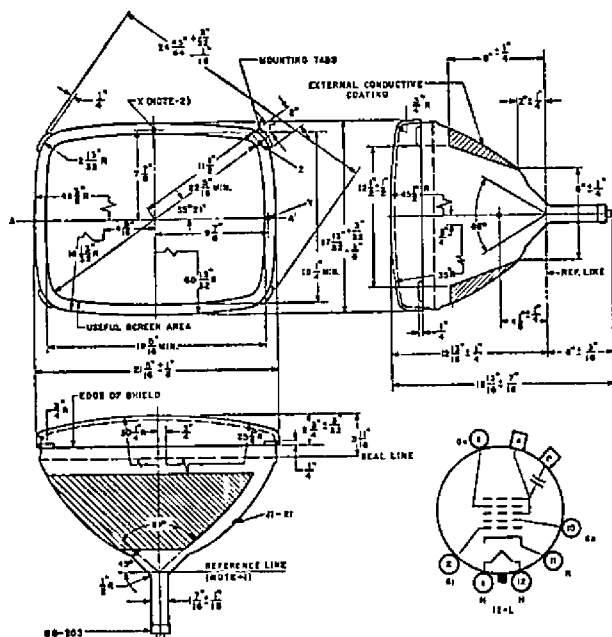

## DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JEDEC No. 116 Reference Line Gauge, when the gauge is seated against the bulb.
2. Planes perpendicular to tube axis and passing through points X, Y and Z are located as follows:

Plane tangent to crown of face to plane of X: .758" Nom.

Plane of X to plane of Y = .463" ± .030"

Plane of X to plane of Z = .970" ± .030"

## WARNING

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at anode voltages higher than 16,000 volts.

The information, diagrams, or any other data included herein are believed to be accurate and reliable. However, the Philco Corporation, Lansdale Division, assumes no responsibility or liability whatsoever for the application, interpretation or use made of such information, diagrams or data especially insofar as the use of said information, diagrams or data affects any patent, trademark or proprietary data rights.