

National Video Corporation

4300 W. 47TH STREET CHICAGO 32, ILLINOIS
CLIFFSIDE 4-5600

The 23GJP4 is a 23"-110° banded tube with a 4 1/2" neck length, this has a straight gun which requires no ion trap. A 450 milliamperere 6.3 volt filament and 50 volt G₂ for cathode drive design.

ELECTRICAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (Approximate)	
Diagonal	110 Degrees
Horizontal	99 Degrees
Vertical	82 Degrees
Direct Interelectrode Capacitances	
Cathode to all other electrodes (approx.)	5 uuf
Grid No. 1 to all other electrodes (approx.)	6 uuf
External conductive coating to anode (Note 1)	2,500 max. uuf
	1,700 min. uuf
Resistance Between External Conductive Coating and	
Implosion Protection Hardware	50 min. megohms
Heater Current at 6.3 Volts	450 $\pm$ 20 ma
Heater Warm-up Time	11 seconds
Electron Gun	
Ion Trap	None
Focus Lens	Unipotential

OPTICAL DATA

Phosphor Number	P4 Aluminized
Light Transmittance at Center (approximate)	42 Percent
Antireflection Treatment	None

MECHANICAL DATA

Overall Length	14 1/4 $\pm$ 1/4 Inches
Neck Length	4 1/2 $\pm$ 1/8 Inches
Greatest Dimensions of Tube	
Diagonal	23 1/2 $\pm$ 1/8 Inches
Width	20 5/8 $\pm$ 1/8 Inches
Height	16 5/8 $\pm$ 1/8 Inches
Minimum Useful Screen Dimensions (Projected)	
Diagonal	22 5/16 Inches
Horizontal Axis	19 1/4 Inches
Vertical Axis	15 1/8 Inches
Area	282 Sq. Inches

MECHANICAL DATA (Cont.)

Implosion Protection		Banded - Without Cloth
Bulb	JEDEC Designation	J-187-K1
Bulb Contact	JEDEC Designation	J1-21
Base	JEDEC Designation	B7-208
Basing	JEDEC Designation	8HR
Bulb Contact Alignment		
J1-21 contact aligns with Pin Position No. 4 $\pm 30^\circ$.		

RATINGS (Design Maximum System)

Unless otherwise specified, voltage values are positive and measured with respect to Grid No. 1.

Maximum Anode Voltage	22,000 volts
Minimum Anode Voltage	11,000 volts
Maximum Grid No. 4 (Focusing Electrode) Voltage	+1,250 -400 volts
Maximum Grid No. 2 Voltage	70 volts
Minimum Grid No. 2 Voltage	40 volts
Cathode Voltage	
Maximum negative value	0 volts dc
Maximum negative peak value	2 volts
Maximum positive value	154 volts dc
Maximum positive peak value	220 volts
Maximum Heater Voltage	6.9 volts
Minimum Heater Voltage	5.7 volts
Maximum Heater-Cathode Voltage	
Heater negative with respect to cathode	
During warm-up period not to exceed 15 seconds	450 volts
After equipment warm-up period	200 volts
Heater positive with respect to cathode	200 volts

TYPICAL OPERATING CONDITIONSCATHODE DRIVE SERVICE

Unless otherwise specified, all voltage values are positive with respect to Grid No. 1.

Anode Voltage	18,000 volts dc
Grid No. 4 Voltage (Focusing Electrode)	200 volts dc
(note 3 & 4)	
Grid No. 2 Voltage	50 volts dc
Cathode Voltage (Note 2)	32 to 50 volts dc

MAXIMUM CIRCUIT VALUES




Maximum Grid No. 1 Circuit Resistance	1.5 megohms
---------------------------------------	-------------

GRAPHS AND DRAWINGS

Tube Outline with Essential Dimensions and Tolerances

ULTOR RECESSED SMALL
CAVITY CAP JEDEC J1-21


NOTE 1

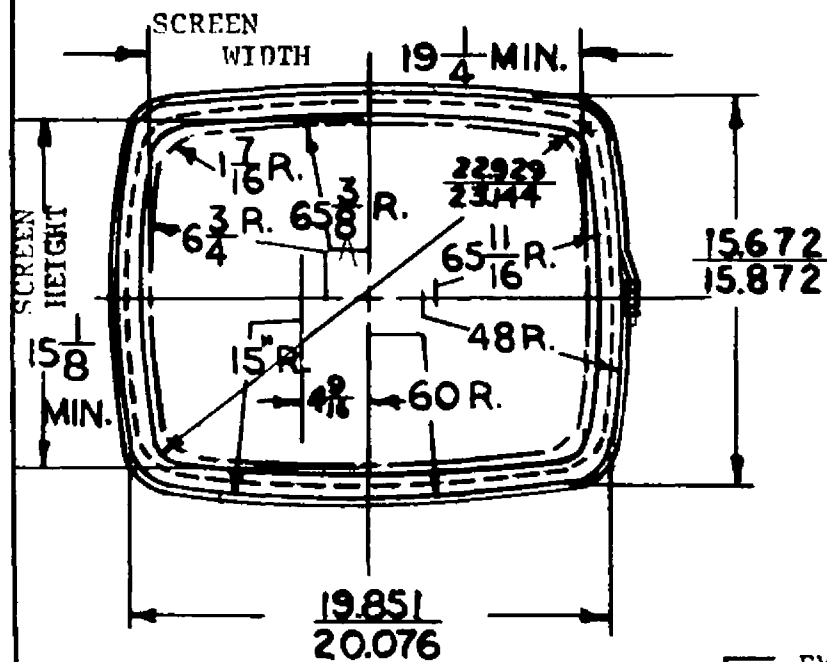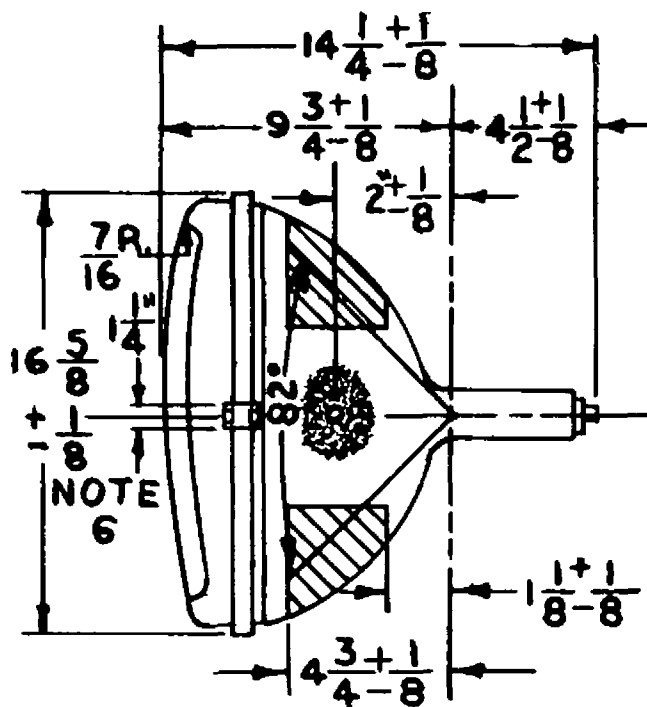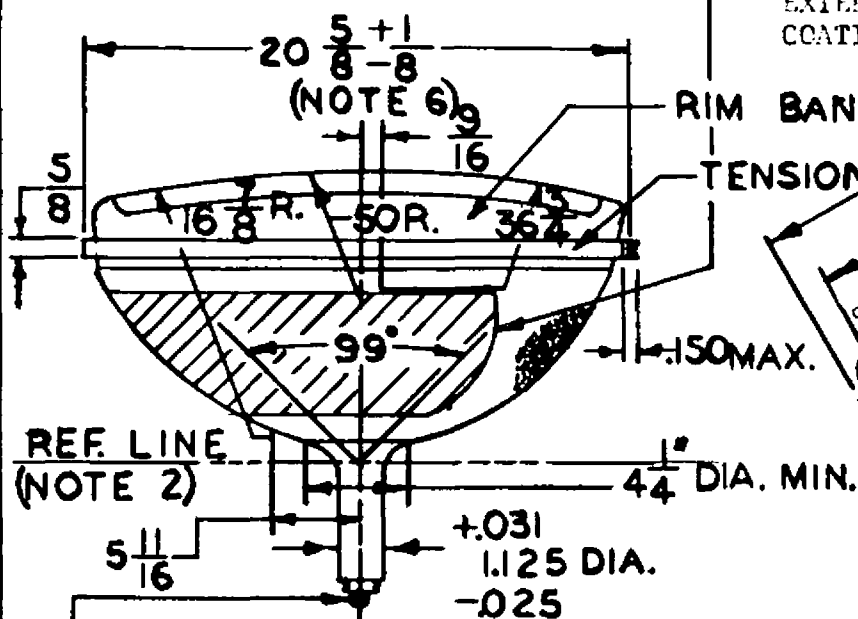

EXTERNAL CONDUCTIVE
COATING NOTE 4

NOTE 6

SMALL BUTTON NEOEIGHTAR 7 PIN BASE
ARRANGEMENT 1 JEDEC #B7-208 Note 3

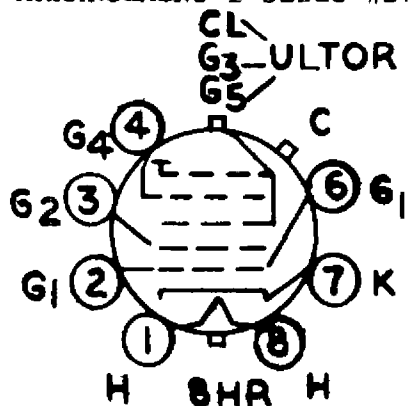

- PIN 1: HEATER
- PIN 2: GRID NO. 1
- PIN 3: GRID NO. 2
- PIN 4: GRID NO. 4
- PIN 6: GRID NO. 1
- PIN 7: CATHODE
- PIN 8: HEATER
- CAP: ULTOR (GRID NO. 3 GRID NO. 5 COLLECTOR)
- C: EXTERNAL CONDUCTIVE COATING

TRANSPARENT
INSULATING
COATING
NOTE 5

DRAWN BY	SCALE	EFFECTIVE	DISTRIBUTION	DRAWING NO.
W.C. GRAF	CX	3-50-64		23 GJP4

GRAPHS AND DRAWINGS (CONT.)

Pin Connections:

Pin 1	Heater	Pin 6	Grid No. 1
Pin 2	Grid No. 1	Pin 7	Cathode
Pin 3	Grid No. 2	Pin 8	Heater
Pin 4	Grid No. 4		

NOTES:

1. Measured with implosion protection hardware connected to external coating.
2. Visual extinction of focused raster.
3. With the combined Grid No. 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 19 1/4" by 15 1/8" pattern from RCA 2F21 monoscope or equivalent.
4. Individual tubes will have satisfactory focus at some value between 0 and +400 volts.

NOTES FOR DIMENSIONAL OUTLINE

1. The plane through the tube axis and Pin No. 4 may vary from the plane through the tube axis and ultor terminal by angular tolerance (measured about the tube axis) of $\pm 30^\circ$. Ultor terminal is on same side as Pin No. 4.
2. With tube neck inserted through flared end of reference-line gauge JEDEC No. G-126 and with tube seated in gauge, the reference-line is determined by the intersection of the Plane CC' of the gauge with the glass funnel.
3. Socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely. The design of the socket should be such that the circuit wiring cannot impress lateral strains through the socket contacts on the base pins. Bottom circumference of base wafer will fall within a circle concentric with bulb axis and having a diameter of 1 3/4".
4. External conductive coating must be grounded.
5. To clean this area, wipe only with soft dry lint-less cloth.
6. Measured to include a rimband and tension strap.