



Air Blast Cooled Pentode

5J/180E

CATHODE.

Thoriated tungsten filament

Voltage	10	V
Nominal current	28	A
Peak emission	12	A

RATING.

Mutual conductance	$\left\{ \begin{array}{l} \text{Measured at} \\ V_a \text{ 6kV } V_{g_2} \text{ 1.5kV} \\ I_a \text{ 0.5A} \end{array} \right\}$	5	mA/V
Screen grid μ	$\left\{ \begin{array}{l} V_a \text{ 1.5kV } V_{g_2} \text{ 1.5kV} \\ I_a \text{ 0.5A} \end{array} \right\}$	6	

INTER-ELECTRODE CAPACITIES.

Grid to anode	0.6	pF
Input	32	pF
Output	21	pF

AIR BLAST.

For an anode dissipation of 3.5kW

Volume of air 220 cu. ft./min.

Velocity of air 2,300 ft./min.

at a pressure of 1in. SWG.

DIMENSIONS.

Maximum overall length	245	mm.
Maximum diameter over cooler	155	mm.
Net weight	6.8	kg.

MAXIMUM RATINGS.

Maximum direct anode voltage	6	kV
Maximum direct anode current	1.5	A
Maximum anode dissipation	3.5	kW
Maximum direct screen voltage	1.5	kV
Maximum direct screen current	0.25	A
Maximum freq. for above ratings	25	Mc/s

Tentative data.

June 1946

5J/180E—1

Air Blast Cooled Pentode

5J/180E



TYPICAL OPERATING CONDITIONS. RADIO FREQUENCY.

Class B Power Amplifier. Modulated carrier applied to grid.

(Carrier conditions per valve for use with 100% modulation).

Direct anode voltage	6	kV
Grid bias	—250	V
Direct anode current	0.8	A
Direct screen voltage	1,500	V
Peak RF grid voltage	750	V
Peak RF grid current	0.33	A
*Direct grid current	25	mA approx.
Power output	1.4	kW approx.

Class C Power Amplifier. Anode subject to modulation.

(Carrier conditions per valve for use with 100% modulation).

Direct anode voltage	5	kV
Grid bias	—1,000	V
Direct anode current	1.2	A
Direct screen voltage	1.5	kV
Peak RF grid voltage	1.5	kV
Peak RF grid current	0.36	A
*Direct grid current	46	mA
Power output	3.8	kW approx.

Class C Power Amplifier or Oscillator unmodulated. For operation up to 25 Mc/s.

Direct anode voltage	6	kV
Grid bias	—500	V
Direct anode current	1.15	A
Direct screen voltage	1,400	V
Direct screen current	0.2	A
Direct suppressor voltage	200	V
Peak RF grid voltage	1	kV
*Direct grid current	90	mA approx.
Power output	5	kW approx.

* Subject to wide variation depending upon the impedance of the load circuit.

Tentative data.


June 1946

5J/180E—2



Air Blast Cooled Pentode


5J/180E

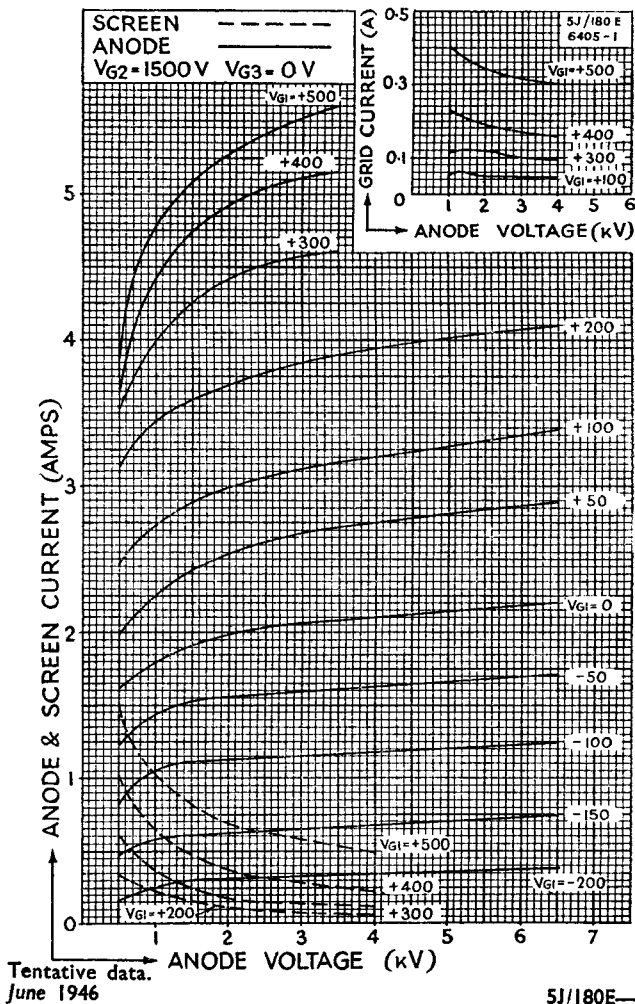

5J/180E

Air Blast Cooled Pentode


5J/180E



LOCATING PIN
ON RADIATOR

BASING

- | | |
|---|----------|
| 1 | GRID 3 |
| 2 | FILAMENT |
| 3 | GRID 2 |
| 4 | FILAMENT |
| 5 | GRID 3 |
| 6 | GRID 1 |

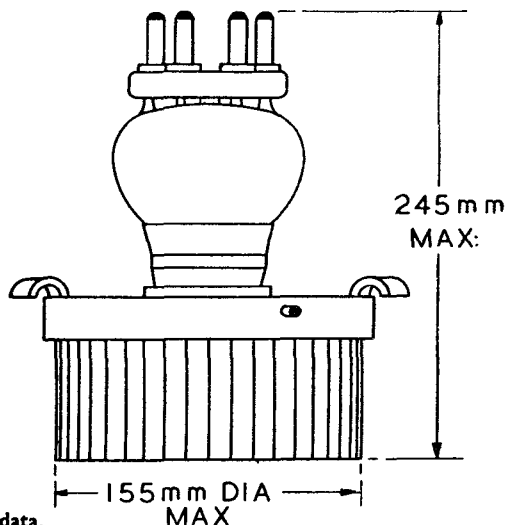

Tentative data.
June 1946

5J/180E—4