

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (Approx.)	
Horizontal	99 Degrees
Diagonal	110 Degrees
Vertical	82 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Bonded Shield
(Gray Filter Glass Safety Plate	
Laminated Directly to Face of Tube)	
Light Transmittance of Face plate Assembly (Approx.)	40 Percent
23 AVP4 and 23AYP4: External Surface of Safety Plate	
Treated to Reduce Specular Reflection	

ELECTRICAL DATA

	23AYP4	23CP4
	23SP4	23AVP4
Heater Voltage	6.3	6.3 Volts
Heater Current $\pm 5\%$	0.30	0.60 Ampere
Heater Warm-up Time ¹		11 Seconds
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes		5 μmf
Grid No. 1 to All Other Electrodes		6 μmf
External Conductive Coating to Anode ²		2500 μmf Max.
		2000 μmf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	
Height	15 1/4 Inches
Width	19 5/16 Inches
Diagonal	22 5/16 Inches
Area	282 Sq. Inches
Neck Length	5 1/8 $\pm$ 1/8 Inches
Overall Length	15 3/16 $\pm$ 3/8 Inches
Bulb	J187A or Equiv.
Safety Plate (23CP4, 23SP4)	FP198A
Safety Plate (23AVP4, 23AYP4)	FP198B
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B7-208
Basing	8HR
Weight (Approx.)	32 1/2 Pounds


RATINGS

MAXIMUM RATINGS (Design Maximum Values) Grid Drive Service

Anode Voltage	22,000 Volts	dc
Grid No. 4 Voltage (Focusing Electrode)	-550 to +1100 Volts	dc
Grid No. 2 Voltage	550 Volts	dc
Grid No. 1 Voltage		
Negative Bias Value	155 Volts	dc
Negative Peak Value	220 Volts	
Positive Bias Value	0 Volts	dc
Positive Peak Value	2 Volts	

QUICK REFERENCE DATA

Television Picture Tube
23" Direct Viewed
Rectangular Glass Type
Spherical Faceplate
Bonded Shield
Gray Filter Glass
Aluminized Screen
Electrostatic Focus
110° Magnetic Deflection
No Ion Trap
External Conductive Coating
23 AVP4 & 23AYP4: Anti
Reflection Treated
23SP4 & 23AYP4: 6.3 V,
300 Ma Heaters



SYLVANIA ELECTRONIC TUBES

A Division of
Sylvania Electric Products Inc.

PICTURE TUBE OPERATIONS SENECA FALLS, NEW YORK

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

MAY, 1961

PAGE 1 OF 3

File Under
TELEVISION PICTURE TUBES

MAXIMUM RATINGS (Design Maximum Values) Grid Drive Service (Continued)

Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode		
During Warm-up Period not to Exceed 15 Seconds	450 Volts	
After Equipment Warm-up Period	200 Volts	
Heater Positive with Respect to Cathode	200 Volts	

TYPICAL OPERATING CONDITIONS (Grid Drive Service)

Anode Voltage	16,000 Volts	dc
Grid No. 4 Voltage for Focus	0 to +400 Volts	dc
Grid No. 2 Voltage	300 Volts	dc
Grid No. 1 Voltage Required for Cutoff ³	-35 to -72 Volts	dc

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
---	------------------

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

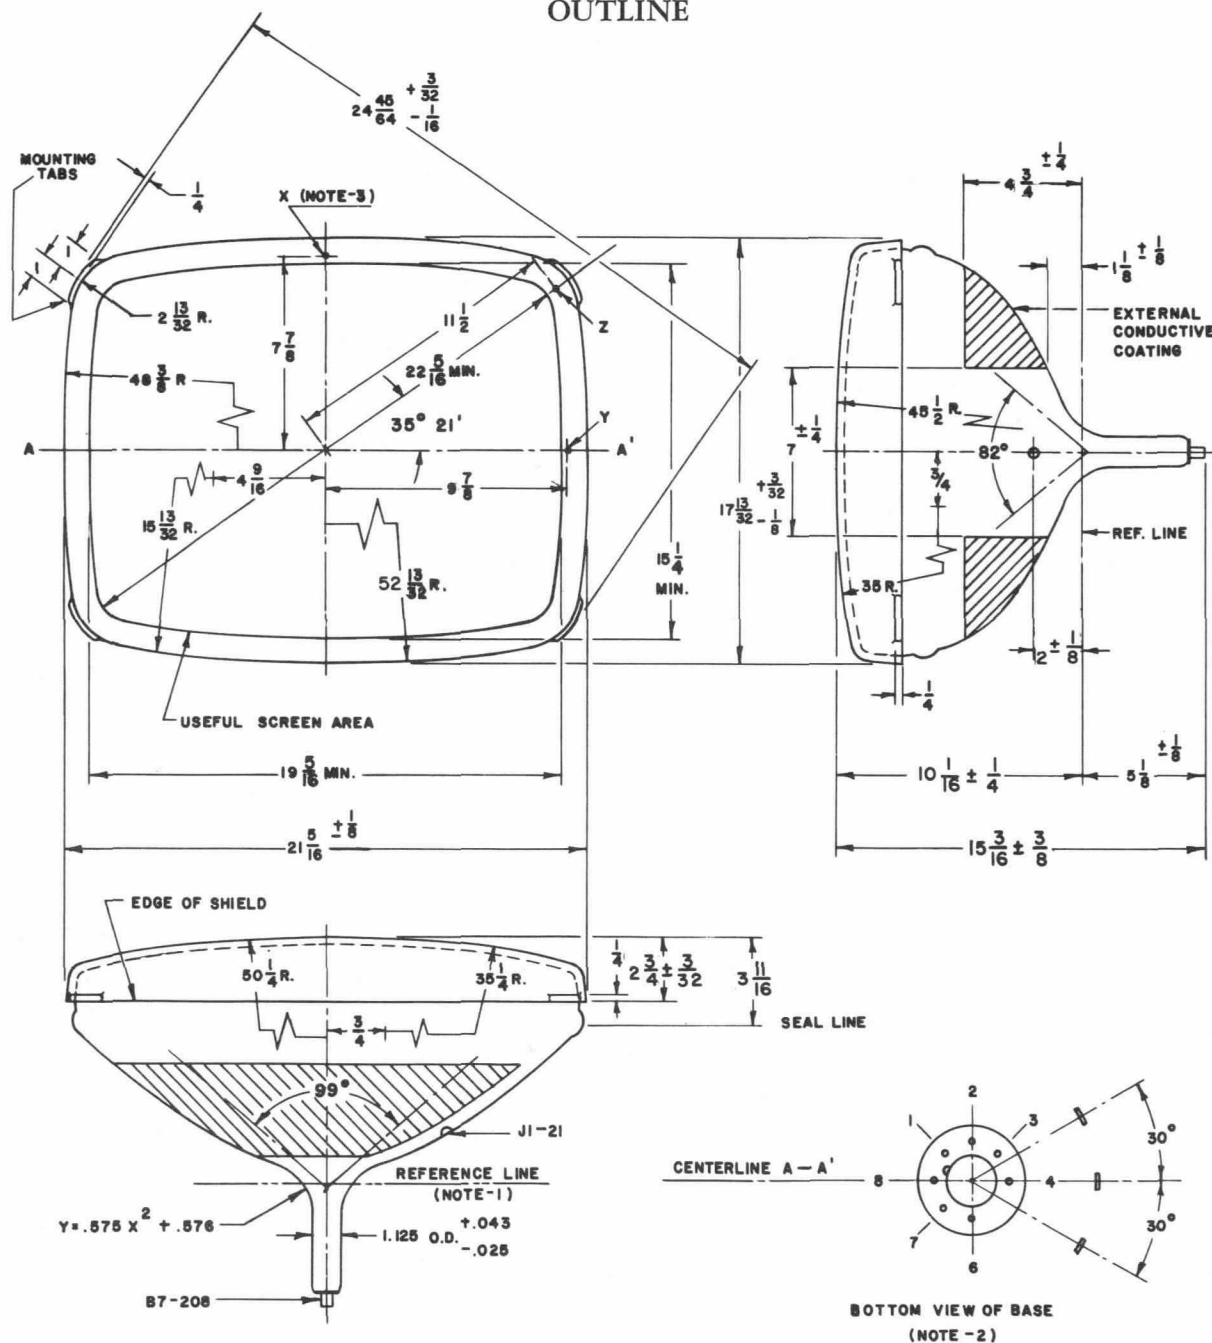


DIAGRAM NOTES:

D59028A

- Reference line is determined by plane C-C' of JEDEC No. 126 Reference Line Gauge, when the gauge is seated against the bulb.
- Base Pin No. 4 aligns with horizontal centerline (A-A') within 30° and is on same side as anode contact, J1-21.
- Planes perpendicular to tube axis and passing through X, Y, and Z are located as follows:
 - Plane tangent to crown of face to plane of X: .758" Nom.
 - Plane of X to plane of Y = $.463" \pm .030$
 - Plane of X to plane of Z = $.970" \pm .030$
- Dimensions are in inches.