



6521

6521

MAGNETRON

FORCED-AIR COOLED

Fixed Frequency: 5400 $\pm$ 20 Mc**GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage. 10 $\pm$ 10% . . . ac or dc volts

Current. 3.2 amp

Starting current: The maximum instantaneous starting current must never exceed 12 amperes, even momentarily.


Minimum Cathode Heating Time 5 minutes

Frequency. 5400 $\pm$ 20 McMaximum Frequency Pulling
at VSWR of 1.5/1 10 McMaximum Frequency Change with
Anode Temperature Change
(After warmup) 0.15 Mc/ $^{\circ}$ C**Mechanical:**

Dimensions and

Terminal Connections:

See Dimensional Outline

H - Heater
K - Cathode
P - Anode

Connector (For heater terminal

and heater-cathode terminal) . . . Ucinite* No. 115364
with built-in capacitor, or equivalent

Mounting Position. Any

Air Flow:

To Pins--An air stream should be directed along the cooling fins toward the body of the tube. The stream may be obtained from a rectangular nozzle about 3" x 1-1/2" located so that the plane through the 3" side is parallel with the plane of a cooling fin and so that the nozzle is centered on the body of the tube. Adequate flow should be provided so that the temperature of the anode block does not exceed 150 $^{\circ}$ C.

To Heater-Cathode Terminal--Adequate flow should be provided to maintain the temperature of the heater-cathode terminal below 165 $^{\circ}$ C.

Weight (Approx.) 11-1/2 lbs

PULSED OSCILLATOR SERVICE**Maximum and Minimum Ratings, Absolute Values:**

For Duty Cycle of 0.001 max.

PEAK ANODE VOLTAGE 16 max. kv

PEAK ANODE CURRENT { 16 max. amp
10 min. amp

PEAK POWER INPUT* 256 max. kw

* Manufactured by Ucinite Division of United-Carr Fastener Corporation, Newtonville 60, Massachusetts.

• For atmospheric pressures greater than 40 centimeters of mercury at 25 $^{\circ}$ C. Operation at pressures lower than 40 centimeters of mercury (altitudes higher than 16000 feet) may result in arcover with consequent damage to the tube.

MAY 1, 1955

TUBE DIVISION

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6521



6521

MAGNETRON

AVERAGE POWER INPUT.	0.256 max.	kw
PULSE DURATION	2.2 max.	μ sec
OPERATION TIME IN ANY 100-MICROSECOND INTERVAL	5 max.	μ sec
RATE OF RISE OF VOLTAGE PULSE.	{ 120 max. 80 min.	{ kv/ μ sec kv/ μ sec
ANODE BLOCK TEMPERATURE.	150 max.	$^{\circ}$ C
HEATER-CATHODE TERMINAL TEMPERATURE. . .	165 max.	$^{\circ}$ C
LOAD VOLTAGE STANDING-WAVE RATIO	1.5 max.	

**Typical Operation^a with Load Voltage Standing-Wave
Ratio Equal To or Less Than 1.05**

With Duty Cycle of 0.0008

Heater Voltage	See Operating Considerations	
Magnetic Field	Supplied by permanent magnet integral with tube	
Peak Anode Voltage (Approx.)	15	kv
Peak Anode Current	13.5	amp
Pulse Repetition Rate.	400	cps
Pulse Duration	2	μ sec
Maximum RF Bandwidth	1.5	Mc
Peak Power Output.	85	kw

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	2.8	3.6	amp
Peak Anode Voltage	2	14	16	kv
Peak Power Output.	2,3	75	-	kw
Pulses Missing From Total. . .	2,4	-	0.25	%

Note 1: With 10.0 volts ac on heater.

Note 2: With peak anode current of 13.5 amperes, and heater voltage reduced to 9.1 volts.

Note 3: With peak anode voltage of approximately 15 kilovolts, anode block temperature of approximately 100 $^{\circ}$ C, and maximum VSWR equal to or less than 1.05.

Note 4: Pulses are considered to be missing if the energy level at the operating frequency is less than 70 per cent of the normal value at a VSWR of 1.5, and with VSWR phase adjusted to produce maximum instability.

OPERATING CONSIDERATIONS

The waveguide output flange is designed for use with a standard 1" x 2" rectangular waveguide such as that designated by RETMA as WR 187, or that having the JAN designation RG-49/U, and mates with flanges such as Airtron[■] No. B54626 or equivalent.

^a It is essential that the input circuit be designed so that if arcing occurs the energy per pulse delivered to the tube cannot greatly exceed the normal energy per pulse. To satisfy this requirement, it is recommended that pulsers of the discharging-network type be used.

[■] Manufactured by Airtron, Inc., Linden, N. J.

MAY 1, 1955

TUBE DIVISION

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6521

6521

MAGNETRON

As soon as the 6521 begins to oscillate, the *heater voltage* should be reduced to 9.1 volts when it is operated under the typical operating conditions shown in the tabulated data. For other operating conditions, the heater voltage (E_f) should be reduced depending on the average power input (P_i) to the tube as follows:



P_i (watts)	E_f (volts)
up to 90	10.0
90 to 130	9.9
130 to 180	9.5
180 to 220	9.1
220 to 256	8.9

6521



6521

MAGNETRON

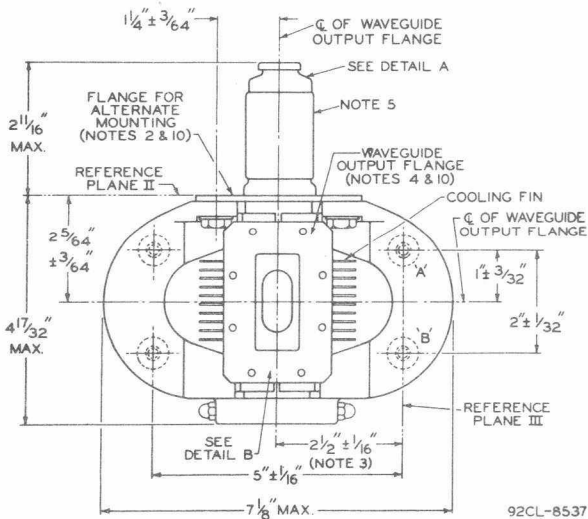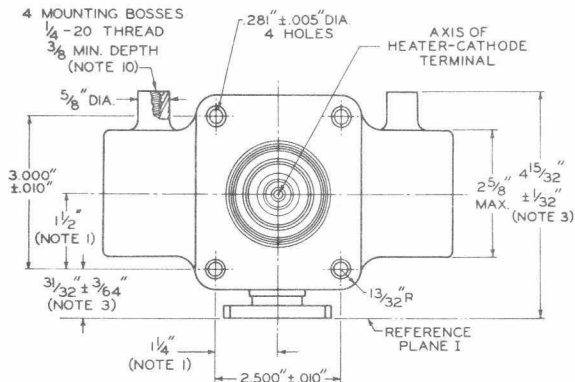

MAY 1, 1955

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-8537A




6521


6521

MAGNETRON

DETAIL A

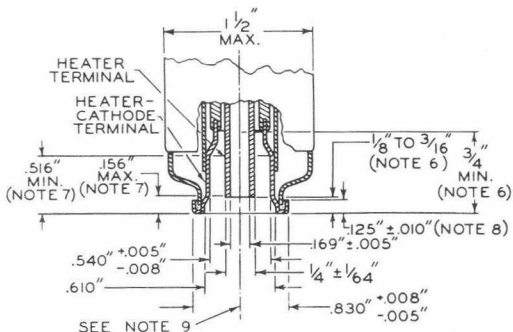

DETAIL B

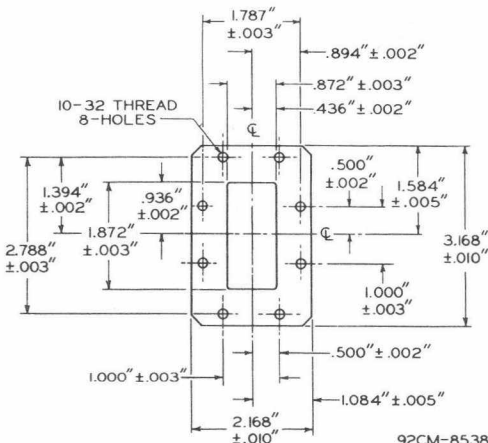

92CM-8538

Reference plane I is defined as that plane against which the waveguide output flange abuts.

Reference plane II is defined as that plane perpendicular to reference plane I and touching the surface of the flange for alternate mounting.

Reference plane III is defined as that plane perpendicular to reference plane I and passing through the exact centers of holes 'A' and 'B'.

MAY 1, 1955

TUBE DIVISION

CE-8538-8537B

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6521



6521

MAGNETRON

NOTE 1: The axis of the heater-cathode terminal will be within the confines of a cylinder whose radius is $3/64$ " and whose axis is perpendicular to reference plane *II* at the specified location.

NOTE 2: When resting on a smooth surface, this flange surface shall have a flatness such that a 0.050" thickness gauge $1/8$ " wide shall not enter between the two surfaces, and it shall be perpendicular to reference plane *I* within $\pm 2^\circ$.

NOTE 3: The tolerances include angular as well as lateral deviations.

NOTE 4: With the waveguide output flange resting on a plane surface, a 0.005" thickness gauge $1/8$ " wide shall not enter between the two surfaces.

NOTE 5: No part of the tube support fastened to the flange for alternate mounting should extend within the surface of a cylinder whose radius is $3/4$ " and whose axis is perpendicular to reference plane *II* at the specified location.

NOTE 6: These dimensions define extremities of the 0.169" internal diameter of the cylindrical heater terminal.

NOTE 7: These dimensions define extremities of the 0.540" internal diameter of the cylindrical heater-cathode terminal.

NOTE 8: No part of the connector device for the heater and heater-cathode terminals should bear against the underside of this lip.

NOTE 9: The heater terminal and heater-cathode terminal are concentric within 0.010".


NOTE 10: Connection to the anode may be made through the mounting bosses, the flange for alternate mounting, or the waveguide output flange.



6521

6521

TYPICAL STABILIZATION CHARACTERISTICS

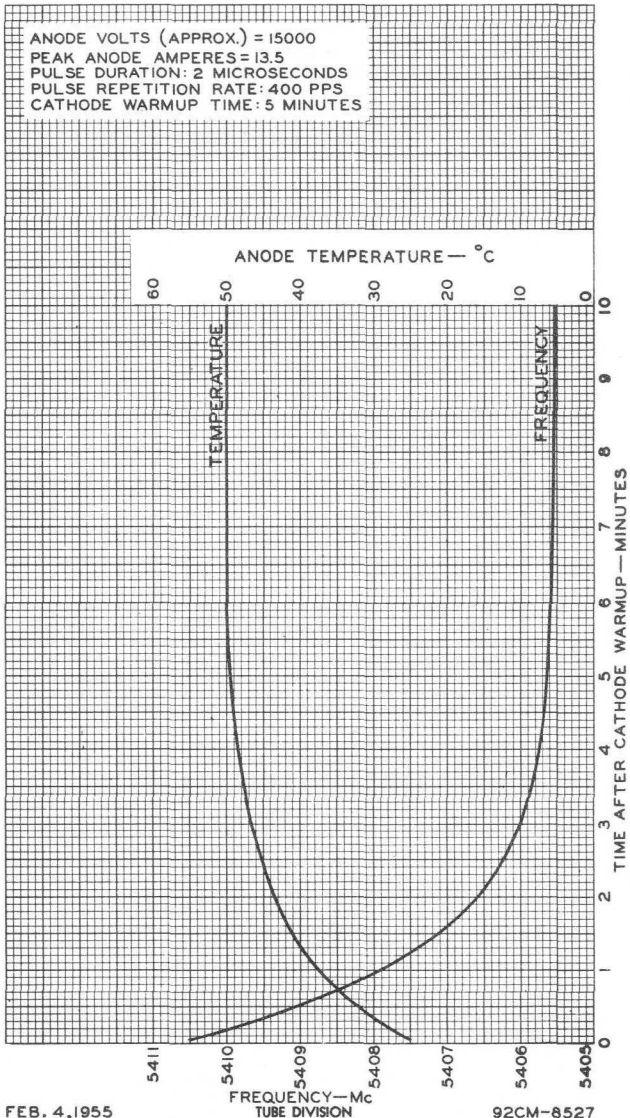

FEB. 4, 1955

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-8527

6521



6521

OPERATING REGION

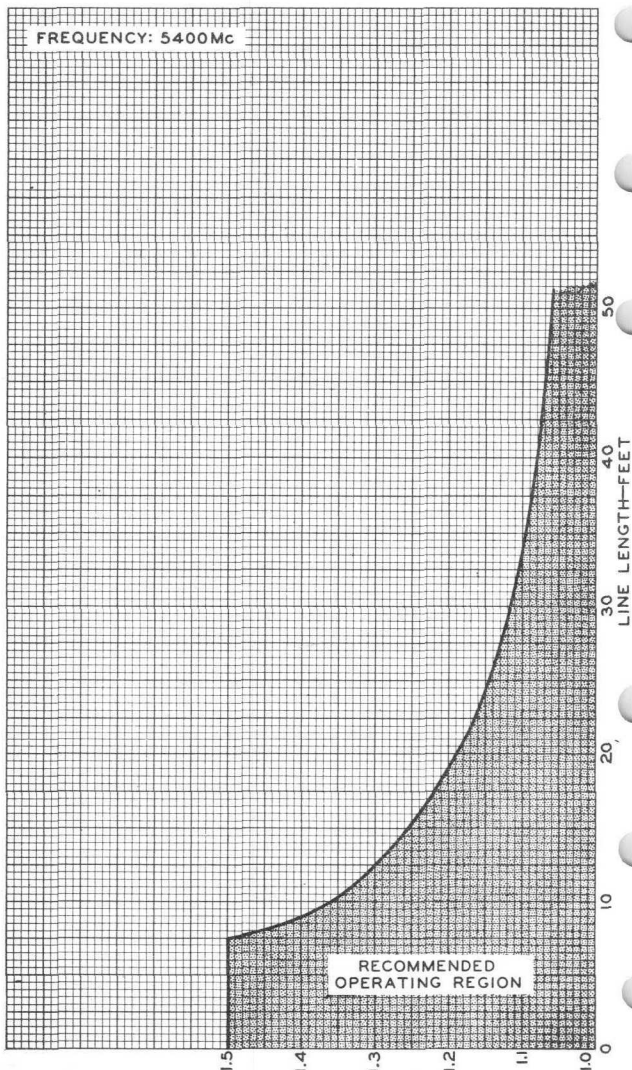

FEB. 4, 1955

TUBE DIVISION

92CM-8528

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




6521

6521

PERFORMANCE CHART

OPERATING FREQUENCY: 5400 ± 20 Mc
PULSE DURATION: 2 MICROSECONDS
PULSE REPETITION RATE: 400 PPS
TUBE OPERATING INTO MATCHED LOAD

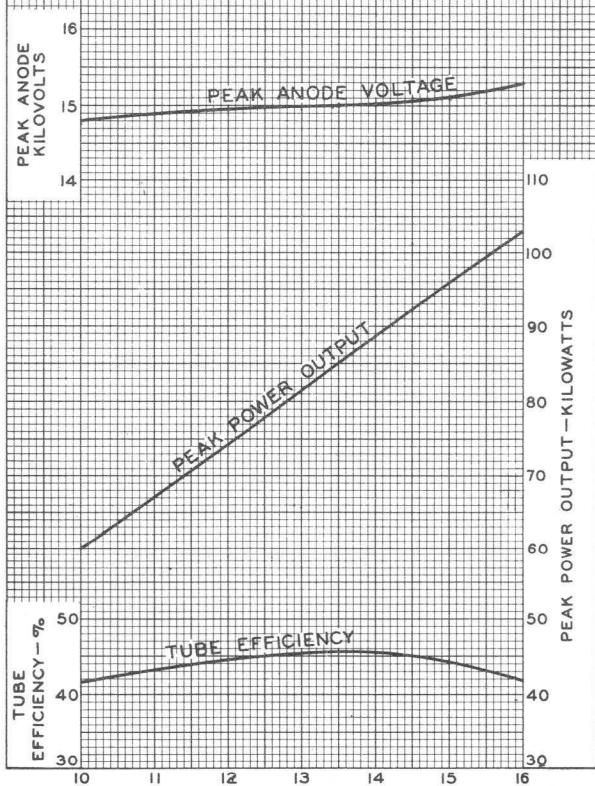

FEB. 8, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8533

