

Beam Power Tube

9-PIN MINIATURE TYPE For High-Fidelity Audio- Amplifier Applications

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC) 6.3 $\pm$ 10% volts

Current at 6.3 volts. 0.45 amp

Direct Interelectrode Capacitances:^o

Grid No.1 to plate. 0.4 max. μ f

Grid No.1 to cathode & grid No.3,
grid No.2, and heater 9 μ f

Plate to cathode & grid No.3,
grid No.2, and heater 6 μ f

Characteristics, Class A₁ Amplifier:

Plate Voltage 250 volts

Grid-No.2 Voltage 250 volts

Grid-No.1 Voltage -15 volts

Plate Resistance (Approx.) 73000 ohms

Transconductance. 4800 μ hos

Plate Current 46 ma

Grid-No.2 Current 3.5 ma

Grid-No.1 Voltage (Approx.) for
plate μ a = 100. -40 volts

Mechanical:

Operating Position. Any

Maximum Overall Length. 3-1/16"

Maximum Seated Length 2-13/16"

Length, Base Seat to Bulb Top (Excluding tip) 2-7/16" $\pm$ 3/32"

Maximum Diameter. 0.750" to 0.875"


Dimensional Outline See General Section

Bulb. T6-1/2

Base. Small-Button Noval 9-Pin (JEDEC No.E9-1)

Basing Designation for BOTTOM VIEW. 9EU

Pin 1-Grid No.2
Pin 2-No Connection
Pin 3-Grid No.1
Pin 4-Heater
Pin 5-Heater



Pin 6-Grid No.1
Pin 7-Grid No.3,
Cathode
Pin 8-Grid No.2
Pin 9-Plate

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE 440 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE 330 max. volts

← Indicates a change.



GRID-No.2 INPUT.	2	max.	watts
PLATE DISSIPATION.	12	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode.	200	max.	volts
Heater positive with respect to cathode.	200 [▲]	max.	volts
BULB TEMPERATURE (At hottest point			
on bulb surface)	250	max.	°C

Typical Operation with Fixed Bias:

Values are for 2 tubes

Plate Voltage.	250	350	400	volts
Grid-No.2 Voltage.	250	280	290	volts
Grid-No.1 (Control-Grid) Voltage [●]	-15	-22	-25	volts
Peak AF Grid-No.1-to-Grid-No.1				
Voltage.	30	44	50	volts
Zero-Signal Plate Current.	92	58	50	ma
Max.-Signal Plate Current.	105	106	107	ma
Zero-Signal Grid-No.2 Current.	7	3.5	2.5	ma
Max.-Signal Grid-No.2 Current.	16	14	13.7	ma
Effective Load Resistance (Plate				
to plate).	8000	7500	8000	ohms
Total Harmonic Distortion.	2	1.5	2	%
Max.-Signal Power Output	12.5	20	24	watts

Typical Operation with Cathode Bias:

Values are for 2 tubes

Plate Supply Voltage	300	310	volts
Grid-No.2 Supply Voltage	300	310	volts
Cathode Resistor	230	270	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage .	48	55	volts
Zero-Signal Plate Current.	80	77	ma
Max.-Signal Plate Current.	96	92	ma
Zero-Signal Grid-No.2 Current.	6	5	ma
Max.-Signal Grid-No.2 Current.	14	14	ma
Effective Load Resistance (Plate to plate).	5500	6000	ohms
Total Harmonic Distortion.	2	4	%
Max.-Signal Power Output	15	17	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:[●]

For fixed-bias operation	0.5 max.	megohm
For cathode-bias operation	1 max.	megohm

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

*Grid No.2 of each tube connected to tap
on plate winding of output transformer*

→ Maximum Ratings, Design-Maximum Values:

PLATE AND GRID-No.2 (SCREEN-GRID)

SUPPLY VOLTAGE	410 max.	volts
--------------------------	----------	-------

→ Indicates a change.



6973

6973

BEAM POWER TUBE

9-PIN MINIATURE TYPE

*For high-fidelity audio-amplifier applications***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.45 amp

Direct Interelectrode Capacitances:^oGrid No.1 to plate 0.7 max. μf Grid No.1 to cathode & grid No.3,
grid No.2, and heater. 8 μf Plate to cathode & grid No.3,
grid No.2, and heater 8.5 μf **Characteristics, Class A₁ Amplifier:**

Plate Voltage. 250 volts

Grid-No.2 (Screen-Grid) Voltage. 250 volts

Grid-No.1 (Control-Grid) Voltage. -15 volts

Plate Resistance (Approx.) 73000 ohms

Transconductance 4800 μmhos

Plate Current. 46 ma

Grid-No.2 Current. 3.5 ma

Grid-No.1 Voltage (Approx.) for
plate current of 100 μa -40 volts**Mechanical:**

Operating Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length. 2-3/8"

Length, Base Seat to Bulb Top (Excluding tip). 2" $\pm$ 3/32"

Maximum Diameter 7/8"

Dimensional Outline. See General Section

Bulb T6-1/2

Base Small-Button Noval 9-Pin (JETEC No.E9-1)

Basing Designation for BOTTOM VIEW 9EU


Pin 1-Grid No.2

Pin 2-No Connection

Pin 3-Grid No.1

Pin 4-Heater

Pin 5-Heater



Pin 6-Grid No.1

Pin 7-Grid No.3,

Cathode

Pin 8-Grid No.2

Pin 9-Plate

PUSH-PULL AF POWER AMPLIFIER — Class AB₁**Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE. 400 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE. 300 max. volts

GRID-No.2 INPUT. 2 max. watts

PLATE DISSIPATION. 12 max. watts

^o: See next page.



BEAM POWER TUBE

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode 200 max. volts

Heater positive with respect to cathode 200[▲] max. volts

BULB TEMPERATURE (At hottest point on bulb surface) 250 max. °C

Typical Operation with Fixed Bias:

Values are for 2 tubes

Plate Voltage. 250 350 400 volts

Grid-No.2 Voltage. 250 280 290 volts

Grid-No.1 (Control-Grid) Voltage[●]. . . -15 -22 -25 volts

Peak AF Grid-No.1-to-Grid-No.1 Voltage. 30 44 50 volts

Zero-Signal Plate Current. 92 58 50 ma

Max.-Signal Plate Current. 105 106 107 ma

Zero-Signal Grid-No.2 Current. 7 3.5 2.5 ma

Max.-Signal Grid-No.2 Current. 16 14 13.7 ma

Effective Load Resistance (Plate to plate). 8000 7500 8000 ohms

Total Harmonic Distortion. 2 1.5 2 %

Max.-Signal Power Output 12.5 20 24 watts

Typical Operation with Cathode Bias:

Values are for 2 tubes

Plate-Supply Voltage 300 310 volts

Grid-No.2 Supply Voltage 300 310 volts

Cathode Resistor 230 270 ohms

Peak AF Grid-No.1-to-Grid-No.1 Voltage . . . 48 55 volts

Zero-Signal Plate Current. 80 77 ma

Max.-Signal Plate Current. 96 92 ma

Zero-Signal Grid-No.2 Current. 6 5 ma

Max.-Signal Grid-No.2 Current. 14 14 ma

Effective Load Resistance (Plate to plate). 5500 6000 ohms

Total Harmonic Distortion. 2 4 %

Max.-Signal Power Output 15 17 watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:[●]

For fixed-bias operation 0.5 max. megohm

For cathode-bias operation 1 max. megohm

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

Grid No.2 of each tube connected to tap on plate winding of output transformer

Maximum Ratings, Design-Center Values:

PLATE AND GRID-No.2 (SCREEN-GRID)

SUPPLY VOLTAGE 375 max. volts

○, ▲, ●: See next page.



6973

6973

BEAM POWER TUBE

GRID-No.2 INPUT.	1.75	max.	watts
PLATE DISSIPATION.	12	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode	200	max.	volts
Heater positive with respect to cathode	200 [▲]	max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)			
	250	max.	°C

Typical Operation:

Values are for 2 tubes

	Fixed Bias	Cathode Bias	
Plate-Supply Voltage	375	370	volts
Grid-No.2 Supply Voltage	*	*	volts
Grid-No.1 (Control-Grid) Voltage [•]	-33.5	-	volts
Cathode Resistor	-	355	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage.	67	62	volts
Zero-Signal Cathode Current.	62	74	ma
Max.-Signal Cathode Current.	95	84	ma
Effective Load Resistance (Plate to plate).	12500	13000	ohms
Total Harmonic Distortion.	1.5	1.2	%
Max.-Signal Power Output	18.5	15	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:[•]

For fixed-bias operation	0.5 max.	megohm
For cathode-bias operation	1 max.	megohm


[○] Without external shield.[▲] The dc component must not exceed 100 volts.[•] The type of input coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.^{*} Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to grid No.2 of each output tube.^{*} Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

6973



6973

AVERAGE PLATE CHARACTERISTICS

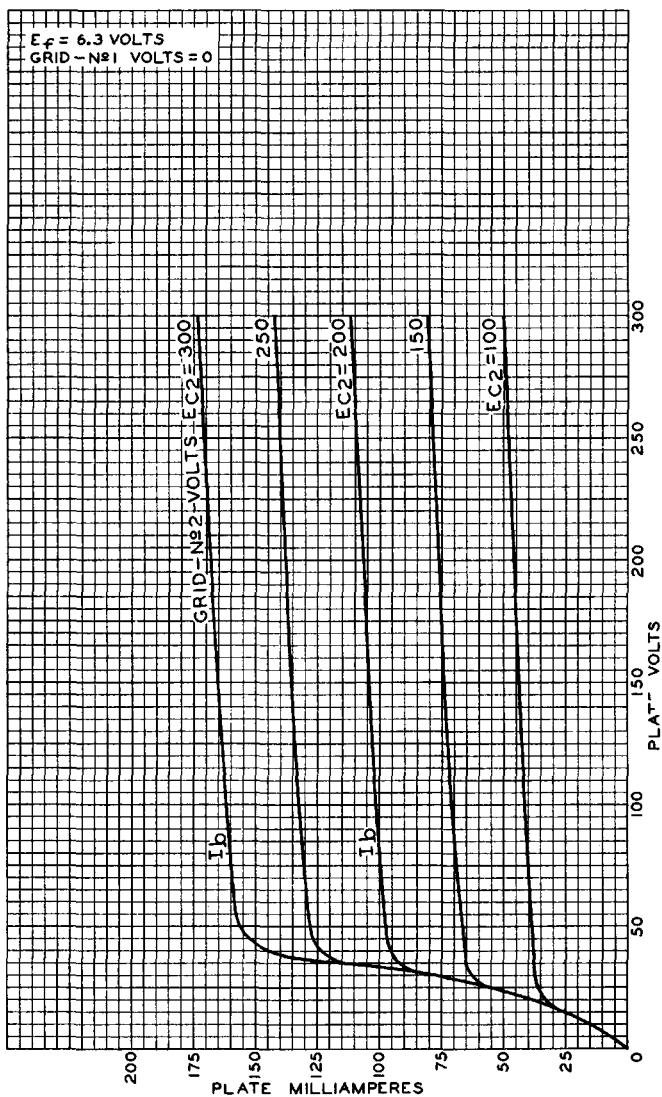

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM - 9380



6973

6973

AVERAGE CHARACTERISTICS

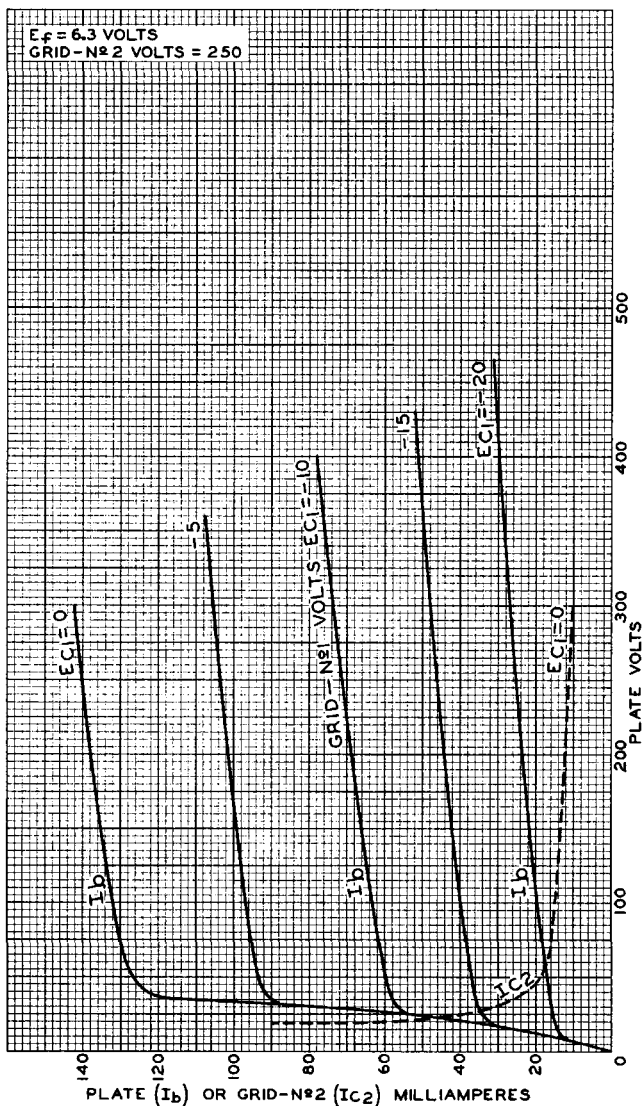


6973



6973

OPERATION CHARACTERISTICS PUSH-PULL CLASS AB₁ OPERATION

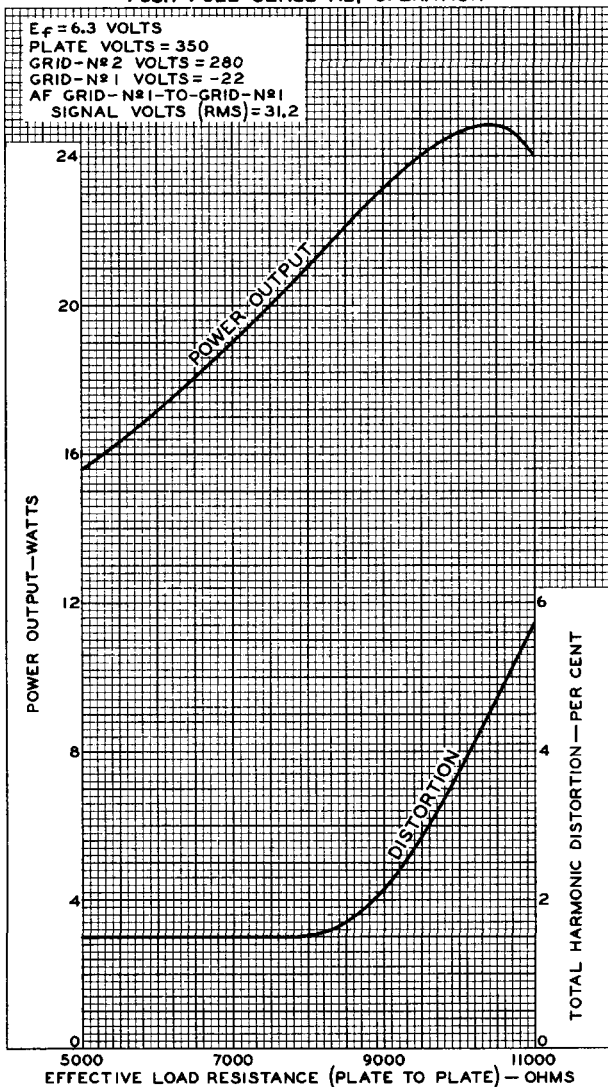

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9381