



6AK5

6AK5

SHARP-CUTOFF PENTODE

7-PIN MINIATURE TYPE

Useful at frequencies up to 400 Mc

GENERAL DATA**Electrical:**

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.175 amp

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield ⁰	
Grid No.1 to plate	0.03 max.	0.02 max.	μf
Grid No.1 to cathode & grid No.3 & internal shield, grid No.2, and heater	4	4	μf
Plate to cathode & grid No.3 & internal shield, grid No.2, and heater	2.1	2.8	μf

Characteristics, Class A₁ Amplifier:

Plate Voltage.	120	180	volts
Grid-No.2 (Screen) Voltage	120	120	volts
Cathode-Bias Resistor.	180	180	ohms
Plate Resistance (Approx.)	0.30	0.50	megohm
Transconductance	5000	5100	μmhos
Plate Current.	7.5	7.7	ma
Grid-No.2 Current.	2.5	2.4	ma
Grid-No.1 Voltage (Approx.) for plate current of 10 μamp	-8.5	-8.5	volts

Mechanical:


Mounting Position.	Any
Maximum Overall Length	1-3/4"
Maximum Seated Length.	1-1/2"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/8" $\pm$ 3/32"
Maximum Diameter	3/4"
Dimensional Outline.	See General Section
Bulb	T-5-1/2
Base	Small-Button Miniature 7-Pin (JETEC No.E7-1)

Basing Designation for BOTTOM VIEW 7BD

Pin 1-Grid No.1

Pin 2-Cathode,
Grid No.3,
Internal
Shield

Pin 3-Heater



Pin 4-Heater

Pin 5-Plate

Pin 6-Grid No.2

Pin 7-Same as
Pin 2⁰ With external shield JETEC No.316 connected to cathode.

← Indicates a change.

6AK5



6AK5

SHARP-CUTOFF PENTODE

AMPLIFIER - Class A₁

→ Maximum Ratings, Design-Center Values:

PLATE VOLTAGE.	180 max. volts
------------------------	----------------

GRID-No.2 (SCREEN) SUPPLY VOLTAGE.	180 max. volts
--	----------------

GRID-No.2 VOLTAGE.	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section
----------------------------	--

GRID-No.1 (CONTROL-GRID) VOLTAGE:	
-----------------------------------	--

Positive bias value.	0 max. volts
------------------------------	--------------

PLATE DISSIPATION.	1.7 max. watts
----------------------------	----------------

GRID-No.2 INPUT:	
------------------	--

For grid-No.2 voltages up to 90 volts. .	0.5 max. watt
--	---------------

For grid-No.2 voltages between 90	
-----------------------------------	--

and 180 volts.	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section
------------------------	--

CATHODE CURRENT.	18 max. ma
--------------------------	------------

PEAK HEATER-CATHODE VOLTAGE:	
------------------------------	--

Heater negative with respect to cathode.	120 max. volts
--	----------------

Heater positive with respect to cathode.	120 max. volts
--	----------------

→ Indicates a change.

SEPT. 1, 1955

TUBE DIVISION

DATA


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6AK5

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

6AK5

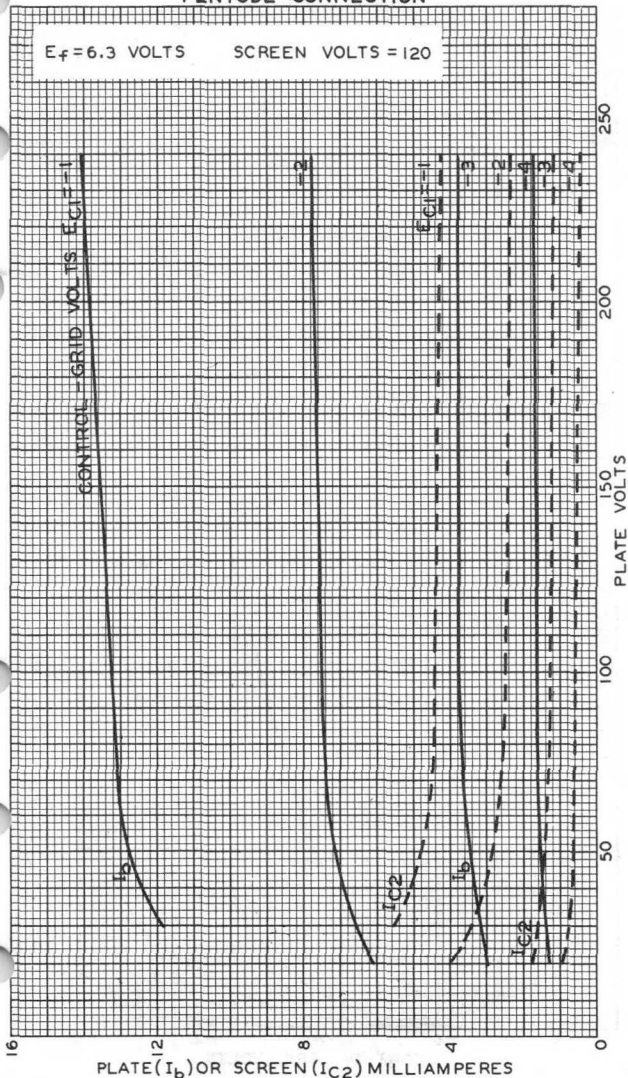

FEB. 15, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6504

6AK5




6AK5

AVERAGE CHARACTERISTICS PENTODE CONNECTION

 $E_f = 6.3$ VOLTS

CURVES	SCREEN VOLTS	PLATE VOLTS
—	120	180
- - -	75	180

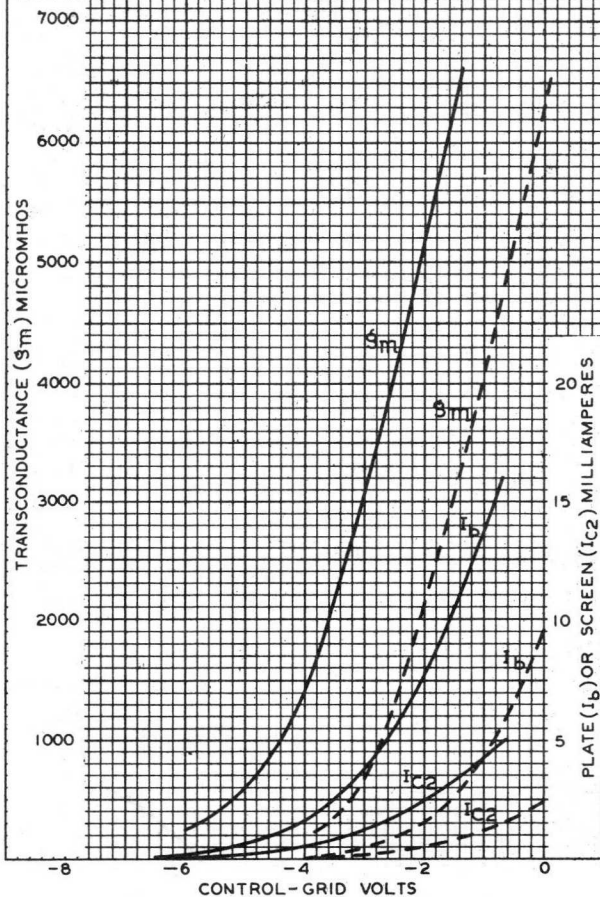

FEB. 19, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6505