



6AS7-GYB

TWIN TRIODE

6AS7-GYB

ET-T1618

Page 1

5-60

DESCRIPTION AND RATING

The 6AS7-GYB is a low- μ twin triode primarily designed for service as a series-regulator tube in d-c power supplies. The tube differs from the 6AS7-GA in having controlled zero-bias plate current and a low-loss phenolic base.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC 6.3 Volts

Heater Current 2.5 Amperes

Direct Interelectrode Capacitances, approximate†

Grid to Plate, Each Section 7.5 μ f

Input, Each Section 6.5 μ f

Output, Each Section 2.2 μ f

Heater to Cathode, Each Section 7.0 μ f

Grid to Grid 0.5 μ f

Plate to Plate 1.9 μ f

MECHANICAL

Mounting Position—Any

Envelope—T-12, Glass

Base—B8-110, Short Medium-Shell Octal 8-Pin Micanol

MAXIMUM RATINGS

DC AMPLIFIER SERVICE—DESIGN-CENTER VALUES, EACH SECTION

Plate Voltage 250 Volts

Plate Dissipation 13 Watts

DC Plate Current 125 Milliamperes

Heater-Cathode Voltage

Heater Positive with Respect to Cathode 300 Volts

Heater Negative with Respect to Cathode 300 Volts


Grid-Circuit Resistance

With Cathode Bias‡ 1.0 Megohms

Cont'd on Page 2

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

BASING DIAGRAM



EIA 88D

TERMINAL CONNECTIONS

Pin 1—Grid (Section 2)

Pin 2—Plate (Section 2)

Pin 3—Cathode (Section 2)

Pin 4—Grid (Section 1)


Pin 5—Plate (Section 1)

Pin 6—Cathode (Section 1)

Pin 7—Heater

Pin 8—Heater

PHYSICAL DIMENSIONS

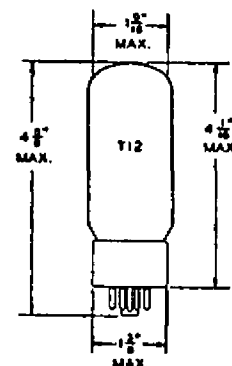

EIA 12-16

GENERAL  ELECTRIC

MAXIMUM RATINGS (Cont'd)
BOOSTER SCANNING SERVICE§—DESIGN-CENTER VALUES, EACH SECTION

Peak Inverse Plate Voltage.....	1700	Volts
Plate Dissipation.....	13	Watts
Plate Current.....	125	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode.....	300	Volts
Heater Negative with Respect to Cathode.....	300	Volts
Grid-Circuit Resistance		
With Cathode-Bias†.....	1.0	Megohms

Design-Center ratings are limiting values of operating and environmental conditions applicable to a bogey tube of a specified type as defined by its published data, and should not be exceeded under normal conditions.

These values are chosen by the tube manufacturer to provide acceptable serviceability of the tube in average applications, taking responsibility for normal changes in operating conditions due to rated supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all tubes.

The equipment manufacturer should design so that initially no design-center value for the intended service is exceeded with a bogey tube in equipment operating at the stated normal supply-voltage.

CHARACTERISTICS AND TYPICAL OPERATION
AVERAGE CHARACTERISTICS, EACH SECTION

Plate Voltage.....	40	135	Volts
Grid Voltage.....	0	—	Volts
Cathode-Bias Resistor.....	—	250	Ohms
Amplification Factor.....	—	2.0	
Plate Resistance, approximate.....	—	280	Ohms
Transconductance.....	—	7000	Micromhos
Plate Current.....	150	125	Milliamperes

INITIAL CHARACTERISTICS LIMITS

	Mini- mum	Maxi- mum	
Heater Current			
$E_f = 6.3$ volts.....	2.26	2.75	Amperes
Plate Current, Each Section			
$E_f = 6.3$ volts, $E_{bb} = 135$ volts, $R_k = 250$ ohms (bypassed).....	100	150	Milliamperes
Zero-Bias Plate Current, Each Section			
$E_f = 6.3$ volts, $E_b = 40$ volts, $E_c = 0$	110	190	Milliamperes
Transconductance, Each Section			
$E_f = 6.3$ volts, $E_{bb} = 135$ volts, $R_k = 250$ ohms (bypassed).....	5800	8200	Micromhos
Amplification Factor, Each Section			
$E_f = 6.3$ volts, $E_{bb} = 135$ volts, $R_k = 250$ ohms (bypassed).....	1.4	2.6	
Negative Grid Current, Each Section			
$E_f = 6.3$ volts, $E_{bb} = 135$ volts, $R_k = 250$ ohms (bypassed), $R_g = 1.0$ meg.....	—	2.0	Microamperes

† Without external shield.

‡ Operation with fixed bias is not recommended.

§ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

ELECTRONIC COMPONENTS DIVISION
GENERAL  ELECTRIC

Schenectady 5, N. Y.