

27M13

SEVEN STAGE PHOTO-MULTIPLIER

GENERAL

The 27M13 is a seven stage Photo-multiplier having a blue sensitive cathode and twin anodes. Its sensitivity in typical operation is 2.5 amps/lumen. The cathode surface is of Caesium Antimony. ←

RATING

Supply Voltage, Secondary Cathode k8 to photo-cathode k1 (DC or Peak AC) (max)	(volts)	$V_{k8-k1}(\text{max})$	900
Supply Voltage, Anodes to Secondary Cathode k8 (max)	(volts)	$V_{a-k8}(\text{max})$	125
Maximum Anode Current	(mA)	$I_a(\text{max})$	1.0
Photo Cathode Sensitivity (average)	($\mu\text{A/lumen}$)	$S_{k1}(\text{av})$	20.0* ←

* All secondary cathodes and anodes joined, and at a potential of 100 volts to photo-cathode, measured with a light area 5.0 mm $\times$ 20 mm and a tungsten filament lamp having a colour temperature of 2,700°K.

All Maximum ratings are Absolute values, not Design Centres.

DIMENSIONS

Maximum Overall Length	(mm)	94
Maximum Seated Height	(mm)	80
Light Centre to Seat	(mm)	49.2 ± 2.4
Maximum Bulb Diameter	(mm)	29.5
Maximum Base Diameter	(mm)	33.4
Cathode Length	(mm)	24
Cathode Width	(mm)	8
Approximate Nett Weight	(ozs)	$1\frac{3}{4}$
Approximate Packed Weight	(ozs)	$4\frac{3}{4}$

MOUNTING POSITION—Unrestricted

27M13

SEVEN STAGE PHOTO-MULTIPLIER

TYPICAL OPERATION

Voltage between Anodes and Secondary Cathode k_8 (volts)	V_{a-k_8}	50
Voltage per Stage (volts)	V_{stage}	125
Maximum Anode Dark Current (per Anode) (μA)		0.25*
Luminous Sensitivity (per Anode) (A/lumen)		2.5† ←
Average Current Amplification (per Anode)		125,000‡ ←


* With 125 volts between Anode and Secondary Cathode k_8

† With a colour temperature of 2,700°K and a light area of 5.0 mm $\times$ 20 mm.

‡ Ratio of anode to photo-cathode sensitivities.

NOTE.—The Secondary Cathode voltage potentiometer should have a bleed current of at least ten times the maximum output current.

BASE—B11A (11 pin sub-Magnal)





27M13


SEVEN STAGE PHOTO-MULTIPLIER



CONNECTIONS

Pin 1	Secondary Cathode 2	k2
Pin 2	Secondary Cathode 3	k3
Pin 3	Secondary Cathode 4	k4
Pin 4	Secondary Cathode 5	k5
Pin 5	Secondary Cathode 6	k6
Pin 6	Secondary Cathode 7	k7
Pin 7	Secondary Cathode 8	k8
Pin 8	Anode 1	a1
Pin 9	Anode 2	a2
Pin 10	Internal Connection	IC
Pin 11	Photo-cathode	k1

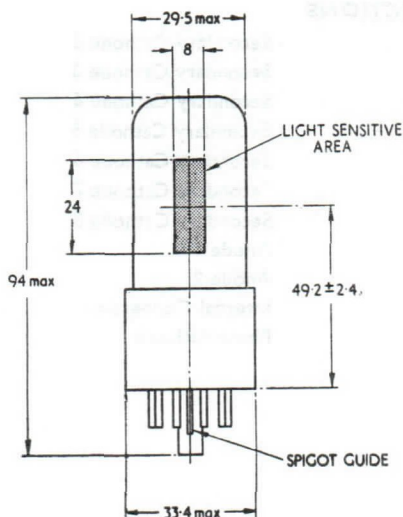


27M13**SEVEN STAGE PHOTO-MULTIPLIER**

All dimensions in mm.

27M13**SEVEN STAGE PHOTO-MULTIPLIER.****AVERAGE CHARACTERISTIC CURVE: S/λ**

Spectral Response of Photo-Cathode for equal values of Radiant Flux at all Wavelengths.

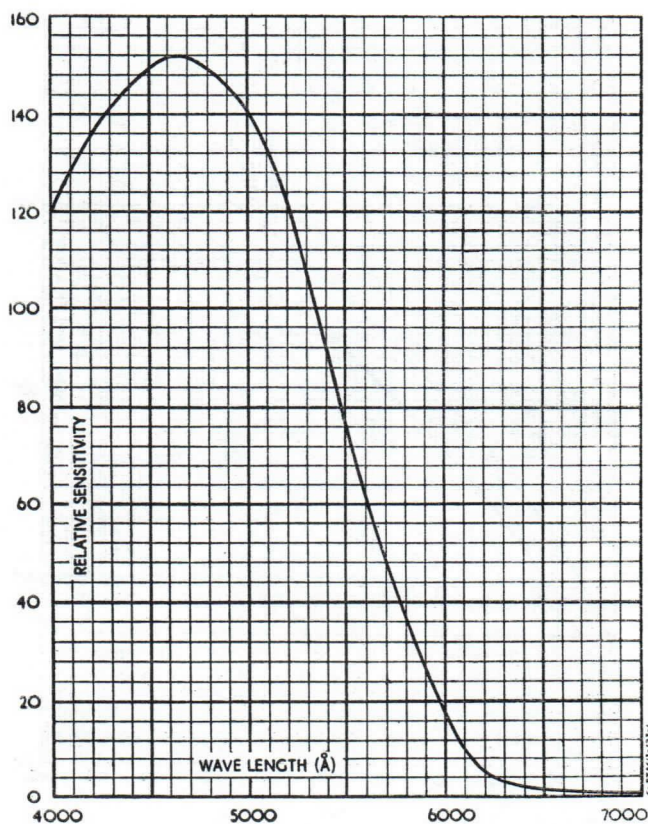

27M13**SEVEN STAGE PHOTO-MULTIPLIER**

CHARACTERISTIC CURVES (D.C. OPERATION)
Sensitivity and current amplification for each anode

