



BEAM PENTODE

FOR AF POWER AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING

The 6CA5 is a miniature beam pentode designed primarily for use in the audio-frequency power output stage of radio and television receivers. The tube features high power sensitivity at relatively low plate and screen voltages.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC.....6.3 Volts

Heater Current.....1.2 Amperes

Direct Interelectrode Capacitances, approximate*

Grid-Number 1 to Plate: (g1 to p).....0.5 pf

Input: g1 to (h+k+g2+b.p.).....15 pf

Output: p to (h+k+g2+b.p.).....9 pf

MECHANICAL

Operating Position—Any

Envelope—T-5½, Glass

Base—E7-1, Miniature Button 7-Pin

MAXIMUM RATINGS

DESIGN-CENTER VALUES

Plate Voltage.....130 Volts

Screen Voltage.....130 Volts

Positive DC Grid-Number 1 Voltage.....0 Volts

Plate Dissipation.....5.0 Watts

Screen Dissipation.....1.4 Watts

Heater-Cathode Voltage

Heater Positive with Respect to Cathode

DC Component.....100 Volts

Total DC and Peak.....200 Volts

Heater Negative with Respect to Cathode

DC Component.....Volts

Total DC and Peak.....200 Volts

Grid-Number 1 Circuit Resistance

With Fixed Bias.....0.5 Megohms

With Cathode Bias.....0.5 Megohms

Bulb Temperature at Hottest Point.....180 C


Design-Center ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under normal conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube in average applications, making allowance for normal changes in operating conditions due to rated supply-voltage variation, equipment component

variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of the tube under consideration and of all other electron devices in the equipment.

The equipment manufacturer should design so that initially no design-center value for the intended service is exceeded with a bogey tube under normal operating conditions at the stated normal supply voltage.

PHYSICAL DIMENSIONS



EIA 5-3

TERMINAL CONNECTIONS

Pin 1—Cathode and Beam Plates

Pin 2—Grid Number 1

Pin 3—Heater


Pin 4—Heater

Pin 5—Grid Number 1

Pin 6—Grid Number 2 (Screen)

Pin 7—Plate

BASING DIAGRAM



EIA 7CV

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER

Plate Voltage.....	110	125 Volts
Screen Voltage.....	110	125 Volts
Grid-Number 1 Voltage.....	-4.0	-4.5 Volts
Peak AF Grid-Number 1 Voltage.....	4.0	4.5 Volts
Plate Resistance, approximate.....	16000	15000 Ohms
Transconductance.....	8100	9200 Micromhos
Zero-Signal Plate Current.....	32	37 Milliamperes
Maximum-Signal Plate Current, approximate.....	31	36 Milliamperes
Zero-Signal Screen Current.....	3.5	4.0 Milliamperes
Maximum-Signal Screen Current, approximate.....	7.5	11 Milliamperes
Load Resistance.....	3500	4500 Ohms
Total Harmonic Distortion, approximate.....	5	6 Percent
Maximum-Signal Power Output.....	1.1	1.5 Watts


NOTES

* Without external shield.


The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or ele-

ments. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.


AVERAGE PLATE CHARACTERISTICS

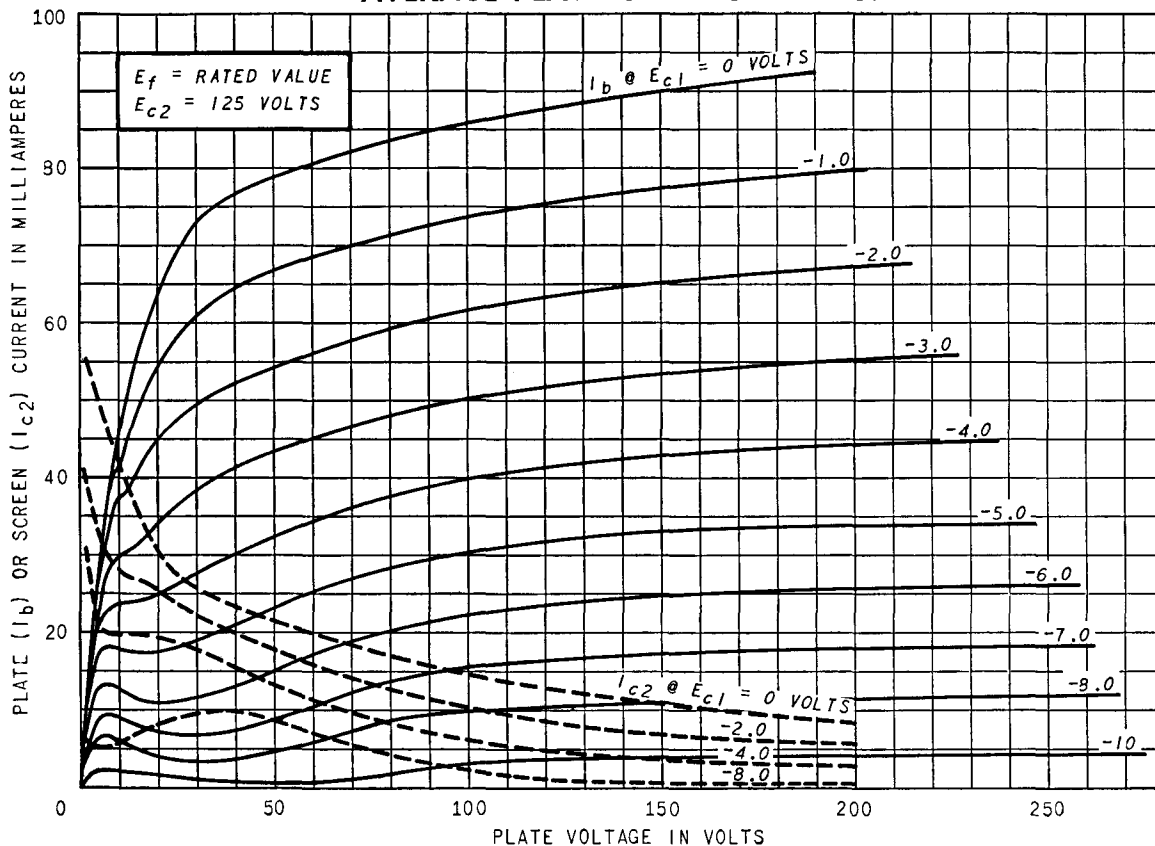


AVERAGE PLATE CHARACTERISTICS

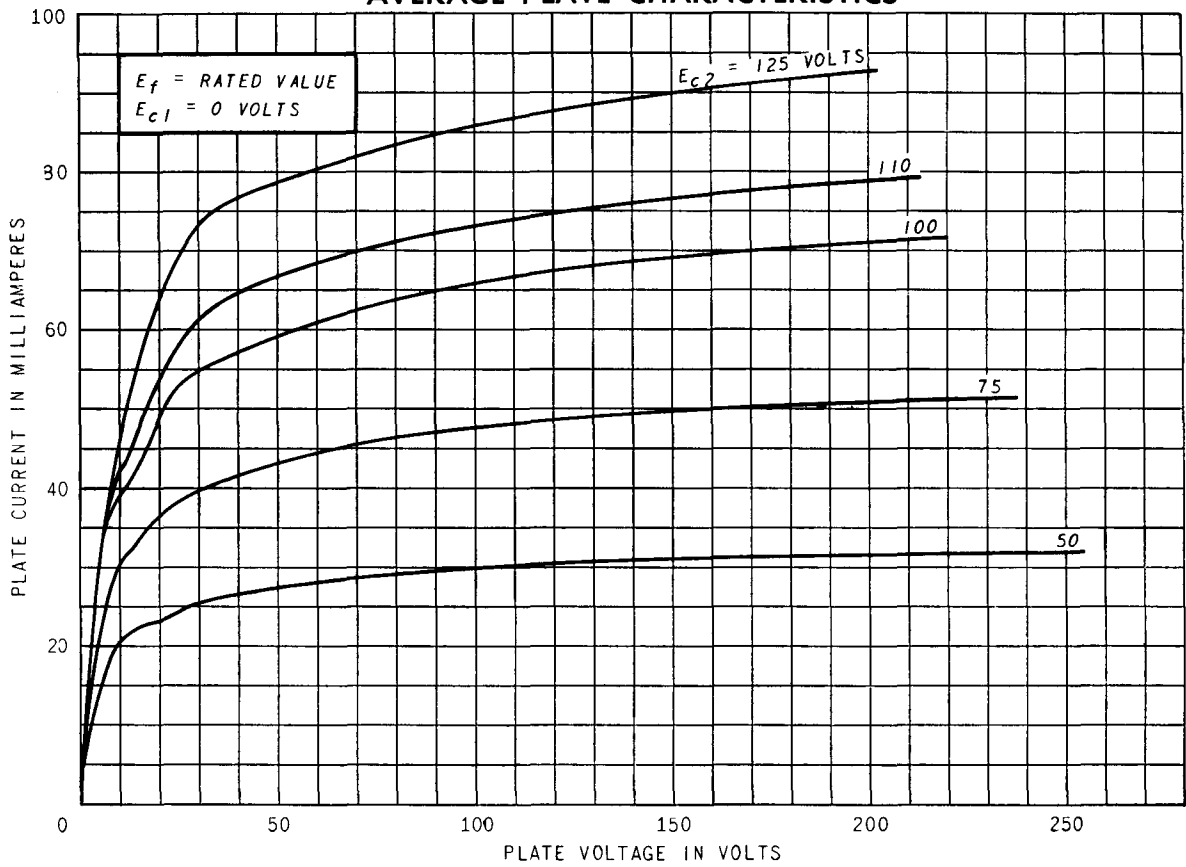


AVERAGE TRANSFER CHARACTERISTICS

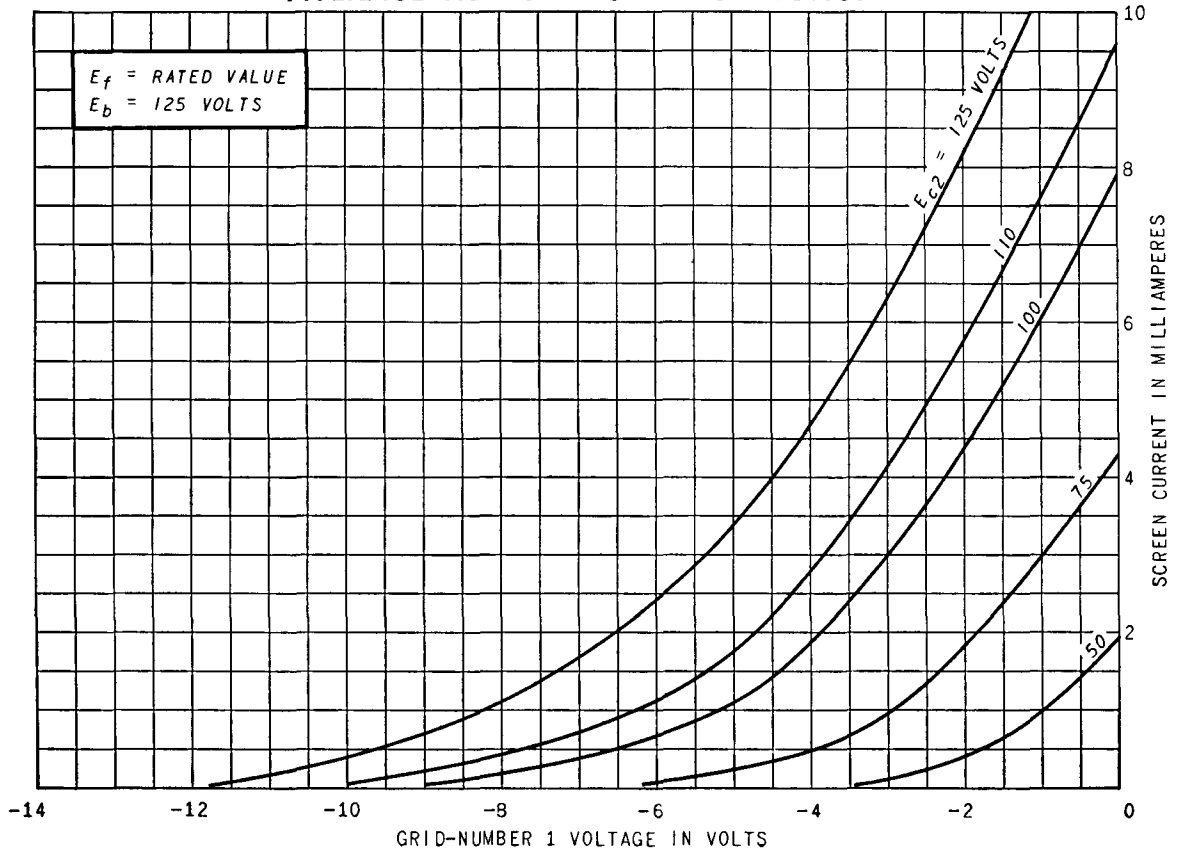

AVERAGE TRANSFER CHARACTERISTICS

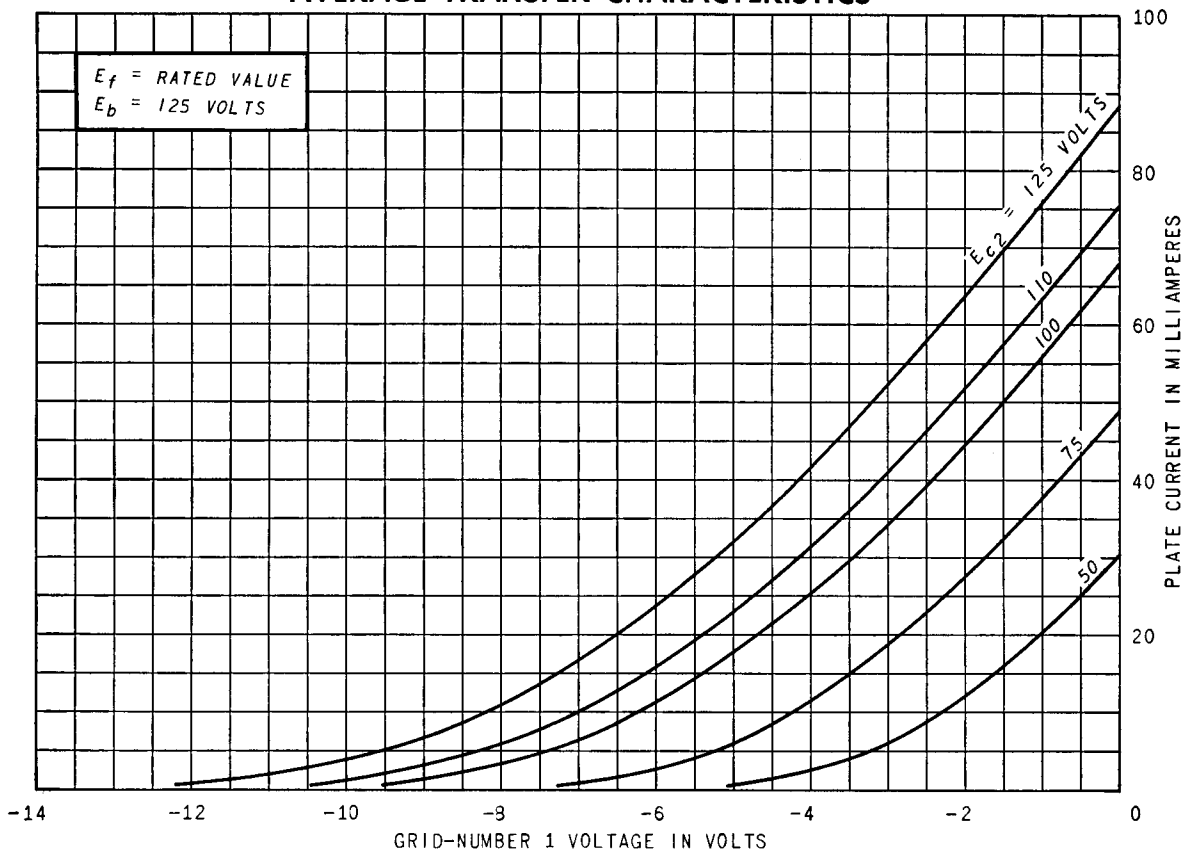

OPERATION CHARACTERISTICS

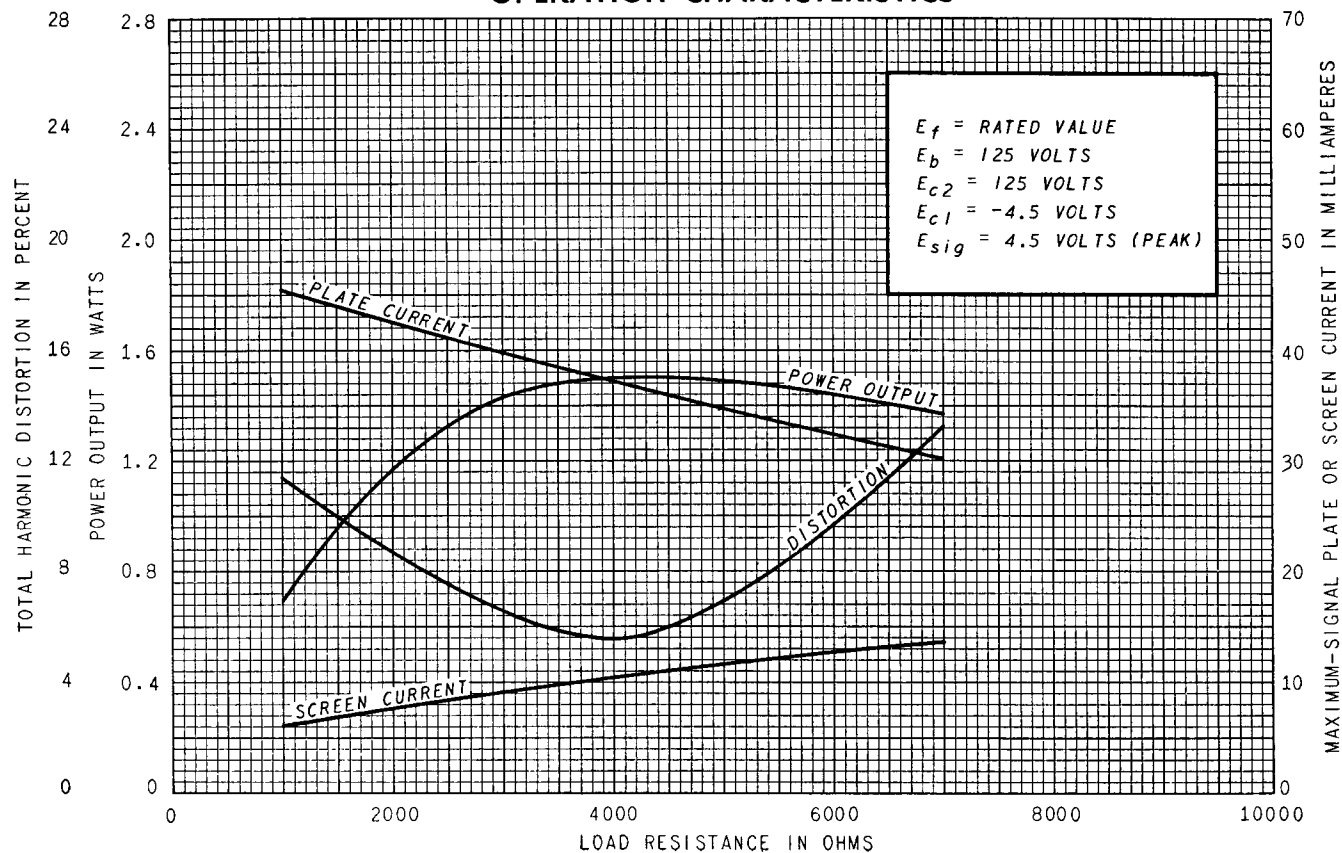

OPERATION CHARACTERISTICS

